


REGION 2 – ROCKY MOUNTAIN REGION

BOUNDARY MANAGEMENT CONTRACT SPECIFICATIONS

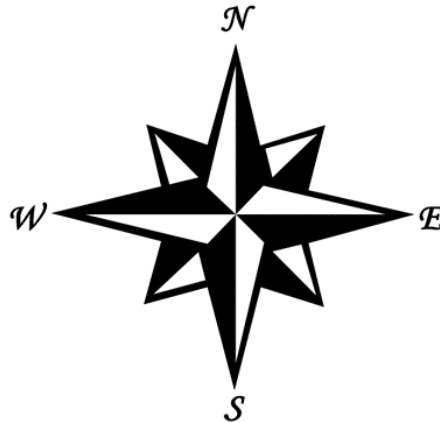

This Region 2 Boundary Management Contract Specifications document contains the specifications and exhibits that will apply to all Forest Service Region 2 Boundary Management and Cadastral Survey Projects.

Please retain this booklet in a permanent file.

All Region 2 Boundary Management, Cadastral and Land Survey solicitations will include the enclosed material by reference only, except for project specific supplemental specifications and exhibits which will be furnished with each particular project.

Contractor:	TBD
Contract Number:	TBD
Project:	Indefinite Delivery Indefinite Quantity A&E Services for Boundary, Cadastral, and Land Surveying Services
Location:	Region 2
Awarding Office:	USDA Forest Service, Business Operations, Procurement and Property Services, Intermountain Zone

Rocky Mountain Region 2
BOUNDARY MANAGEMENT
CONTRACT SPECIFICATIONS

REGION 2 BOUNDARY MANAGEMENT CONTRACT SPECIFICATIONS

CONTENTS

CONTENTS	2
GENERAL SPECIFICATIONS	4
C-1 SCOPE OF CONTRACT	4
C-2 DESCRIPTION OF SERVICES.....	4
C-3 LOCATION	4
DEFINITIONS.....	5
C-4 MATERIALS.....	7
A. Government Furnished Property.....	7
B. Contractor Furnished Materials.....	7
C. Materials Specifications	7
C-5 TECHNICAL SPECIFICATIONS – CADASTRAL SURVEYS	7
.100 RESEARCH	8
.110 Record Research	8
.120 Adjoiner Notification.....	8
.130 Conflicts, Boundary and Title Disputes.....	8
.140 Technical Advice	8
.200 CORNER SEARCH, EVALUATION AND DOCUMENTATION	9
.210 Field Search	9
.220 Corner Documentation.....	9
.230 Corner Reporting	Error! Bookmark not defined.
.300 CONTROL SURVEY, FIELD DATA COLLECTION AND COMPUTATIONS	10
.310 Survey Methods and Procedures.....	10
.320 Survey Standard.....	11
.330 Field Notes.....	11
.340 Survey Control Diagram and Computations.....	13
.400 CORNER MONUMENTATION, PERPETUATION, AND ACCESSORIES.....	14
.410 Monumentation.....	14
.420 Bearing Trees and Other Accessories	15
.430 Corner Recordation.....	16
.500 BOUNDARY LINE LOCATION, MARKING AND POSTING	17
.510 Locating Boundary Lines.....	17
.520 Marking the Property Line.....	17
.530 Posting the Property Line	18
.540 Obliteration of Erroneous Lines	19
.600 PLATS	19
.610 Content.....	20
.620 Review	20
.630 Geodetic Position	20
.640 Filing or Recording of Plats.....	20
.650 Digital Copy of Plat	20
TECHNICAL SPECIFICATIONS – MAINTENANCE.....	20
.700 CORNER MAINTENANCE	20
.710 Monument Maintenance	21

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.720 Bearing Trees and Accessories Maintenance	21
.730 Selection, Measurements, Blazing, Painting, Scribing and Signing	21
.740 Corner Recordation	21
.750 Corner Coordinates	22
.800 BOUNDARY LINE MAINTENANCE	22
.810 Scope of Boundary Maintenance	22
.820 Boundary Posts and Signs	23
.830 Erroneously Located Sign Posts	24
.840 Encroachments	24
.850 Gaps in Sign Posting	24
.860 Boundary Line Resurvey	24
.900 MISCELLANEOUS SERVICE	24
.910 Surveyor's Report	24
.920 Encroachment Diagram	25
.930 Photos	25
.940 Project Documentation	25
.950 Quality Control, Inspection & Acceptance	25
.960 Other Surveys	26
.970 Special Designated Area Boundary Surveys	29
SECTION J - EXHIBITS	30
J-2 TABLE OF EXHIBITS FOR CADASTRAL SURVEYS	30
EXHIBIT .120 - EXAMPLE LETTER TO ADJOINERS & REPLY CARD	31
EXHIBIT .130 - EXAMPLE CONFLICT REPORT	33
EXHIBIT .220 - EXAMPLE FS CORNER CARD (Form 7100-52)	34
EXHIBIT .411 - PLACEMENT OF CORNER MONUMENTS	36
EXHIBIT .412 - TYPICAL PLACEMENT OF REFERENCE MONUMENTS	37
EXHIBIT .413 - TYPICAL STAMPING OF MONUMENTS, METES AND BOUNDS	38
EXHIBIT .414 - CORNER TREES	39
EXHIBIT .423 - BEARING TREES	40
EXHIBIT .424 - SIGNS	41
EXHIBIT .430 - COLORADO CORNER RECORDATION	42
EXHIBIT .430 – (INTENTIONALLY LEFT BLANK)	Error! Bookmark not defined.
EXHIBIT .430 – (INTENTIONALLY LEFT BLANK)	Error! Bookmark not defined.
EXHIBIT .521 - SIGN PLACEMENT	45
EXHIBIT .522 - MARKING AND POSTING THE BOUNDARY LINE	46
EXHIBIT .600 - EXAMPLE PLAT	48
EXHIBIT .620 - CADASTRAL PLAT CHECKLIST	49
EXHIBIT .910 - EXAMPLE SURVEYOR'S REPORT	51
EXHIBIT .962 - RIGHT OF WAY SURVEY CHECKLIST	54

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

GENERAL SPECIFICATIONS

C-1 SCOPE OF CONTRACT

The intent of this contract is to obtain the land surveying services listed in the schedule of items in accordance with the specifications and exhibits. The Contractor shall furnish all labor, supervision, transportation, equipment, supplies and materials, except the [Government furnished property](#) specified, necessary to complete the work as specified.

All contracted work shall be performed by, or under the direct supervision of, a person licensed to practice surveying in the State(s) where the project is located and be in good standing with the respective State(s) license governing board. The survey shall comply with all applicable State and Local laws and regulations, as well as all applicable portions of the appropriate GLO/BLM Manual of Surveying Instructions and Specifications in this document providing they are not less than these requirements set forth herein.

C-2 DESCRIPTION OF SERVICES

Projects consist of performing all work necessary to properly subdivide and delineate Government Lands as specified in a task order. Such items as corner search and evaluation, control survey and monumentation, property line posting, creation of a Plat, and reports are integral to this project.

The work to be performed under this contract may include, but is not limited to, boundary surveys, retracement and/or dependent resurveys of PLSS rectangular surveys, Homestead Entry surveys, Mineral Surveys, marking and posting of National Forest and Grassland Property Boundaries, Land Claim Surveys, Road/Trail Rights-of-Way surveys, Small Tracts Act and Townsite Act surveys, Special Designated Area surveys, topographic surveys, remote sensing (aerial photogrammetry, bathymetry, etc.), computer aided drafting, miscellaneous services, as well as any other work incidental to the survey profession. Work may also include the maintenance of previously surveyed, marked & posted property lines and corners.

Individual projects will be described in a Scope of Work (or Scope of Contract) for each task order including any supplemental specifications to these specifications and contract Time. Each task order will contain;

Exhibit 1 - Vicinity Map;

Exhibit 2 - Corner and Ownership Status; &

Exhibit 3 – Work to be Accomplished; as well as any other clarifying exhibits as necessary.

A single exhibit may encompass all the information detailed in Exhibits 1-3.

C-3 LOCATION

The contract area includes portions of National Forest and Grasslands in Region 2; Colorado and Wyoming. Task orders will be issued when the Government determines its specific surveying needs. Supplemental specifications and exhibits for individual project work sites will be provided with the task orders issued by the Government.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

DEFINITIONS

Administrative Survey: The line separating areas of differing management objectives, such as Wilderness, Research Areas, Administrative Sites, etc., from areas of general multiple use management.

BLM: Bureau of Land Management.

BLM Manuals: A reference to [BLM publications](#), mainly the appropriate year of the “[2009 Manual of Surveying Instruction](#)”. Also included are BLM reference pamphlets but not limited to, “[Restoration of Lost or Obliterated Corners and Subdivision of Sections](#)”, “[Corner Identification and Markings](#)”, “[Durability of Bearing Trees](#)”, etc.

BT: Bearing Tree.

Boundary Line: The line separating lands of the Government from its adjoiners.

CDA: Congressionally Designated Area.

CO: The Contracting Officer has authority to enter into, administer, or terminate contracts and make related determinations and findings.

COR: The Contracting Officer’s Representative is a government official appointed in writing by the contracting officer who provides technical direction, clarification, and guidance with respect to the contract specifications and statement of work.

Contractor: The firm selected by the proponent with the approval of the Forest Service shall hereinafter in these specifications be referred to as the “Contractor”.

Control Survey: A survey which provides the horizontal or vertical position data for the support and control of subordinate boundary surveys.

Coordinate file: A comma-separated-values file consisting of a data table with the minimum of Point Name, Northing, Easting, Elevation, and Description information for each.

d.b.h.: Diameter at breast height, typically measured 4.5 feet above ground on the side of tree facing monument.

Encroachments: Improvements occupied or used on National Forest System land under claim of title or color of title. (36 CFR 254.31)

GLO: General Land Office, precursor to the BLM.

GNSS: Global Navigation Satellite System, including Global Positioning System (GPS - USA) and; GLONASS (Russia), BeiDou (China), Galileo (Europe), QZSS (Japan), IRNSS (India), and any new constellations developed.

Inspector: A person designated by the CO or COR to inspect work performed by the Contractor.

Intervisible Point: A point from which an observer standing on the ground at a post or sign can see the next post or sign on the projected line ahead AND the previous post or sign on the line behind.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

Maintenance: Maintenance is the act of bringing previously surveyed, marked & posted boundary lines and corner monumentation of various conditions back to current standards. This infrastructure can degrade over time from environmental and human factors among others.

PLSS: Public Land Survey System as defined by the BLM.

Plat: The term “plat” as used in these specifications and exhibits is defined as a Certificate of Survey, Record of Survey, Parcel Map or Subdivision Map in accordance with applicable state law and local ordinances.

ROW: Right of Way.

Record Data: Prior survey data, including but not limited too; deeds, record of surveys, corner cards, parcel maps, lot line adjustments, subdivisions maps, easements, judgements, field verified evidence, unrecorded maps, parol evidence, exhibits, BLM/GLO furnished data, FS furnished data, etc.

Tie Line: A survey connection from a point or corner on a boundary line to a point whose position is required, or a connection to close a survey on a previously determined point.

Trespass: To go on another's land or property unlawfully; an illegal act causing injury to the person or to the relative rights of another's property; also, legal action for damages resulting from trespass (FSH 5509.11, Zero Code). Trespass includes constructing, placing, or maintaining any kind of road, trail, structure, fence, enclosure, communication equipment, significant surface disturbance, or other improvement on National Forest System lands or facilities without a special-use authorization, contract, or approved operating plan when such authorization is required. (36 CFR 261.10)

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

C-4 MATERIALS

A. Government Furnished Property

All Government-furnished property will be provided as needed at a location specified by the CO or applicable COR.

The Government shall furnish the following listed items:

1. All signs required by the Specifications (see [Exhibit .424](#)).
 - a. 54-2 Property Boundary Signs or Decal Stickers
 - b. 54-3 Bearing Tree Signs
 - c. 54-6 Location Tags
 - d. 54-9 Land Survey Monument Signs or Decal Stickers
2. Monuments.
 - a. Steel or aluminum pipes with brass or aluminum caps.
 - b. Brass or aluminum tablets suitable for placement in concrete or stone.
 - c. Aluminum caps for use with 5/8" 'rebar' or other drive type monuments.
3. Metal delineator posts or red steel angle iron posts as provided.
4. Underground magnetic markers.
5. Forest Service supplied data including but not limited to corner cards, and field notes and plats from prior surveys. This data may not be accurate or complete and shall be considered only as informational. The Contractor shall be responsible for its acceptability.

All Government-furnished property will be provided as needed at a location specified by the CO or the COR. The Contractor shall give a minimum of 48 hours prior notice to the materials delivery. Deliveries will be made only during the Government's normal business hours.

B. Contractor Furnished Materials

The Contractor shall furnish all materials required to accomplish the work, except for the Government-furnished materials (Refer to Section [C-2.4 A.](#));

At the termination of the contract, all items branded Forest Service (signs, monuments, etc.) and posts shall be returned to the COR.

C. Materials Specifications

1. 16D, 3 inches or longer aluminum nails shall be used for fastening signs to trees and shall be of such length/size as necessary to penetrate firmly into the tree's sapwood/heartwood layer leaving a 1/2" of nail length exposed to allow for tree growth ([Exhibits .414, .423](#)).
2. Control traverse points – 6 inch 60D nail or larger steel spike.
3. Guard stake lath – 4 feet x 3/8 inch x 1-1/2 inches or larger if needed.
4. Paint – Spray Paint, Oil Based, Enamel, in the color specified otherwise, Safety Red or similar.
5. Flagging – Pink or as specified.

C-5 TECHNICAL SPECIFICATIONS – CADASTRAL SURVEYS

All surveys necessary to define National Forest boundaries shall comply with applicable state laws and regulations. Where state laws and regulations are less restrictive than the specifications contained herein, these specifications shall apply. In Public Land Survey System (PLSS) States, the principles and practices as set forth in the BLM Manuals, as well as applicable state laws, shall be followed. Where these specifications differ from the Manuals, these specifications shall apply.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.100 RESEARCH

.110 Record Research

It is the Contractor's responsibility to research the real property records of public agencies to obtain the title and survey history of the subject property and relevant adjoining properties. The Forest Service shall provide the Contractor access to National Forest System landownership status, corner search and survey files at the time of award.

Errors & significant inaccuracies pertaining to title and boundary found in Government-supplied records shall promptly be reported to the COR. However, any information given to the Contractor by the Government shall be construed as being for informational purpose only, and the sole responsibility for its accuracy, completeness, and/or verification rests with the Contractor.

.120 Adjoiner Notification

Prior to the start of field work, the Contractor shall contact affected adjoiners of Government land by mail to secure permission to access/enter their lands to survey, mark accessories, and mark and post boundary lines. Some State Laws may require certain statements to be included in these contact letters. The Contractor shall furnish the Government documentation of such contacts listed in the following categories: Adjoiners who have granted permission; those who have granted conditional permission, specifying conditions or restrictions; those who have denied permission; and those who are non-responsive within 14 calendar days of attempted contact. The format of a written request and reply card shall be similar to that shown in [Exhibit .120](#).

Should permission for access be denied, the Contractor shall notify the COR immediately and relay such information giving names, dates, and text of conversations which have taken place between the landowner(s) and the Contractor. For those areas of the boundary line where permission has been denied, the Contractor will then notify the COR and appropriate action will be taken on a case-by-case basis.

.130 Conflicts, Boundary and Title Disputes

The Government will inform the Contractor of any known or suspected conflicts of survey, possession, occupation, or title along the boundary lines to be surveyed. Any conflicts discovered by the Contractor during the course of the project shall be reported to the COR as soon as practical, followed within five (5) days after verification with written documentation in a format like that in [Exhibit .130](#), see [.920 Encroachment Diagram](#). Conflicts will be annotated on the appropriate certified documentation e.g. Survey Report and Record of Survey per State Statues.

The Contractor is not required to resolve title or possession conflicts but is required to report facts and any professional opinions that may be relative to the conflict. For all surveys, the Contractor shall be prepared to testify in court, if called upon by the U.S. Attorney. In consideration of the performance of such services, payment will be made by the Department of Justice in accordance with its prescribed regulations and procedures.

An equitable adjustment of contract performance time or contract price may be made for any addition or deletion of survey work authorized by the Contracting Officer resulting from a conflict. If the conflict is resolved within the contract time limits, the Contractor shall mark the disputed boundary line and corners as specified.

.140 Technical Advice

All requests submitted to the Bureau of Land Management (BLM) for technical advice on survey matters shall be in written form. The request shall be sent directly to the BLM with copies sent to the COR. The letter shall include the following:

1. Contractor name.

Rocky Mountain Region 2
BOUNDARY MANAGEMENT
CONTRACT SPECIFICATIONS

2. Name of COR.
3. cc's indicating copies have been sent to the CO and COR.

The request shall be routed through the COR if the request involves a dispute or conflict between private surveyors. A request for technical advice shall be sent by the COR in cases of un-resolvable differences of opinion between the COR and Contractor regarding survey matters incident to the project. The BLM's formal response shall be adhered to by the Contractor.

.200 CORNER SEARCH, EVALUATION AND DOCUMENTATION

The Contractor shall make an investigation of all corners as indicated on Exhibit 3. Every corner used as a part of the survey must be independently verified by or under the direct supervision of the licensed land surveyor in responsible charge as to authenticity of corner evidence and integrity of the monumented position.

.210 Field Search

The Contractor shall investigate and search for monuments and other physical evidence as indicated on Exhibit 3. An extensive on-the-ground search of the project area shall be conducted to obtain evidence left by previous surveys, including original monuments and accessories, such as bearing trees, line trees, and reference objects. When searching and evaluating the physical evidence of the original corner monument and accessories, the utmost professional care shall be taken to protect and preserve the evidence. The Contractor shall notify the COR prior to reestablishing any lost or obliterated PLSS corner.

One of three difficulty levels is identified for each corner, or the whole project;

Level 1 - Difficult Applies to recovery of corners originally set with stone or wood post monuments, or later surveys with extensive obliteration as determined by the COR.

Level 2 - Normal Applies to brass-cap era surveys.

Level 3 - Easy As determined by the COR, corner search may not be applicable if the survey is a recent (10 years or less) aluminum/brass cap survey *or* if corners have been recovered by the USDA Forest Service. Corner documentation is still required.

A ***Traverse Add-on*** applies where conventional traverse is required to obtain all or most of the required positions, as in dense forest or deep canyon. This item is paid on a per-mile basis in addition to the per-corner item paid in Levels 1-3 above, at the discretion of the COR.

.220 Corner Documentation

When a corner has been found, monumented, or determined to be lost or obliterated, the Contractor shall state this in the field book and on either a state/county corner record form (see [Exhibit .430](#)) or Record of Survey. In the recorded document the Contractor shall address each corner monument or accessory of prior record and explain the rationale used to harmonize conflicting evidence, if any, in sufficient detail to allow another competent surveyor to examine and accept the solution without consulting additional records. In some cases, the COR may direct the Contractor to document the form on a corner card, form FS-7100-52, as indicated on [Exhibit .220](#), rather than a state/county corner record form or Record of Survey.

All PLSS corners noted in the field notes and documents shall be referred to and numbered or named by BLM's [Geographic Coordinate Data Base](#) (GCDB) System numbering scheme.

.300 CONTROL SURVEY, FIELD DATA COLLECTION AND COMPUTATIONS

.310 Survey Methods and Procedures

The Contractor shall select the methods and instruments to be used for field data collection and boundary location. Methods such as photogrammetry, traverse, triangulation, GPS/GNSS systems may be used. The system selected shall meet the positional tolerance requirements described in the specifications.

.311 The Position of Each Corner

The position of each corner established or tied shall be determined by a closed traverse loop, redundant radial survey ties and/or point positioning procedure designed to meet the standards in [.320 Survey Standard](#).

.312 Determination of Bearing

All bearings shall be referenced to a published coordinate system and datum, with the method of determination noted in the field notes and plat. A Record Basis of Bearing is acceptable when referenced to an official Government or Private survey of Public Record. A GPS Basis of Bearing shall be established as described in [.321 Global Navigation Satellite System](#). If compass bearings are used for corner accessories, the contractor shall include the declination used and method of determination. Use of assumed bearings is not acceptable.

.313 Determination of Distance

All distance measuring equipment used in conjunction with this contract shall be calibrated annually or per manufacturers recommendation (whichever is more frequent) and results given to the COR upon request. Distances will be reduced and reported as "Ground Distances" when using GNSS.

.314 Marking the Survey Point

Survey points shall be marked with the minimum of a 60D nail or larger firmly anchored and identified with appropriate point number written on attached flagging, as a minimum. When conditions warrant, a guard stake or lath shall be placed alongside the point with identification.

.315 Clearing of Survey Lines

No trees larger than 6 inches DBH shall be cleared along survey ties (not along boundary) without the permission from the CO/COR. Clearing shall not be performed on private property without prior permission of the landowner. Under no circumstance shall fruit, shade or ornamental trees, shrubs, or hedges in residential or developed areas be blazed, marked, or severed. All cut trees shall not be left leaning against or hanging in standing trees.

.316 Boundary Line Survey Ties

The Contractor shall locate and tie the following items to the control survey system:

1. All corner monuments including accessories, cutting boundary monuments and other evidence indicating a previous survey, whether recorded or not, along the boundary.
2. Visible signs of possession such as structural improvements, limits of timber cutting, mining operations, fences, plowed fields, etc.
3. Major topographic or cultural features such as highways, roads, railroads, trails, streams, and ridges crossing the boundary line.

All items located will be shown on either; the survey map exhibit, plat, or encroachment diagram. The document showing these items will be approved by the COR and may be in any combination of the deliverable documents.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.320 Survey Standard

The positional accuracy as published by the National Geodetic Society (NGS) is the radius of a circle or an ellipse of uncertainty, such that the true or theoretical location of the point falls within that circle or ellipse 95% of the time (1.96σ).

- Project control and/or control for new monumentation shall be no less than Third-Order, Class I (1:10,000) with a linear error of closure not exceeding 2.0 feet before angular adjustment.
- Surveys for marking and posting shall be no less than Third-Order, Class II (1:5,000).

A closure or processing report may be requested by the COR at any time and shall be supplied by the contractor.

.321 Global Navigation Satellite System (GNSS)

Geodetic/survey grade GNSS equipment and methods may be utilized for measurements when it saves cost and/or time compared to conventional methods and the forest tree canopy is such to allow its use. Using multiple satellite systems (GPS, GLONASS, Galileo, or BeiDou) capable equipment may significantly increase satellite density, accuracy, and production in heavy vegetation. At least one control corner for projects less than 1.5 miles in width and two minimum for larger projects shall be directly geo-referenced for entry into the corporate GIS database.

If GNSS is used, the surveyor must follow the “[Standards for Positional Accuracy for Cadastral Surveys Conducted Using GNSS](#)” AND “[Guidelines for the Use of Global Navigation Satellite Systems \(GNSS\) in Cadastral Surveys](#)” prepared by the United States Department of Agriculture – Forest Service and the United States Department of the Interior – Bureau of Land Management.

Local Accuracy Standards per Guidelines shall be used:

<u>Application</u>	<u>Semi-major axis 95 percent error ellipse</u>
Cadastral Project Control	Less than 0.025 (m)
Cadastral Corner Measurements	Less than 0.050 (m)

Caution: The use of GPS does not relieve the Contractor from the responsibility to search and evaluate all evidence of original corners and/or subsequent surveys along a surveyed line; to tie evidence of encroachment and occupation onto government or adjacent land; and to set sign posts as outlined in [Exhibit .521](#).

.330 Field Notes

Field notes shall be recorded in writing, in a standard waterproof field book, and/or by electronic data collectors. The method used shall provide a complete and accurate record of all field work. All recordings, whether written or electronic, shall be made neatly and logically to ensure legibility.

.331 Field Books

Errors shall be lined out and not erased. Legible photocopies (may be in digital format) of the original field books shall be furnished to the Government upon completion of the project.

Field books shall contain, at a minimum, the following data:

1. The contract and work order number and name shall be printed in ink on the cover of each book and each book shall be sequentially numbered.
2. Each book shall contain a small sketch and index page in the front of the book which will include a brief description of work and the corresponding page number.
3. Names and duties of each party member, weather conditions, instruments used, PPM or other correction for EDM, the location of the work performed, and the date shall be recorded each day work is performed.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

4. Field data collection and boundary layout notes shall be recorded in such a fashion as to allow another technically qualified person to retrace the survey without consultation with the Contractor.
5. Basis of bearing data shall be recorded in sufficient detail to permit an independent check.
6. Statements by adjoining or interested parties relative to boundary line and/or corner locations.
7. Field record of all corners found or monumented with a description of the monument and all accessories and remains of accessories. Descriptions shall include bearing, distance, and d.b.h. measurements.
8. Surveyor's Certificate: The following certification is to be made immediately following the last page used in the notebook:

I hereby certify that the foregoing notes represent work done under my direct supervision.

_____	_____
Date	Signature
_____	_____
State Registration No. and Seal	Title

.332 Electronic Field Book

An electronic copy of the field notes will be provided in an agreed upon format (PDF, DOC, TXT, etc.) at the end of the task order. The COR may request the document in its current form at any time during the course of the survey.

Field Notes shall contain, at a minimum, the following data:

1. The contract and work order number and name shall be listed in the title and header, sheet number with document overall number of pages to be added to the footer.
2. Names and duties of each party member, weather conditions, instruments used, PPM or other correction for EDM, the location of the work performed, and the date shall be recorded each day work is performed.
3. Field data collection and boundary layout notes shall be recorded in such a fashion as to allow another technically qualified person to retrace the survey without consultation with the Contractor.
4. Basis of bearing data shall be recorded in sufficient detail to permit an independent check.
5. Statements by adjoining or interested parties relative to boundary line and/or corner locations.
6. Field record of all corners found or monumented with a description of the monument and all accessories and remains of accessories. Descriptions shall include bearing, distance, and d.b.h. measurements.
7. Surveyor's Certificate: The certification is to be made immediately following the last page used in the notebook and the affixed seal and signature can be digital in nature.

I hereby certify that the foregoing notes represent work done under my direct supervision.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.333 Electronic Data Collectors

If the Contractor uses an electronic data collector, the following shall be furnished to the Government:

1. A printed copy containing the original field data prior to any manipulation or adjustments.
2. A separate written report showing:
 - a) The data format used, describing the data on the hard copy by line and column.
 - b) All descriptive codes and their meaning.
 - c) A small sketch of the project with an index showing the data contained on each type of media.

.334 Global Navigation Satellite Systems

The surveyor's project report should include the following:

1. Make and Model of the GNSS receiver, Antenna, and related equipment.
2. A processing generated report regarding the baseline processing results and the software and version number used, if completed.
3. If appropriate, network adjustment results including a summary of covariances, standard deviation or RMS values and the software and version number used. The NGS OPUS reports should be included if it was used in place of a network.
4. A diagram showing the location of control points within the project.
5. A list of final coordinates for control points or observed corner locations including project metadata such as datum, geoid model, epoch, and measurement units used. These coordinates should all be referenced to the most current realization of the NSRS.
6. Document any variations from these guidelines.

.335 Legible Copies

Legible copies of all field books used in conjunction with the collector which describe work done. In any case a complete description of all monumentation found, used, or set during the survey shall be provided by the contractor.

.340 Survey Control Diagram and Computations

The Contractor shall use professional judgment in determining the position of any corner to be established or re-established under this contract. If under subsequent review by the COR this judgment is not agreed to, then the situation, e.g., move corner monument and/or line posts, shall be rectified at the Contractor's expense.

.341 Survey Control Diagram

The Contractor shall provide a survey map exhibit to the COR upon request as soon as practical. The Contractor shall furnish the Government with a digital copy (or paper upon request) of the survey in its most current form. The size and file format of each exhibit shall be agreed upon with the CO/COR and should contain the following information.

1. Project name, contract number and date of exhibit.
2. Contractor's name or business name.
3. Project location including Township, Range and Base Meridian.
4. Dates of each revision.
5. Linear scale (showing sufficient detail).
6. Basis of Bearing, coordinate system, and datum.
7. Survey control stations and monuments tied or set, accurately plotted with names or numbers.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

8. Raw and final coordinate values and all boundary/control lines measurements between all corner monuments used, established, or re-established.
9. BLM Geographic Coordinate Data Base (GCDB) identifiers and reliability codes for all corner monuments.
10. References to survey field notes and all compiled record data ([Definitions](#)).
11. Tie and boundary lines shall be shown on the control diagram.

.342 Computations

A legible copy of all computations shall be provided if requested by the Government in AutoCAD .DWG format or by method agreed upon by CO/COR. Computations shall list survey control point names or numbers, survey field data and an applicable adjustment report. The adjustment report shall state the type of adjustment used (compass rule, grant boundary, least squares, etc.) including any applicable data and both raw and adjusted coordinate values for survey points and corner ties.

.400 CORNER MONUMENTATION, PERPETUATION, AND ACCESSORIES

.410 Monumentation

Monumentation shall comply with the BLM Manuals and be in accordance with [Exhibit .411](#). All original Government Land Office wooden posts shall be re-monumented. All other original Government boundary and Public Land Survey monuments found to be firmly set and legible shall be left in place, unless otherwise directed by the COR. The COR shall provide direction to the Contractor on a case-by-case basis whether to re-monument recovered monuments if; a found GLO Stone, previously set by a licensed land surveyor, unknown parties, or of other origin. All monuments and accessories shall have pink flagging attached if practical.

The Government will supply monuments for all Government boundary and Public Land Survey corners to be monumented or re-monumented by the Contractor as part of the survey (See [C-4A Government Furnished Property](#)). DEEP-1® magnetic memorials or suitable ferrous material such as a rebar iron spike shall be placed at the base of new pipe monuments, unless otherwise directed by the COR. Any corner position which cannot be monumented in its true location shall be referenced by witness corners or reference monuments only after a thorough review of Exhibit 8 and in consultation with the COR. Corner trees shall be marked and painted in accordance with Exhibit 10.

1. **Difficult** - Dig in, Using a standard USDA Forest Service 2 ½" x 30" Steel or aluminum pipes with brass or aluminum caps., or rock tablet.
2. **Easy** - Drive in, Using a drive rod or rebar and cap monument.

.411 New Monumentation Placement

Monuments shall be placed as illustrated in [Exhibit .411](#). Physical evidence of earlier surveys should be preserved when possible. Two clear color photographs (preferably digital) shall be taken of each original monument in place before disturbance. The Contractor shall bury original stones upside down in the hole alongside the new monument and place original wood posts near the new monument for inspection by COR. Brush and logging debris within a radius of 6 feet of the corner shall be cleared away when the monument is set. Line of sight to each bearing object existing or established shall also be cleared.

Monuments set by this survey shall be located to the tolerance requirements specified in Section [.310 Survey Methods and Procedures](#). Placement shall be in accordance with the BLM Manuals.

New monuments shall be solidly placed in earth (Exhibit .411) when possible. A magnetic memorial shall be placed at the base of new pipe monuments, unless otherwise directed by the COR. If applicable, the

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

Contractor should bury original monuments alongside the new monument. This information shall be recorded in the field book and documented in the pertinent Corner Record or Plat.

.412 Reference and Witness Monuments

Where it is impossible or impractical to place a monument at the true corner position, refer to the current version of the BLM Manuals. When the monument is susceptible to destruction or unoccupiable, a witness corner monument or reference monument shall be established. See [Exhibit .412](#) for examples.

.413 Monument Cap and Tablet Markings

Monument caps and tablets shall be stamped as prescribed in the current version of the BLM Manuals and [Exhibit .413](#). The caps or tablets shall also be stamped to include the year of survey and the surveyor's license number. If applicable, the stamping shall include any unique Forest Service tract or corner identification. If under subsequent review by the COR the marking is determined to be incorrect, the monument shall be re-stamped at the Contractor's expense.

.414 Corner Trees

When the corner position is coincident with a live, healthy tree, the tree shall be marked as prescribed in the current version of the BLM Manuals, or as directed by the COR. Painting and signing of tree monuments shall be in accordance with [Exhibit .414](#).

Corner trees shall be perpetuated with a reference monument which shall count as one of the required accessories. The monument shall be set a minimum of 15 feet from the base of the corner tree.

.415 Original GLO Line Trees

Positively identified original Government Public Land Survey line trees typically set by the GLO are monuments of the true property line (not to be confused with modern line trees set per other surveys such as those outlined in these specifications). When recovered in good condition the marks shall be painted and sign "Land Survey Monument", or equivalent Government sign substituted by the COR, shall be attached in accordance with [.424 Signing](#). When recovered in down and/or decayed condition the true position shall be re-monumented.

See BLM manual 6-28, perpetuating line tree 4-113 (4); When an accessory is necessary to evidence the position of a line tree, no requirements are set up other than to mark a bearing tree or a bearing object, if available, or to establish a suitable bearing object. A bearing tree is marked in the same manner as a bearing tree associated with an angle point.

.420 Bearing Trees and Other Accessories

Refer to the BLM Manuals for selection, measurement and marking of bearing trees and other objects. Limbs on bearing trees shall be removed to a height of 7 feet.

.421 Selection

All PLSS corners shall be referenced by at least two accessories. Bearing trees shall be in good health, 6 inches DBH or larger, and preferably located so the angular measure (from the corner) between any two trees is as close to 90 degrees as possible. If such trees are not available, bearing objects or reference monuments shall be substituted. Reference monuments shall be a 5/8"x24" or larger rebar with a 2" or larger aluminum cap, unless otherwise specified by the COR. Smaller trees shall be marked with an "X" at breast height and "BT" scribed at the base. Where conditions permit, all bearing trees or objects shall be located on Public Land. The COR may approve the use of alternative accessories in some situations such as the guard post.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

All corners common to four sections shall be referenced by a healthy tree or other suitable accessory in each section.

The Contractor shall use "[Durability of Bearing Trees](#)" as a guide when selecting bearing trees and shall take extra care to select trees that are healthy, free of defective tops, lack missing bark, and middle-age or younger whenever possible. The Government will provide a copy at the Pre-Work Conference.

.422 Measurements

All bearing trees shall be described by bearing and distance from the corner point (not from a reference monument or object). Bearings to trees shall be measured to the center of the root crown and distances measured to a nail set in a notch 6 inches above the ground side-center of the root crown. Other accessories shall be measured to an identified point. Distance shall be horizontal distance to the nearest 0.1 foot. Bearing shall be measured and reported to the nearest whole degree and must be within ± 2 degrees of the astronomic or geodetic meridian to the face of the blaze at the approximate center of the root crown measured radially from the corner. Basis of bearing shall be recorded in the field notes and/or on the Corner Record Card. Compass bearings shall include the declination used and method of determination. The species and diameter of bearing trees at breast height shall also be measured and recorded.

The method of measuring bearing tree locations (i.e., side center, etc.) as well as any deviations shall be noted on the field notes and Plat or Corner Record.

.423 Blazing, Scribing and Painting

Blazing, scribing, and painting shall be in accordance with the BLM Manuals, see [Exhibit .423](#). Smooth barked maple, alder, aspen, etc., shall not be blazed, but shall be scribed and painted as if blazed (bark scribed). Brush and debris shall be cleared to provide a line of sight between the corner monument and the bearing trees. Existing BTs are not to be re-blazed and/or re-scribed. Reference Monuments shall be marked in accordance with the Manual and bear the surveyor's registration number.

A band 6 inches in width shall be cleared of loose debris and painted with red paint the circumference of the BT at a height of five to seven feet above the ground.

.424 Signing

Available signs with identifying numbers are illustrated by [Exhibit .424](#).

1. Bearing Tree signing shall be in accordance with [Exhibit .423](#). Sign 54-3, "Bearing Tree," shall be placed on all newly created bearing trees and on all existing bearing tree remnants.
2. Sign 54-9 "Land Survey Monument" shall be placed on the back of all standing bearing trees - dead or alive.
3. A guard post with sign 54-9 or P71-10 decal attached shall be placed at all corner monuments in accordance with [Exhibit .521](#).
4. If bearing trees not available and monument falls within close proximity of a fence, the appropriate signs shall be placed on fence posts. (Sign 54-5 for rectangular PLSS corners, Sign 54-6 for section subdivisions and 54-8 signs for Homestead Entry and Mineral Surveys).

.430 Corner Recordation

The Contractor shall complete, in typewritten and/or electronic form, as specified by the Forest Service in accordance with state and local statutes, a Corner Recordation Form (or local equivalent) for each corner required by Exhibit 3 or by state and local statutes. After approval by the COR, the Contractor shall file the original in the appropriate jurisdiction. A copy of the original form with completed filing information shall be

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

furnished to the Forest Service. Refer to [Exhibit .430](#) for completion guidelines and sample of a completed form.

One original form FS-7100-52 may be requested for the task order for as requested by Exhibit 3. All information on the card shall be completed in accordance with [Exhibit .220](#).

.500 BOUNDARY LINE LOCATION, MARKING AND POSTING

The boundary lines to be marked, shown on Exhibit 3, shall be located by survey, unless work is to be performed as “Boundary Line Maintenance” in accordance with [.700 CORNER MAINTENANCE](#). The methods used shall ensure that posts, blazes on trees, and/or line monuments defining the boundary line have a positional tolerance meeting the standards of [.310 Survey Methods and Procedures](#).

In some instances, the COR may direct the Contractor not to perform certain work required under this section when marking lines in developed areas and areas near homes. This may include not painting blazes, increasing the blazing spacing, installing different kinds of signs or posts, increasing the post/sign spacing, or other measures.

.510 Locating Boundary Lines

Boundary lines shall be marked by installing steel or aluminum posts and shall be located by survey methods that ensure the posts are placed within ± 1 foot of the theoretical straight line between corners that define the ends of the property line. Posts shall be placed on this line as located. This specification shall not be interpreted as allowing posts or line monuments to be placed off the calculated line between property corners.

.520 Marking the Property Line

Property lines are marked by placing line posts, line monuments, painted blazes on trees, and clearing. The Task order will specify one of the following levels of intensity per mile or per the whole task order. Markings on original Government Survey trees (corner, witness, line, etc.) shall not be destroyed.

1. **Intensity Level 1:** 100 percent of the boundary will be marked per this section. Any deviations from this requirement must be approved by the COR or shall be addressed in Task Order Scope of Work if changes are requested by the Government regarding blazing and painting of trees.
2. **Intensity Level 2:** Only the property line within 50 feet either side of a boundary sign and on Forest lands within 3 feet of the property line shall be marked per this section. Any deviations from this requirement must be approved by the COR or shall be addressed in Task Order Scope of Work if changes are requested by the Government regarding blazing and painting of trees.
3. **Intensity Level 3:** Open areas and Grasslands, no blazing or marking required.

.521 Placing objects to mark the property line

Posts, line monuments and line blazes shall be placed only on the true property line located to the standard specified above. Posts shall be set as per [Exhibit .521](#), without deforming or degrading the usefulness of the post.

.522 Blazes

Blaze shall be made in accordance with [Exhibit .522](#). All trees 6 inches d.b.h. or larger and within 3 feet of boundary lines shall be marked with the appropriate blaze. Existing blazes found in the correct location and healed over shall not be reblazed. Blazes shall be cut through the cambium layer. Blazing on the adjoiner's side of the line shall not be performed if the adjoiner denies permission to mark their side of the line.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.523 Clearing

Within 3 feet of each side of the boundary line (given permission by adjoining landowner), the Contractor shall clear line sufficient to maintain intervisibility of posts and remove trees less than 6 inches d.b.h., and all limbs up to 7 feet above the ground. The resulting debris from the clearing shall be lopped to settle to within 1 foot of the ground. All limbs shall be cut off the stumps of felled trees to prevent regrowth. Stump height shall not exceed 6 inches. Criss-crossing of stems shall be avoided and cut trees shall not be left leaning against or hanging in standing trees unless otherwise directed by the COR. Vegetative debris shall be scattered to reduce concentrations, deposited offline, and left on the Government side whenever possible. Debris shall not be deposited within 5 feet of boundary lines, roads, trails, stream courses or fire breaks.

Exceptions to this clearing standard in certain areas of heavy chaparral or close proximity to occupied dwellings may be approved at the discretion of the CO/COR. Any equitable adjustments in unit price for reduced clearing will be negotiated with the Contracting Officer.

.524 Painting

All blazes applied under [.522 Blazes](#) shall be painted red in accordance with [Exhibit .522](#). Paint shall be a durable, oil based, red enamel. Paint placed by the Contractor in an improper location shall be corrected, at the Contractor's expense, by painting over with durable, oil based, black or brown colored enamel paint.

.530 Posting the Property Line

Posting is the act of placing signs and posts along the property line, so it is recognizable. Placement of signs along the boundary line shall be in accordance with [Exhibit .521](#). Posts will be placed at intervals not to exceed 200 feet, or shorter to remain inter-visible if brush and trees were removed, (signs on line trees do not satisfy the interval spacing, only sign posts). Some task orders may adjust this distance depending on vegetation and the priority of the project. Some of the signs that are available are shown in [Exhibit .424](#). Other signs may be specified for special projects.

.531 Post and Sign Placement

Placement of posts along the boundary line shall be in accordance with [Exhibit .521](#) and [Exhibit .522](#).

When choosing post locations, consideration shall be given to the visibility of the post and sign from off line, e.g., a post shall not be set immediately next to and facing a tree that will block its visibility and shall be moved along the true line until it is in a position from which it can be seen when standing off line. Posts shall also be placed at ridge, stream, road, and trail crossings. Pink flagging shall be attached to the top of all sign posts. "Property Boundary" signs or stickers shall face out/away from Government lands, shall be aligned parallel with the boundary line.

The first sign post along the property boundary (referred to as a guard post) shall be explicitly on the boundary line and placed ± 5 feet from the corner and have a "Land Survey Monument" sign or sticker, or equivalent Government sign substituted by the COR, attached. The second post on line out of the corner shall be placed 50 to 75 feet from and be visible from the corner, then normal sign pacing should continue per [.530 Posting the Property Line](#) and [Exhibit .521](#).

Posts shall be driven in the ground a minimum of 18" and be securely planted (with no side-to-side play and difficult to remove). If this cannot be achieved a rock mound shall be built around the post to 24", or higher, until secure. Rock (and not wood or other organic material) is the only material that maybe used to provide supplementary support to posts that are not securely planted after being driven to refusal. The width of rock mounds shall be twice their height.

All signs and posts placed in improper location shall be removed or relocated at the Contractor's expense.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.532 Property Boundary Sign, 54-2 or 54-7; Decal P54-1 or P54-2

Property Boundary Decals or signs shall be placed on line posts or trees on the boundary line. Posts shall be placed at a maximum of 200 ft. from each other. Posts or signs on trees shall be placed at ridge, stream, road, and trail crossings intervisible from each other. Where trails and roads are intersected, posts shall be placed on both sides of the road/trail, no less than 10 feet from each side of the traveled way and no more than 25 feet on one side and 50 feet on the opposite side.

See Special Project Specification for spacing and visibility requirements between signs. These signs shall not be placed on private trees.

.533 Location Poster Sign 54-5, 54-6, or 54-8

*Location posters are not required per this contract, but it may be requested for specific task orders. If so, the following shall apply:

The location posters shall be placed where all marked boundary lines cross roads and trails. Sign 54-5 is for section and township lines. Sign 54-6 is for section subdivisional lines. Sign 54-8 is for metes and bounds survey lines. These signs may be placed on either posts or trees. The Contractor shall stamp or etch the required information on the sign. Some additional special posts at road crossings may be required. When required, they shall be shown on Exhibit 3 and included in the Special Project Specifications.

.534 Sign Attachment

The Contractor shall firmly attach signs and/or stickers to posts and appropriate line trees in accordance with [Exhibit .521](#), [Exhibit .522](#), and Special Project Specifications. If a fence consisting of wire and steel fence posts is within 1 ft. of line - with the landowner's permission - signs shall be attached to the top wires with hog rings at the four corners of the sign and placed next to the steel fence post. If a fence consists of wood fence posts and wire, the sign shall be wrapped around the fence post and nailed to the post at all four corners of the sign with galvanized nails. See Special Project Specification for spacing and visibility requirements between signs.

.540 Obliteration of Erroneous Lines

After some land acquisitions or disposals, the government may order the obliteration of these now erroneously posted lines. Government signs and posts previously placed which are no longer within one foot of a boundary line shall be removed from the site by the Contractor and shall be delivered to the Government. Old paint on the Government side of erroneous boundary lines shall be painted over with black or dark brown enamel, oil-based paint.

The Contractor shall notify the CO/COR upon the discovery of Government signs and posts previously placed which are not on the boundary line. Separate task orders will be issued for the removal of posts and signs as required. When deemed by the CO/COR, the Contractor shall remove these signs and/or sign posts. They shall remain the property of the Forest Service.

.600 PLATS

The Contractor shall prepare a plat(s) as ordered in a task order which meets the State law and county requirements similar to that illustrated by [Exhibit .600](#). Prior to filing of the plat, the computations may be requested for review.

The Government's acceptance of the plat does not release the Contractor of any liabilities through errors or omissions.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.610 Content

All appropriate information contained in the Cadastral Plat Check List (see [Exhibit .600](#)) shall be included on the plat.

.620 Review

Prior to filing, all items on the plat checklist contained in [Exhibit .620](#) shall be reviewed and initialed by the Contractor and submitted with one paper copy of the plat to the COR for review and approval.

.630 Geodetic Position

Plats for cadastral projects shall show a geodetic position on a minimum of one corner, depending on extent of project. Plats for projects with an extent greater than 1.5 miles shall indicate the geodetic position on a minimum of two corners. A statement shall be placed on the plat as to the method used to determine the position, the datum and the date established. See [.321 Global Navigation Satellite System \(GNSS\)](#) for accuracy standards. Geodetic positions shall be provided on the Control Diagram if a plat is not prepared.

.640 Filing or Recording of Plats

The final plat(s) shall be submitted to the COR for review prior to filing or submitting to the local review authorities. After the required reviews, approvals and signatures, the Contractor shall be instructed to file the plat(s) and furnish the required copies to the Forest Service as follows:

1. **Recorded copies:** The Contractor shall file or record the survey plat(s) in the appropriate jurisdiction in accordance with the State and Local Statutes. Filing fees and any other costs involved shall be borne by the Contractor. After acceptance and recordation, a digital copy of the recorded document shall be furnished to the Government in the format provided by the county.
2. **Forest Service copies:** If requested in the task order, a reproducible copy of the final plat, consisting of a permanent image on a stable base polyester (mylar), with proof of filing, shall be furnished to the Forest Service.

.650 Digital Copy of Plat

A digital copy of the prepared Plat shall be given to the Forest Service. This shall be in AutoCAD .DWG format and submitted in a media as requested by the COR.

TECHNICAL SPECIFICATIONS – MAINTENANCE

Maintenance is the act of bringing previously surveyed, marked & posted boundary lines and corner monumentation of various conditions back to current standards. This infrastructure can degrade over time from environmental and human factors among others. While it is not required, use of full GNSS survey systems can expedite the maintenance process. The following [.700 CORNER MAINTENANCE](#) and/or [.800 BOUNDARY LINE MAINTENANCE](#) operations shall be performed at each corner or line indicated .

For projects of maintenance only, adjoining land owners shall be notified, see [.120 Adjoiner Notification](#). Refer to [Exhibits .120](#) for example notification letter.

.700 CORNER MAINTENANCE

The Contractor shall perform the following work at the previously monumented corners identified on exhibit 3 of the task order. Original markings on trees (corner, bearing, witness, line, etc.) shall not be destroyed. Refer to [.400 Corner Monumentation, Perpetuation, and Accessories](#).

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.710 Monument Maintenance

.711 Brushing

Brush and debris within a 6-foot radius of the corner shall be cleared away. Care shall be exercised to avoid destroying the original monument or accessory evidence during this operation.

.712 Existing monuments

The Contractor shall ensure that the corner monument is firmly and securely set in place in the ground. Loosely set or badly tilted monuments shall be reset. Scattered mounds shall be rebuilt and corners without mounds and with rock available within a radius of 100 feet shall require that a mound be constructed similar to that illustrated in [Exhibit .411](#). Painting and signing shall be performed on corner trees, as needed, to bring them into compliance with the standards shown on [Exhibit .414](#).

.713 Resetting monuments

The Contractor shall notify the COR of any damaged, missing, or out of place monuments. After notification the COR may, at their discretion and with the approval of the CO, direct the Contractor to re-set the monument either by Control Survey or from BTs. In such cases an equitable adjustment of contract time and/or price will be authorized by the CO for the additional work needed to re-set the monument.

.720 Bearing Trees and Accessories Maintenance

A search for each BT and/or accessory of record shall be performed by the Contractor and shall be maintained as follows:

.721 Visibility, Painting, and Signing

A search for each BT and/or accessory of record shall be performed by the Contractor. All evidence found shall be made visible from the corner, painted, and signed in accordance with [.423 Blazing, Scribing and Painting](#) and [.424 Signing](#).

Signs previously nailed into trees that have little or no nail shaft showing should have a set of new nails placed near the original nail holes protruding as much as possible while firmly within the firm sapwood layer of the tree to prevent the sign from popping of the current nail heads in the near future (the signs are pushed out with the trees outer rings growth while the nails remain fixed). If the sign is already puckered in around the nail head, the sign will be popped off and either reattached if it is clean and legible or replaced as needed.

.722 Establishment of New Accessories

The Contractor shall establish new BTs or objects in accordance with [.420 Bearing Trees and Other Accessories](#) to replace dead, damaged, dying, or missing BTs or bearing objects and for the number and location (quadrant placement) of healthy BTs required at a corner. All new BTs shall be visible from the corner.

.730 Selection, Measurements, Blazing, Painting, Scribing and Signing

Refer to [.420 Bearing Trees and Other Accessories](#).

.740 Corner Recordation

Refer to [.430 Corner Recordation](#).

If a corner record or FS corner card is not ordered for maintained monuments, then field notes for each corner maintained shall be recorded in the format specified in [.330 Field Notes](#) and be submitted to the COR when requested. Field notes shall contain, at a minimum:

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

1. Description of the monument found and any other evidence of the corner point.
2. Sketch or picture clearly showing the markings on the monument cap.
3. Description of all BTs, BT remains, and other accessories found, including d.b.h.
4. Description of all new BTs and/or accessories established, including d.b.h.
5. Bearings and distances measured from the corner to all existing and new BTs, BT remains, and other accessories. The basis of bearing and declination used for such measurements shall be noted.
6. Date work was performed, and equipment used to perform measurements, such as hand compass, EDM, steel tape, total station, staff compass, GNSS offset, etc.
7. Description of any other work done to maintain and preserve the corner monument and/or point.

.750 Corner Coordinates

The contractor shall provide resource grade coordinates for all corners maintained at a minimum.

.800 BOUNDARY LINE MAINTENANCE

.810 Scope of Boundary Maintenance

The Contractor shall perform all work necessary to bring the property lines identified for maintenance on Exhibit 3 into compliance with the specifications in this section. The boundary line should be obvious from previous marking and posting. If the line is not obvious, the Contractor should immediately notify the COR. Original markings on line trees (corner, witness, line, etc.) shall not be destroyed. Work on adjoining lands shall only be done if granted previous permission on the private side of the boundary.

Boundary Maintenance Levels:

1. **Level 1 - Difficult:** 0 - 75% of previous posting is in place or original position is evident, or previous posting may have been moved and survey equipment is required to maintain. Extensive brushing of line needed. See [.860 Boundary Line Resurvey](#).
2. **Level 2 - Normal:** 75 - 95% of previous posting and blazing is in place or original position is evident and no gaps between existing post greater than 600 feet (see [.850 Gaps in Sign Posting](#)), with moderate brushing of line needed.
3. **Level 3 - Easy:** 95% or more of previous posting and blazing is in place with minimal brushing of line needed.

.811 Clearing

Lines shall be cleared in accordance with [.523 Clearing](#).

.812 Blazes

Blazes shall be added to new trees to bring the line into compliance with [Exhibit .522](#) and the spacing requirements of [.522 Blazes](#). Previously blazed trees shall be preserved and not be re-blazed if the old marks are readily discernable. New blazes shall be added only where old marks are not readily discernable. Blazing on the adjoiner's side of the line shall not be performed if the adjoiner denies permission to mark their side of the line.

.813 Painting

Painting shall be in accordance with [.524 Painting](#). Existing paint (not applied under this contract) found in the correct location shall be repainted after all the loose material is scraped away (can use the bottom of paint can to scrape the loose material away prior to painting). Existing paint on Government land and all paint known to have been placed by Government procured surveys (on either Government or adjoining lands) found out of compliance with [.524 Painting](#) and [Exhibit .522](#) shall be covered with black paint by the Contractor.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.820 Boundary Posts and Signs

Maintenance of previously posted lines includes rehabilitating the posts, so they are plumb and firmly set and replacing property boundary signs which have become unreadable, unsightly, or otherwise unserviceable. All unserviceable boundary marking materials (except deteriorating fiberglass) shall be removed from the project area and returned to the COR.

Signs to be used are shown in [Exhibit .423](#). All existing sign posts maintained, and new sign posts added shall comply with [.530 Posting the Property Line](#) and [Exhibit .522](#), including guard posts. Pink flagging shall be attached to the top of all sign posts, existing or new, located on the boundary line.

.821 Existing Sign Posts:

Existing sign posts found along the line shall be evaluated to determine whether they are within 1 foot of the boundary line, in accordance with [.531 Post and Sign Placement](#). If so, they shall be straightened, driven, and/or firmed up. When sign posts are found disturbed or displaced, but otherwise undamaged, the Contractor shall re- drive the post within 1 foot of the boundary line.

Older boundary line sign posts may have been set under less restrictive positional standards, such as the sign posts only being required to be within 1 foot of the boundary line, or the maximum spacing being no more than 300 feet. The COR shall notify the Contractor of lines suspected to have been signed and posted under less restrictive standards. The Contractor may, at the discretion of the government, be requested to maintain these lines in accordance with [TECHNICAL SPECIFICATIONS - MAINTENANCE](#), or to re-survey and re-post these lines in accordance with [.860 Boundary Line Resurvey](#). An equitable adjustment of contract performance time or price may be made for any addition or deletion of survey work authorized by the CO resulting from boundary lines being previously posted under less restrictive standards.

.822 New Sign Posts:

When their original position can be determined, sign posts that are in damaged or deteriorated condition shall be replaced by a new sign post. When the original position of sign posts that are in damaged or deteriorated condition cannot be determined a new sign post shall be driven in accordance with [.531 Post and Sign Placement](#). Damaged and deteriorated signs and sign posts shall remain the property of the Government and shall be returned to the COR, unless the COR directs otherwise.

If the sign posts found in place are not durable in nature such as deteriorating fiberglass or substandard flimsy posts; a new sign post shall be placed on-line near the old post. Deteriorating fiberglass is not expected to be removed. If T-Bar posts are found, it is acceptable to attach/reattach property boundary signs using steel wire.

.823 Sign Attachment:

The Contractor shall ensure that existing signs on sign posts are securely attached and in good readable condition. Signs that are damaged or deteriorated shall be replaced with the appropriate sign. The Contractor shall firmly attach signs to sign posts with corrosion resistant bolts and nuts, aluminum rivets, or corrosion resistant wire as directed by the COR.

Boundary Signs previously nailed into trees that have little or no nail shaft showing should have a set of new nails placed near the original nail holes protruding as much as possible while firmly within the firm sapwood layer of the tree to prevent the sign from popping of the current nail heads in the near future (the signs are pushed out with the trees growth while the nails remain fixed). If the sign is already puckered in around the nail head, the sign will be popped off and reattached if it is clean and legible or replaced as needed.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

.830 Erroneously Located Sign Posts

The Contractor shall notify the COR of any existing sign posts previously placed by survey found to be more than 1 foot off the boundary line, report the distance they are off-line, and provide an opinion as to the likely cause, such as innocent error, moved by landowner, trespass in vicinity, et cetera. The COR will specify what corrective actions the Contractor shall take in any such cases. In the absence of direction from the COR the Contractor shall move the sign posts to the boundary line and drive them in the ground in accordance with [C-.531 Post and Sign Placement](#).

Said sign posts which may have encouraged either encroachment or prohibited activities within a wilderness area shall be reported to the COR as per [.130 Conflicts, Boundary and Title Disputes](#).

Refer to [.540 Obliteration of Erroneous Lines](#) for signs not known to be previously placed by survey.

.840 Encroachments

All encroachments/trespasses found or suspected shall be described, diagramed, and photographed. The approximate location shall be reported in latitude and longitude using decimal degrees (NAD 83) to an accuracy of 5 decimal places.

.850 Gaps in Sign Posting

Where there is a gap of 200 to 600 feet between existing sign posts which are found to be within 1 foot of the boundary line the Contractor shall clear, blaze, paint, and place posts in the gap until the line is brought into compliance with [.530 Posting the Property Line](#) and [Exhibit .522](#). The placement of any sign posts which requires the measurement of angles, distances, or positions, shall be performed by or under the direct supervision of a licensed land surveyor.

The Contractor shall not blaze or place posts in gaps greater than 600 feet and shall notify the COR of the gap(s) as soon as is practical. After notification the Contractor may, at the discretion of the Government, be requested to re-survey and re-post the boundary line in the gap(s). Re-survey and re-posting shall be performed in accordance with [.860 Boundary Line Resurvey](#). In such cases an equitable adjustment of contract time and/or price will be made for the addition of the survey work authorized by the CO.

.860 Boundary Line Resurvey

The Contractor shall perform work on all lines identified for boundary line re-survey on Exhibit 3 in accordance with [.300 Control survey, field data collection and computations](#) and [.500 Boundary Line Marking and Posting](#). The work shall be performed by or under the direct supervision of a licensed land surveyor.

Boundary lines are to be re-surveyed from monument to monument, unless directed otherwise by the COR. When required by state or local statutes, or by the COR, the Contractor shall prepare and file a plat for the lines resurveyed in accordance with [.600 Plats](#).

.900 MISCELLANEOUS SERVICE

.910 Surveyor's Report

The Contractor shall furnish the Forest Service a Surveyor's Report similar to that shown in [Exhibit .910](#). The report shall contain any information the Contractor considers pertinent to the project. It is not necessary to repeat the detailed information contained in other records created and filed as part of this contract. At a minimum, the report shall contain the following:

1. The information contained on [Exhibit .910](#).

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

2. Results of search for all corners.
3. Visible signs of encroachment or trespass.
4. Statements relevant to the project made by adjoining landowners or other interested parties.

.920 Encroachment Diagram

An encroachment/trespass is any apparent structures, significant improvements, or unauthorized occupancy on National Forest System Lands. An encroachment diagram is required in pertinent areas to show in greater detail the difference between lines of occupation and lines of title. All features that indicate occupation where it conflicts with title shall be shown with a stationing scheme, leaders or bearing and distance along the boundary showing posts set and the location of potential conflicts, encroachments, trespass, or unauthorized use in relation to the nearest survey corners as shown on [Exhibit .130](#).

Additionally, the approximate location of the encroachments shall be reported in latitude and longitude using degrees, minutes, seconds (NAD 83) to an accuracy of one hundredth of a second. Photos will be provided to the COR as per [.930 Photos](#).

.930 Photos

The Contractor shall take digital photos of all new monuments and accessories, potential conflicts, encroachments/trespasses, and any other items of interest the Contractor deems necessary. The photos shall be cataloged or named in a manner where the location or reason for the photo can be readily known, and shall be supplied to the COR by agreed upon media (i.e. CD, flash drive, internet drive, email).

The COR may request the Contractor to furnish digital pictures of any conflict as described in section [.130 Conflicts, Boundary and Title Disputes](#) and all physical evidence found at corners and their accessories identified on Exhibits 2 and 3. An object of recognizable scale will be in pictures when identifying size of an object is of primary concern.

.940 Project Documentation

All relevant data to this survey will be furnished to the Forest Service in a digital format (USB drive or internet based shared folder) that includes Corner Recordations, Certificate of Surveys, Digital Photographs of Corner Remonumentation, Survey Reports, Calculations, Control Diagram, Final Latitude and Longitude for all corners tied and set in the survey.

.950 Quality Control, Inspection & Acceptance

.951 Quality Control

The Contractor has sole responsibility for maintaining quality control for all aspects of work performed under this contract. The Contractor will furnish a written plan of self-inspection procedures to the COR on request. The COR or designated inspector will inspect the work for compliance to answer a yes/no question as to if the work is within the contracted specifications, not to serve as quality control.

.952 Inspections

The COR or a designated Inspector will make periodic inspections of each project as work progresses. The contractor shall give the COR ample time to schedule inspections for compliance prior to submitting any invoices.

.953 Acceptance

No final approval of any project will be granted until all items specified are delivered to the COR and determined to fulfill all specifications, terms, and conditions of this contract. Acceptance is required prior to payments; the contractor will confirm acceptance from the CO/COR prior to submitting invoices. During

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

larger or long-term contracts, intermediary portions of acceptance might be requested for payment purposes, the amount of the portion will be agreed upon with the CO/COR.

All other surveys provided by the Contractor shall be in accordance with applicable State Minimum Standards of Practice providing they are not less than requirements set forth in these specifications or subsequent Supplemental Specifications and exhibits.

.960 Other Surveys

Engineering surveys include, but are not limited to, the following; Topographic surveys, Right of Way surveys, photogrammetric control surveys, bathymetric surveys, etc. Supplemental Specifications will be issued for these and other surveys as necessary.

.961 Topographic Surveys

1. ***Survey Limits:*** Survey limits will be furnished to the Contractor on previous map or sketch of project site, and/or flagged on the ground by the Government.
 - a. Prior to actual field work, the contractor will consult with the COR to determine the scope and details of the project. This will ensure that the final product conforms to the expectations of the COR.
2. ***Survey Control:*** A Primary Control point is selected in or near the project area. This point's absolute location shall be determined to within 0.25 feet horizontal and 0.50 feet vertical precision at the 95% confidence level, by OPUS or other suitable means.
 - a. COR may waive requirement for Primary Control for Topographic Surveys. In this case Contractor will assign "assumed" coordinate values at the initial minor control point. Coordinates shall be selected which allow the entire project to be mapped without entering negative coordinate values. Elevation assigned should not approximate mean sea level as on a USGS topographic map.
 - b. Minor control points shall be established inter-visibly as needed to accomplish the Total Station survey. If the topographic survey may be accomplished completely by GPS, Contractor shall nevertheless set sufficient control points to allow future construction contractor's surveyor to place the design on the ground. At a minimum, this requires 2 inter-visible points for a small site, or 2 sets of 2 inter-visible points (2 Azimuth pairs) at opposite ends of a more linear project. True ground distances shall be measured such that resulting mapping may be generated at a project scale of 1.0 exactly.
 - c. Control points shall be set with a durable marker, such as rebar with a metal cap, or large nail with a reference point washer, detectable with a magnetic locator. The marker cap or washer should be stamped with a unique identifier which is the point name or number, such as "CP 1".
3. ***Features to Survey:***
 - a. Sufficient topo points to generate a topographic map of the project at a contour interval of 1 foot. or another interval as specified by the COR.
 - b. Generally, all artificial features should be located with basic description including, but not limited to:
 - i. Roads and trails, along with pavement type. Unimproved trails to be located along centerline only and provide typical width.
 - ii. Buildings or other structures, including toilets and sheds; main footprint and type, e.g. toilet, picnic shelter, etc.
 - iii. Bridges with width and type of construction.
 - iv. Culverts and other drainage or irrigation structures with size and type, e.g. 12"CMP, concrete weir, etc.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

- v. Water utility features, e.g. well, hand pump, water valve, etc.
 - vi. All utility poles, markers, fixtures; state overhead or buried and type of utility if known or evident e.g. electric, telephone, gas, etc.
 - vii. Concrete or paved pads of any sort; state purpose, e.g. dumpster pad.
 - viii. Recreational use features such as picnic tables, tent pads, playground fixtures.
 - ix. Fences, including type of construction.
 - x. Signs, including traffic, interpretive and bulletin boards. Multiple panel signs require several shots. Note traffic sign wording. Can be presented on map in tabular form.
- c. Individual trees in campgrounds are generally not located; check with COR. Where site is partly trees and partly open, collect tree lines as a feature string and note types.
 - d. Natural features including rock outcrops, large boulders, streams and ponds, marshes, and within recreation or residential sites, areas of standing water or poor drainage.
 - e. Nearest utility: where site is not currently served by a utility but a nearby connection or marker is visible from site control, such feature shall be located and described, but need not be included within the limits of the contours or terrain model. Features which fall outside map sheet extents may be described by coordinates or bearing & distance.

4. Break Lines and Feature Strings:

- a. Break Lines are lines where the ground surface deflects, or changes grade, and are variously referred to as topo breaks or fault lines. Examples of Break Lines are the toe of a slope, the top of river bank, and the flow line of a gutter.
- b. Feature Strings are lines which define or bound a physical feature or object and are also referred to as polylines or figures. These planimetric features are lines that should be drawn on the topographic map, usually manmade features, but could also be the edge of a water body. Examples of Feature Strings are edge of pavement, dirt trail, fence line, building line.
- c. All Break Lines and Feature Strings encountered in the survey shall be collected in such manner, and delivered electronically to the Government such that Government designers can incorporate these lines in their design software. That generally requires that survey points defining such lines be collected sequentially but point descriptor codes or field book line commands may also be employed.

5. Topographic Map Deliverables:

- a. 3 paper copies of the map, in color, shall be provided.
- b. The map shall also be furnished in .DWG file format. This file shall be provided on USB drive or other means specified by the COR.
- c. Map features should be separated into thematic layers generally based on surface materials or function with simple common language names such as "contours", "break lines", "trees", "concrete", "utilities", etc.
- d. Specific CAD standards are not required by the Government, but final product map colors and symbology should generally mimic USGS topo maps.
- e. A table of Control points with coordinates and descriptions shall appear on the map, and also be supplied digitally in text format, including a line of column or field headings.

.962 Right of Way Surveys

Rights-of-Way surveys shall be surveyed along existing or proposed centerlines, and shall be platted and described in terms of tangent bearings, distances, deflections, and/or simple curves parallel to the surveyed line, and shall not be monumented unless otherwise directed by the CO. All Rights of Way surveys shall be tied to the appropriate property corners of the subject properties.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

1. The surveyed centerline shall not exceed 3 feet in any location from the actual centerline location of the existing road or trail or the flagged proposed road or trail location.
2. A separate plat or exhibit shall show the Right-Of-Way (ROW) survey. The plat shall give the total ROW area, pertinent curve data and the other measurements, ties to controlling PLSS, Mineral Survey, HES, or other corners, and conform to existing applicable State Statutes. The width of the ROW shall be supplied by the task order or COR. See [EXHIBIT .962](#) for ROW survey checklist.
3. Any encroachments found within the ROW shall be noted on the ROW plat or exhibit.
4. A Legal Description shall be prepared in the form of metes-and-bounds centerline strip description or other form approved by the COR. The description will include ties from the Beginning and End points to nearby PLSS corners or other appropriate corners.
5. Any deviations from this requirement must be approved by the COR or shall be addressed in the Task Order Scope of Work if changes are requested by the Government. GPS technology may be used as determined by the COR.

.963 Photogrammetric Control Surveys

1. ***Survey Types and Definitions:*** Surveys fall into one of two stages; the aerial photography, and the ground control survey. The sequence will vary due to seasonal constraints, and the schedule constraints of both the aerial and ground survey providers. The actual scope of the project may vary and shall be determined by the COR.
 - a. Prior to actual field work, the contractor will consult with the COR to determine the scope and details of the project. This will ensure that the final product conforms to the expectations of the COR.
2. ***Control Survey:***
 - a. A Primary Control point is selected in or near the project area. This is typically used as a GPS base point for RTK or Fast-Static survey and may or may not be one of the required photo control points. This point's absolute location shall be determined to within 0.25 feet horizontal and 0.50 feet vertical precision at the 95% confidence level, by OPUS or other suitable means.
 - b. Panels or photo "id points shall be located relative to said Primary Control to within 0.2 feet horizontal and 0.3 feet vertical precision at the 95% confidence level. True ground distances shall be measured such that resulting mapping may be generated at a project scale factor of 1.0 exactly.
3. ***Required Locations:*** The COR will provide Contractor with a map of required control point locations and required target size. If panels are placed by the Government, recreation-grade GPS coordinates will be provided to facilitate finding the panels. Contractor has some latitude, typically up to 200' depending on photo scale, as to actual panel location as long as the panel falls within the photo limits. The contractor shall select such location so as to allow panel to lie as flat as possible, be clearly visible from the sky and clear of overhanging trees and their shadows. For photo-id projects, prints of the actual project photography will also be provided.
4. ***Physical Requirements:***
 - a. Contractor shall supply all panel materials.
 - b. Panel leg width and overall size will be provided by COR.
 - c. Panels are constructed of white PVC or other plastic roll stock with nylon mesh reinforcement or similar material, or commercially constructed targets with corner grommets may be used if of required size.
 - d. Strip panels shall be set in the ground with nails or other device sufficient in size and quantity that the panel lies flat and may reasonably be expected to stay in place until the photo flight is made.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

- e. At the center of each panel shall be set a durable marker, such as rebar with a metal cap, driven flush with the panel surface, except where ground conditions do not allow such marker.
- f. The marker cap or washer should be stamped with a unique identifier which is the point name or number, such as "CPI".
- g. Contractor shall note any variation between the panel elevation and the control point monument in excess of 0.1 feet; also note any significant elevation disparity across the panel.

5. ***Removal of Panels:*** Generally, panels are not removed following the photo flight. If panels need be removed from private land or for other reasons, said removal may be accomplished by the government, or paid as a separate item.

.970 Special Designated Area Boundary Surveys

The survey, monumentation and posting of Special Designated Areas such as Wilderness, Wild and Scenic Rivers, Research Natural Areas, etc., their Boundaries shall be conducted using technical specifications that, in part, depend on the vicinity to adjacent property rights, topography, and calls in the legal description. In addition, the following shall apply:

.971 Vertical positioning

The method used to establish corners or boundary lines at or along a specified elevation contour shall be determined by the Contractor and shall meet the criteria of plus or minus 3 feet (unless otherwise directed by the COR) from elevation called for in the legal description. Additional specifications may be directed by the task order, especially in areas of flat topography.

.972 Monument Caps

Monument caps and tablets shall be stamped as directed by the COR. Each wilderness boundary cap shall be stamped with the CDA wilderness name, angle point number, date established and the PLS number of the surveyor establishing said monument. Monuments shall be placed at the locations shown on Exhibit 3.

.973 Signing

Signs to be used are shown in [Exhibit .424](#). The appropriate sign designating the area (e.g. "National Forest Wilderness") shall be attached to trees or posts (as directed by the COR) set within 5 feet of the true Wilderness Boundary location. Signs shall be placed at ridge, draw, road, and trail crossings. Signs shall be spaced a maximum of 200 feet apart (or as directed by the COR) and placed to be inter-visible if brush and trees were removed.

SECTION J - EXHIBITS

J-2 TABLE OF EXHIBITS FOR CADASTRAL SURVEYS

***EXHIBITS TO BE CONTAINED IN THE TASK ORDER PACKAGE**

EXHIBIT 1	*VICINITY MAP
EXHIBIT 2	*CORNER AND OWNERSHIP STATUS
EXHIBIT 3	*WORK TO BE ACCOMPLISHED

EXHIBITS CONTAINED IN THIS DOCUMENT

<u>EXHIBIT .120</u>	<u>EXAMPLE LETTER TO ADJOINERS & REPLY CARD</u>
<u>EXHIBIT .130</u>	<u>EXAMPLE CONFLICT REPORT</u>
<u>EXHIBIT .220</u>	<u>EXAMPLE CORNER CARD (FORM 7100-52)</u>
<u>EXHIBIT .411</u>	<u>PLACEMENT OF CORNER MONUMENTS</u>
<u>EXHIBIT .412</u>	<u>PLACEMENT OF REFERENCE MONUMENTS & WITNESS CORNERS</u>
<u>EXHIBIT .413</u>	<u>TYPICAL STAMPING OF MONUMENTS METES AND BOUNDS</u>
<u>EXHIBIT .414</u>	<u>CORNER TREES</u>
<u>EXHIBIT .423</u>	<u>BEARING TREES</u>
<u>EXHIBIT .424</u>	<u>SIGNS</u>
<u>EXHIBIT .430</u>	<u>EXAMPLE MONTANA, IDAHO, & NORTH DAKOTA CORNER FORMS</u>
<u>EXHIBIT .521</u>	<u>SIGN PLACEMENT</u>
<u>EXHIBIT .522</u>	<u>MARKING AND POSTING THE BOUNDARY LINE</u>
<u>EXHIBIT .600</u>	<u>EXAMPLE PLAT</u>
<u>EXHIBIT .620</u>	<u>CADASTRAL PLAT CHECKLIST</u>
<u>EXHIBIT .910</u>	<u>EXAMPLE SURVEYOR'S REPORT</u>
<u>EXHIBIT .962</u>	<u>RIGHT OF WAY SURVEY CHECKLIST</u>

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .120 - EXAMPLE LETTER TO ADJOINERS & REPLY CARD

Example of Letter to Adjoiners, page 1 of 2

(Date)

(Landowner)

1234 XXXXXX Road

City, State Zip

RE: XXXX Land Survey Project

Township XX South, Range XX East, W. M., Section XX, Tax Lot XXXXXXXXXXXX

Dear (Landowner):

Over the next year(?), the USDA Forest Service will be conducting boundary survey work in the area adjoining your property. We expect this work to begin by (date).

Our firm has been contracted by the USDA Forest Service to retrace the boundary lines of the XXXX National Forest in the area adjoining your property. We will be working in this area during the month of (MONTH).

If you have any information concerning the boundary line that you would like us to be aware of, or any desires you wish to express please contact our firm to arrange a date and time for a meeting.

Surveying and marking National Forest boundaries include the following standards:

- ... Clear underbrush 3 feet on either side of the line,
- ... Blazes on trees within 3 feet of the line.
- ... Boundary line signs within 1 foot of the line.
- ... Set new Forest Service monuments and mark new bearing trees where applicable.

We ask your permission to perform this work on your side of the boundary line. Please fill out the enclosed card, either granting or denying us permission to mark your side of the boundary line, and return the card to our office in the enclosed addressed envelope.

Thank you in advance for your cooperation.

Sincerely,

XXXXXX

/s/ XXXXXXXXX, PLS

Land Surveyor/s/

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .130 - EXAMPLE CONFLICT REPORT

Sample Surveys, Inc.

Registered Land Surveyors


Identification of Possible Conflict

Contract Number: 53-67T0-6-05 Date Discovered: 11/11/2003
Location: Vicinity of Corner 3 of H.E.S. 612, Section 14 T5S, R45E PMM

Name\Location of Adjoining Landowner: C.D. Green
320 Ryan Road
Ashland, MT 12345

Nature of Conflict: Structures located on National Forest Land.

Remarks: _____

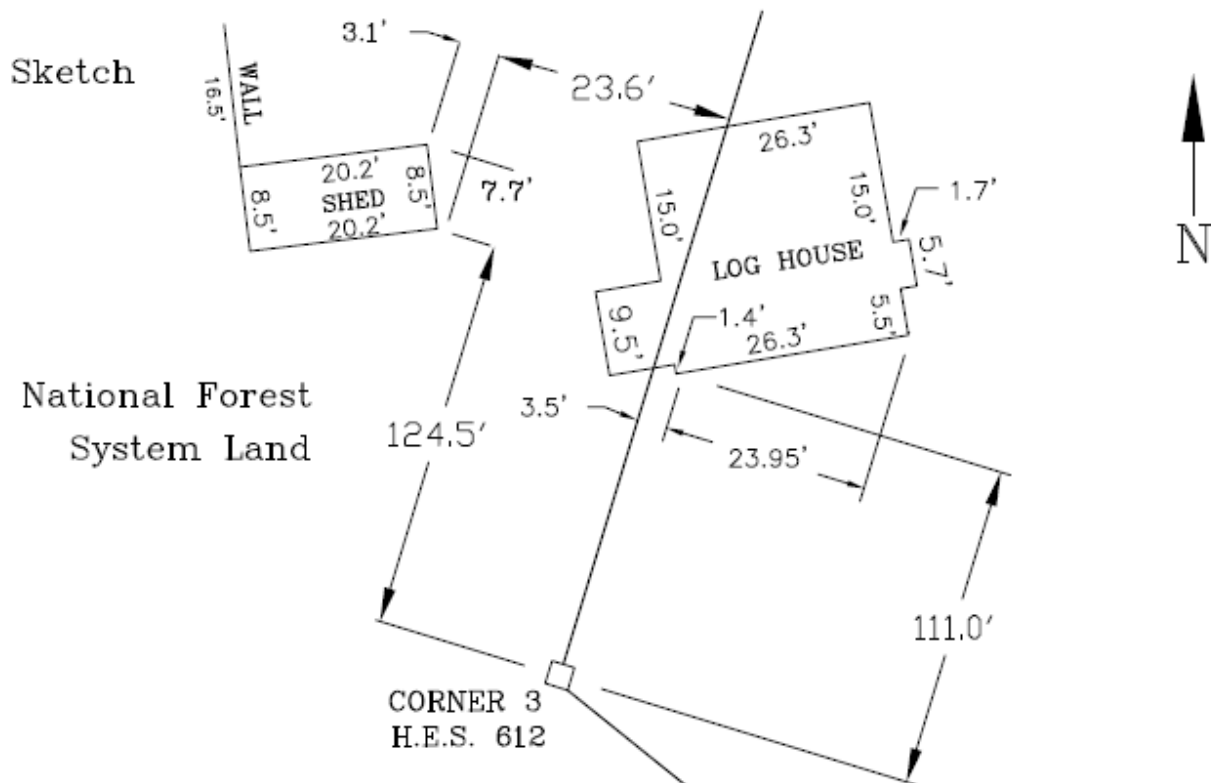

Submitted By: _____

Date: _____

Received By: _____


Date: _____

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .220 - EXAMPLE FS CORNER CARD (Form 7100-52)

Front - FS Corner Card, page 1 of 2

FRONT

USDA-FOREST SERVICE		CORNER RECORD (SEARCH) (Ref. FSM 7151.4)		Tract or Survey No. _____	Cor. No. <u>1</u> ①
Index File No. <u>C-18</u> (sections only)	T. <u>0S</u> <u>0E</u> R. _____	R.D. <u>PACTOLA</u>	County <u>PENNINGTON</u>	ALSO CW 1/16 SECTION 2	
Meridian <u>BLACK HILLS</u>	N.F. <u>BLACK HILLS</u>	State <u>SOUTH DAKOTA</u>	Declination <u>12° East</u> 1		
CORNER DIAGRAM ⑥ 		DESCRIBE CORNER MONUMENT FOUND ② FOUND THE BASE OF THE ORIGINAL LIMESTONE 12" x 6" x 8", FIRMLY SET, FLUSH WITH GROUND, OVER A BROKEN POTTERY MEMORIAL. TOP SECTION WITH SCRIBING GONE. (description of monument found: type, material, size, how set (loose or firm), above ground dimensions, how marked or scribed, any other related facts) 2			
PHOTO IDENTIFICATION DATA ⑦ Photo No. _____ Filed At. _____ Object Ident. _____ Ident. by <u>Signature</u> 7		DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND ③ A SCATTERED MOUND OF STONE BEARS SW, 4 FT. A 16" PINE; SCRIBING HEALED OVER; BEARS N 63 E, 18.5 FT. MATCHES RECORD A 10" PINE SNAG, 5 FT. TALL; SCRIBED "HES 000 BT"; BEARS S 60 E, 65 FT. RECORD CALL IS N 60 W, 65 FT. 3			
PLANE COORDINATE POSITION DATA ⑧ State _____ Zone _____ X _____ Y _____ Estab. By _____ 8		DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER ④ FROM CARSON DRIVEWAY INTERSECTION WITH HWY 244, FOLLOW FENCE LINE SOUTH ALONG FOREST EDGE TO THREE WAY FENCE CORNER, APPROX 500 FT. THE CORNER SETS 100 FT SE IN THE BOTTOM OF A SMALL DRAINAGE, RUNS SE, IN SCATTERED PINES. 4			
⑤ Signature _____		Title R.L.S.	Division AAA SURVEYS	Headquarters PRINGLE SD	Date 10-9-91
FS-7100-52 (3/68) 5					

INSTRUCTIONS—Numbers refer to those indicated on the card.

1. Self-explanatory. R.D. denotes Ranger District and N.F. denotes National Forest.
2. Describe the monument found.
3. Describe the accessories found.
4. Describe general location, how to reach, local witnesses and general information.
5. The person or contractor, and date of recovery.
6. Sketch showing major topographic features and B.T.'s in approximate relationship to corner.
7. Identify aerial photograph and tie to picture point. Required when corner record card (7100-52) and photo identification of corners are both required by the contract.
8. Self-explanatory. Required only if the contractor uses state plane coordinates in survey computations.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .220 - EXAMPLE FS CORNER CARD (Form 7100-52)


Back - FS Corner Card, page 2 of 2

BACK

CORNER RECORD (PERPETUATION)

⑨ MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

SET A STANDARD USFS ALUMINUM MONUMENT, 30" LONG, 22" IN THE GROUND, OVER A "DEEP ONE" MAGNETIC MEMORIAL. BURIED ORIGINAL STONE AND POTTERY ALONGSIDE.
USED OLD STONE MOUND TO BUILD A 3' FT DIA. COLLAR AROUND MONUMENT. CAP MARKED:
SET LAND SURVEY MONUMENT AND BOUNDARY SIGN ON RED STEEL POST 1 FT NE.



⑩ ACCESSORIES: DESCRIBE NEW BT's WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A 6" PINE; SCRIBED "I HES 000 BT"; BEARS N 46 W, 10.2 FT.
FOUND A 5/8" REBAR; 6" ABOVE GROUND; BEARS N 47 W, 98.2 FT. SEE REMARKS
PUT TAGS ON BT's AND SNAG.

10

⑪ Work Done By J. SURVEYOR Title SDRLS Date 9-8-91 State Registration No. 1234
or Agency 1234
Certified Cor. Record Prepared? ☒ Yes ☐ No Filed At: PENNINGTON COUNTY COURTHOUSE Date 10-91

11

⑫ REMARKS

REBAR NOTED WAS SET BY LS 66 IN 1965 DURING A PRIVATE SURVEY OF HES-000. THE PLAT ON FILE INDICATES THIS CORNER WAS SET BY IMPROPER METHODS. HAVING FOUND AND CONFIRMED THE ORIGINAL MONUMENT, I REJECT THIS REBAR.

12

⑬ Index File No. C-18 T. 0S R. 0E M. B.H. Tract of Survey No. HES 000 Cor. 1

13


INSTRUCTIONS—Numbers refer to those indicated on the card.

9. Describe work done in remonumenting, refurbishing, or remarking the corner. Fully describe any new monument set.
10. Describe work done to preserve old bearing trees, and fully describe all new bearing trees and objects set.
11. The registered surveyor who accomplished the work, or who supervised it.
12. May be used for information from front of card or other comments.
13. Self-explanatory.

Note: Cards may be typed or completed neatly in ink.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS


EXHIBIT .411 - PLACEMENT OF CORNER MONUMENTS

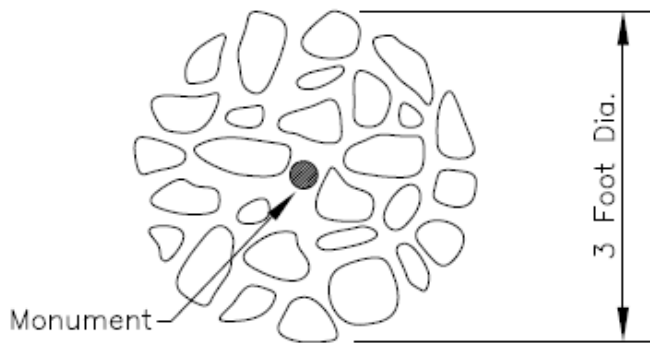

Monument w/Mound of Stone – Typical
PLAN VIEW


NOTES:

1. Native stones within 100' of the corner shall be used to construct a mound around the monument. Where the number of available stones is insufficient to construct a 3 foot diameter mound, the contractor shall construct a mound as large as the available stones will permit.
2. Monuments shall be plumb with the backfill soil compacted to 4" to 6" layers.

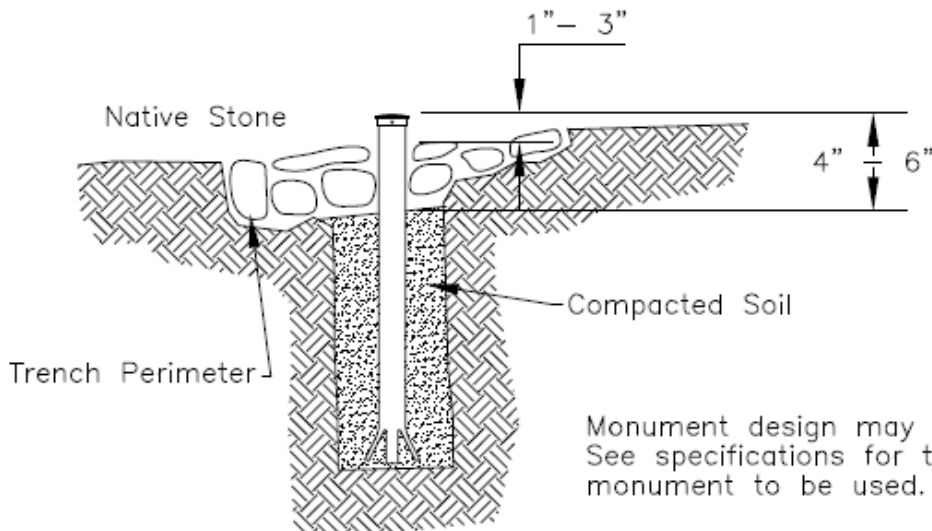

TYPICAL SECTION VIEW

Monument design may vary.
See specifications for type of
monument to be used.

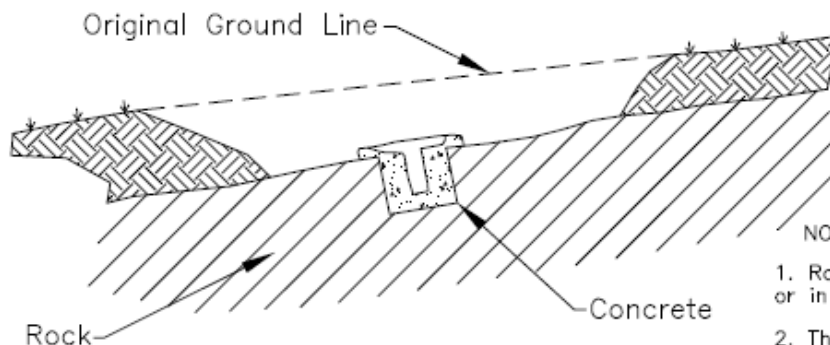


TYPICAL ROCK TABLET INSTALLATION

NOTES:


1. Rock tablets shall be used in solid rock or in place stones impractical to remove.
2. The contractor shall clean the rock surface and provide for drainage.
3. Rock tablets shall be flush to surface.

EXHIBIT .412 - TYPICAL PLACEMENT OF REFERENCE MONUMENTS

TYPICAL PLACEMENT OF REFERENCE MONUMENTS

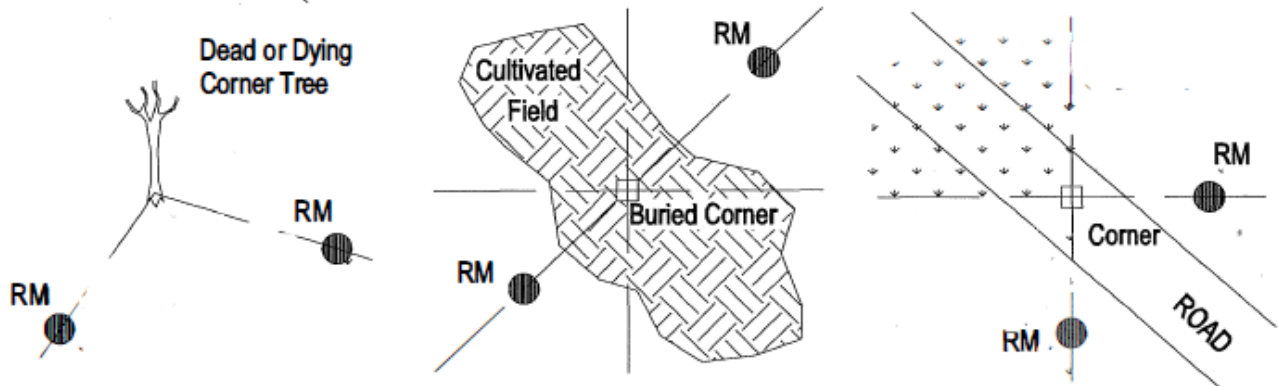


TYPICAL PLACEMENT OF WITNESS CORNERS

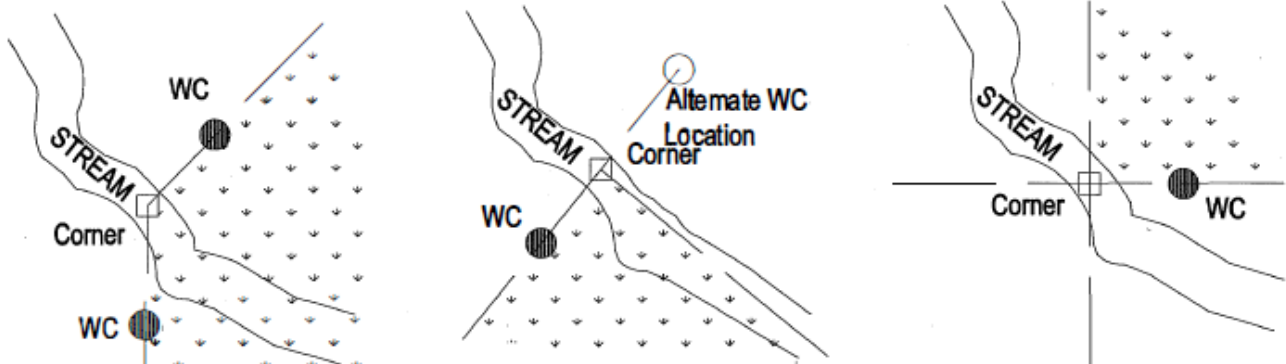

NOTES:

1. In sectionalized land the Manual shall be used.
2. Witness corners shall be placed on the Forest Service property line if practical. The COR may direct they be set in an alternate location.
3. Reference monuments shall be not be placed on or near the Forest Service property line.
4. A guard post with sign 54-9, Land Survey Monument, shall be placed at all reference monuments and witness corners.

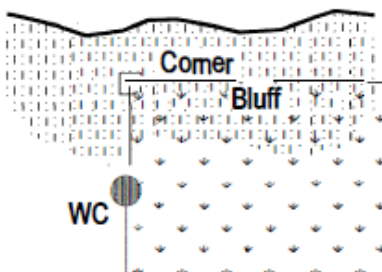


National Forest Land

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS



EXHIBIT .413 - TYPICAL STAMPING OF MONUMENTS, METES AND BOUNDS

CORNER MONUMENT

NOTE: Lettering size shall be no larger than 1/4"

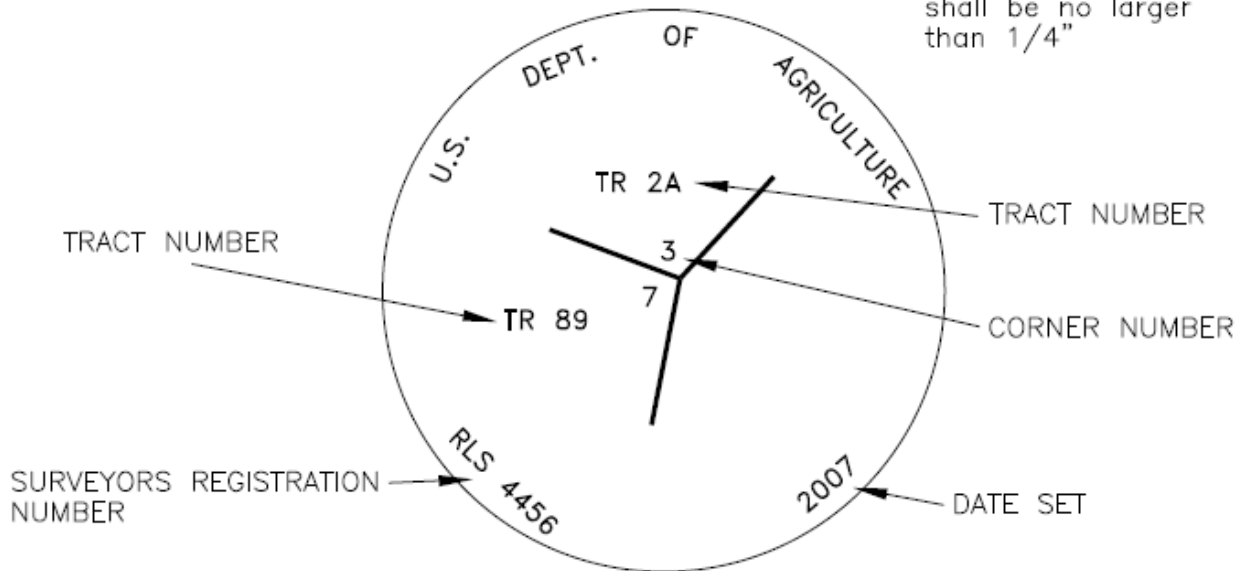


WITNESS AND REFERENCE MONUMENT

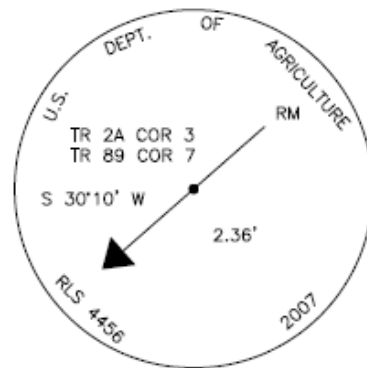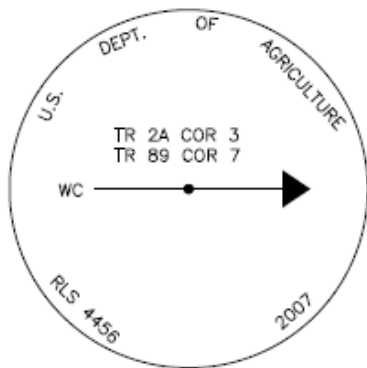

Bearing and distance from reference monument to corner.

EXHIBIT .414 - CORNER TREES

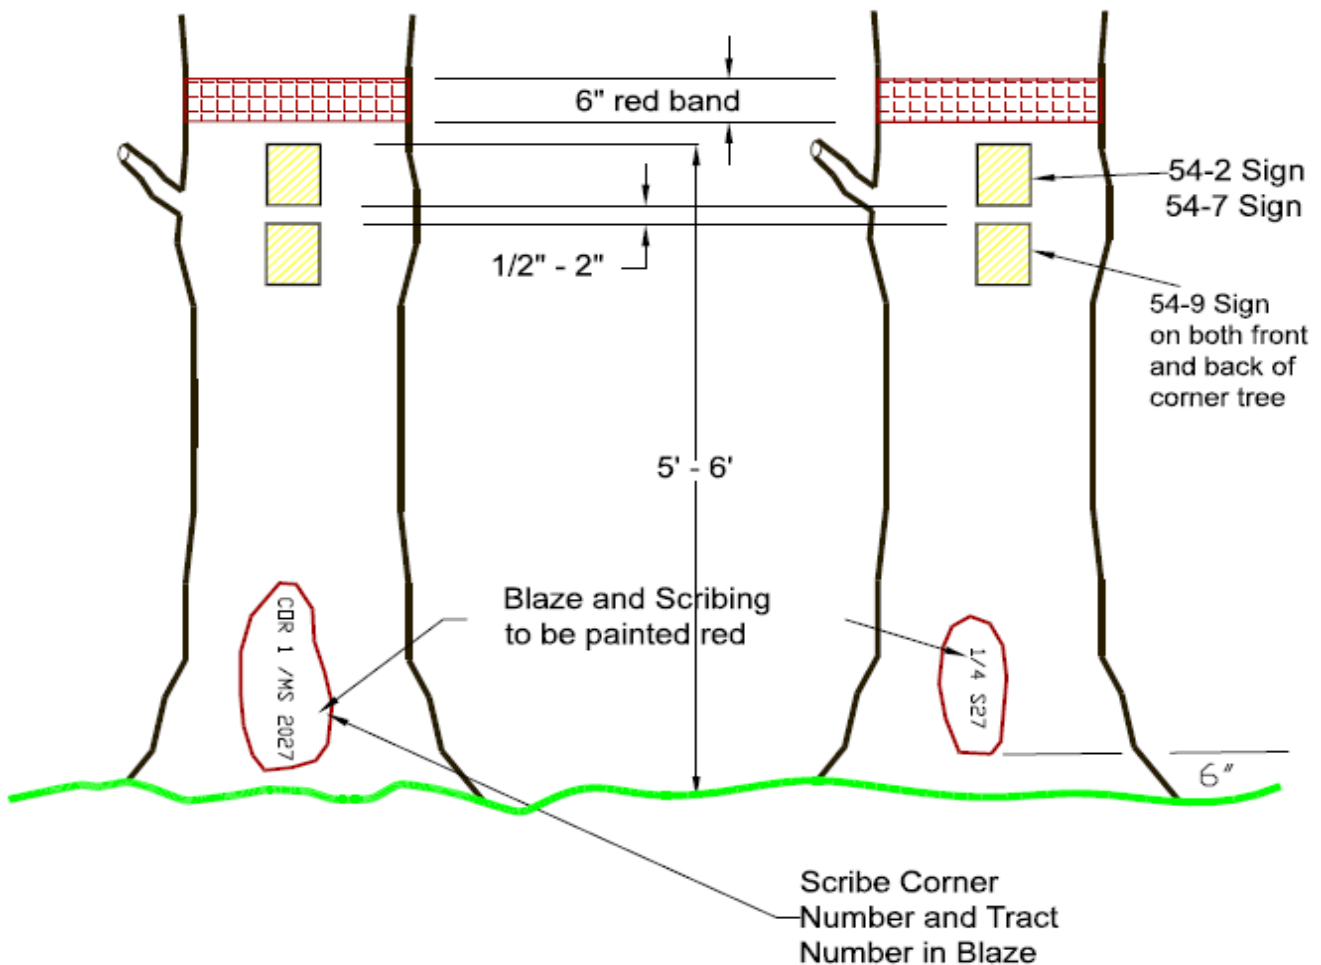


TYPICAL FRONT VIEW OF A CORNER TREE

Notes:

1. For blazing and scribing on sectionalized land, see the Manual.
2. Smooth bark Maple, Alder, Aspen, etc..., shall not be blazed, but shall be scribed and painted as if blazed (bark scribed).
3. Original corner trees shall not be rescribed.
4. All corner trees are to be painted with a 6" red band. The band shall be located around the trunk of the tree approximately 6' above the ground. Rough bark trees shall have the area of the 6" band smoothed before painting.
5. Red Paint shall be neatly applied.
6. Signs shall be attached to corner trees with 2 Aluminum nails per sign. Leave nails protruding at least 1/2" on trees to allow for growth.
7. An Aluminum, Brass, or Stainless Steel washer bearing the Surveyor's registration number shall be nailed to the center of the blaze.
8. Red paint shall be applied to the axe marks and healed marks on healed blazes.

Rocky Mountain Region 2
BOUNDARY MANAGEMENT
CONTRACT SPECIFICATIONS


EXHIBIT .423 - BEARING TREES

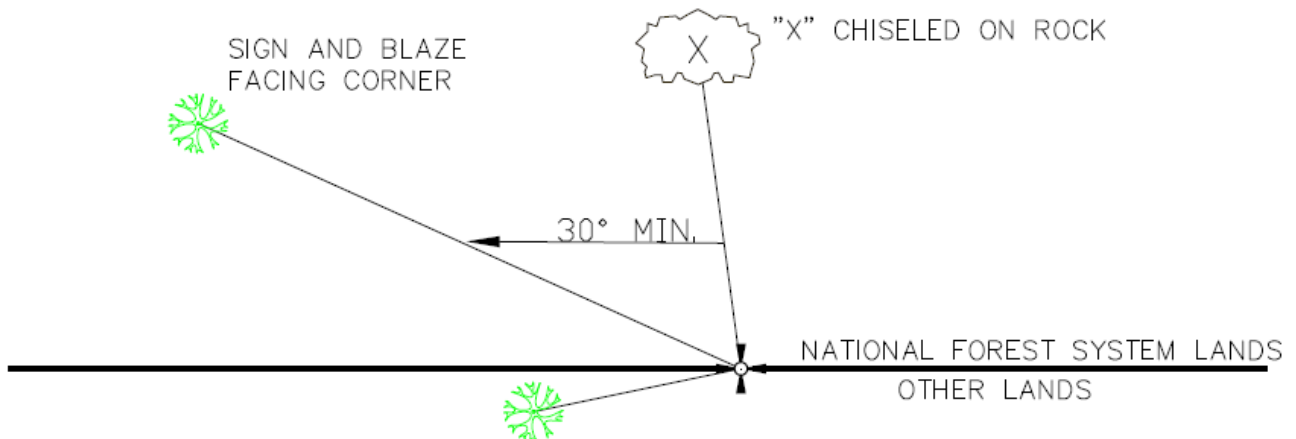

TYPICAL BEARING TREES ON NATIONAL FOREST SYSTEM LANDS

Sectionalized Land

Metes and Bounds

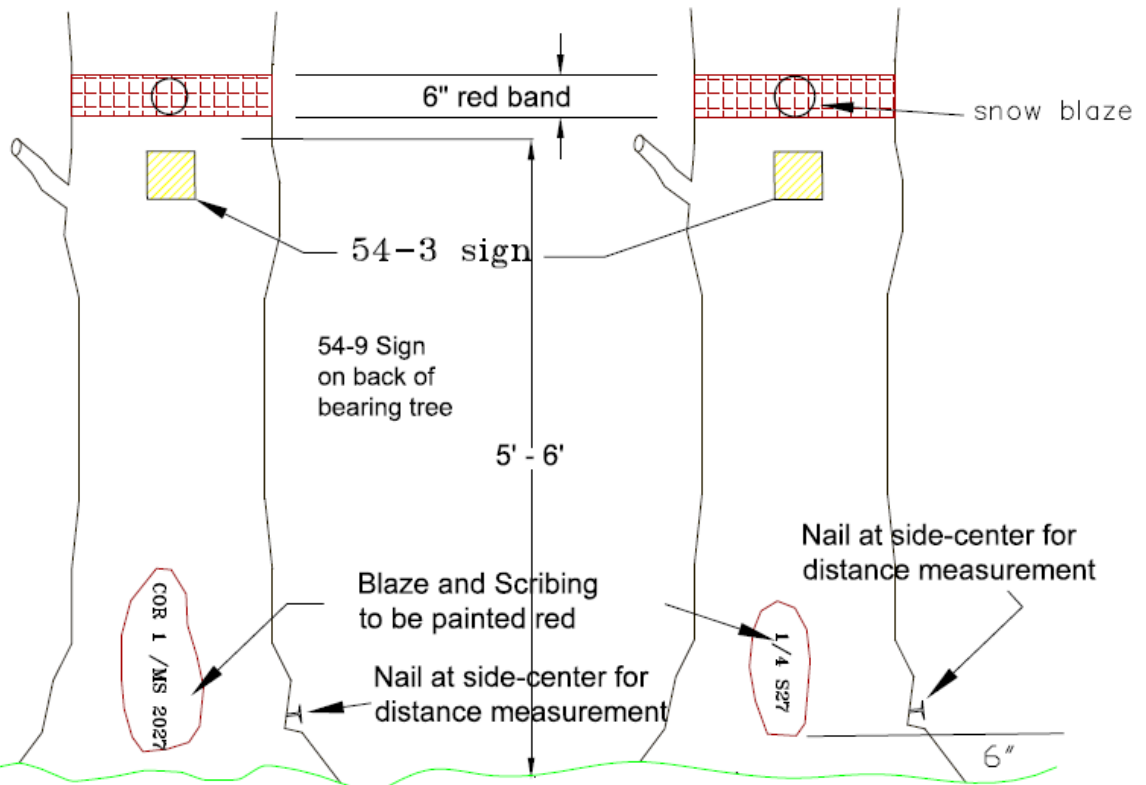

Notes:

1. See Manual for Specific markings.
2. Smooth bark Maple, Alder, Aspen, etc..., shall not be blazed, but shall be scribed and painted as if blazed (bark scribed).
3. Original bearing trees shall not be rescribed.
4. All bearing trees are to be painted with a 6" red band. The band shall be located around the tree approximately 6' above the ground. Rough bark trees shall have the area of the band smoothed before painting.
5. Red paint shall be neatly applied over blazes and scribing.
6. The contractor shall stamp or etch the required information on the 54-3 sign.
7. Signs shall be attached to bearing trees with 2 Aluminum nails per sign. Leave nails protruding at least 1/2" on trees to allow for growth.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .424 - SIGNS



54-2



54-7




54-9




P54-3
(DECAL)




P54-2
(DECAL)




P54-1
(DECAL)



P71-10
(DECAL)



54-6



54-8



27-6A



54-3



54-5

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .430 – COLORADO CORNER RECORDATION

COLORADO LAND SURVEY MONUMENT RECORD Department of Regulatory Agencies Board of Licensure for Architects, Professional Engineers and Professional Land Surveyors 1560 Broadway, Suite 1350 Denver, CO 80202 Phone (303) 894-7800; Fax (303) 894-2310; EMAIL aes@dora.state.co.us ; V/TDO 711	
Report one monument only on this form – Reproduction of this form is authorized. All items are to be filled in by the Land Surveyor using PERMANENT BLACK LETTERING and lines which can be reproduced.	
1. TYPE OF MONUMENT: ☐ SECTION CORNER ☐ QUARTER CORNER ☒ SIXTEENTH CORNER ☐ OTHER _____	
2. DESCRIPTION AND DATE OF MONUMENT FOUND: FOUND 3-1/4" ALUMINUM CAP ON #5 REBAR IN CONCRETE. 10/3/2012	
3. DESCRIPTION OF MONUMENT SET BY YOU TO PERPETUATE THE LOCATION OF THIS POINT: SET 2" ALUMINUM DISC STAMPED "RM FLATIRONS SURVEYING LS 16406" AND BEARING TREE SIGN IN PINE TREE AS SHOWN HEREON.	
4. SKETCH SHOWING RELATIVE LOCATION OF MONUMENT, ACCESSORIES AND REFERENCE POINTS STATING WHETHER FOUND OR SET, SHOW SUPPORTING AND/OR CONTRADICTIONARY EVIDENCE WHERE APPLICABLE:	
N N.T.S. FS# 12-57,759 DRAWN BY: W. BECKETT FOUND 15" PINE WITH BLAZE W/ 1-1/4" YELLOW PLASTIC CAP & NAIL "PE LS 9485" 41.6' 8' WIDE DIRT ROAD 24.0' FOUND 18" PINE WITH BLAZE SET BEARING TREE SIGN AND 2" ALUM. DISC FOUND 3-1/4" ALUMINUM CAP ON #5 REBAR IN CONCRETE. Not to scale Stamping on Cap 5. CERTIFICATION This is to certify that I was in responsible charge of the surveying work described in this record and that to the best of my knowledge the information presented herein is true and correct. Name (Please Print): <u>JOHN B. GUYTON</u> Firm Name: <u>FLATIRONS, INC.</u> Firm Address: <u>3825 IRIS AVE SUITE #395</u> <u>BOULDER, CO 80301</u> Phone: <u>(303) 443-7001</u> 6. LOCATION DIAGRAM 1" = 1 Mile 21 N ● = Location of Monument Signature/Date through Seal 7. SEC. <u>21</u> T. <u>6N</u> R. <u>72W</u>, 6TH P.M. COUNTY <u>LARIMER</u> INDEX REF NUMBER <u>13-K</u> **8. SEC. _____ T. _____ R. _____ P.M. COUNTY _____ INDEX REF NUMBER _____ * To be used only for monuments located on county lines Rev.02/01/2011	
RECEIVED AT OFFICE OF THE COUNTY CLERK _____ COUNTY BY: _____ DATE: _____ Record to be filed numerically by Index Reference Number, then alphabetically by letter in the index reference number, then under appropriate Township, Range, and Meridian.	

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS


Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS


EXHIBIT .521 - SIGN PLACEMENT

NOTES:


1. Posts shall be plumb and solidly planted with a minimum of 24" in the ground or supported to 24" above the base with a rock mound.
2. Posts with attached decal shall be set per manufacturers recommendations.
3. Sign 54-5, 54-6, or 54-8, "Location Poster," shall be placed where all marked boundary line cross roads and trails.
4. Post shall be set on the cut side of road, off the maintained surface.

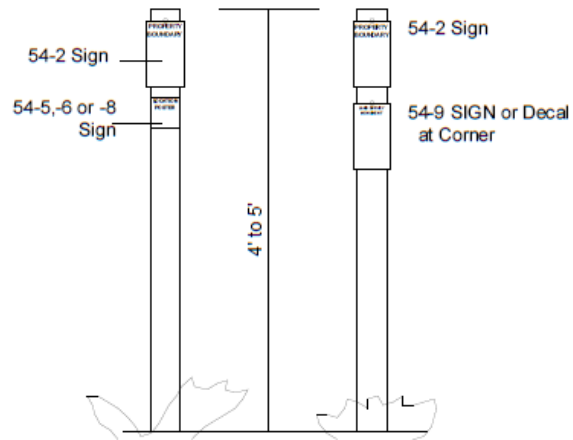

**TYPICAL SIGN
AND POST INSTALLATION**

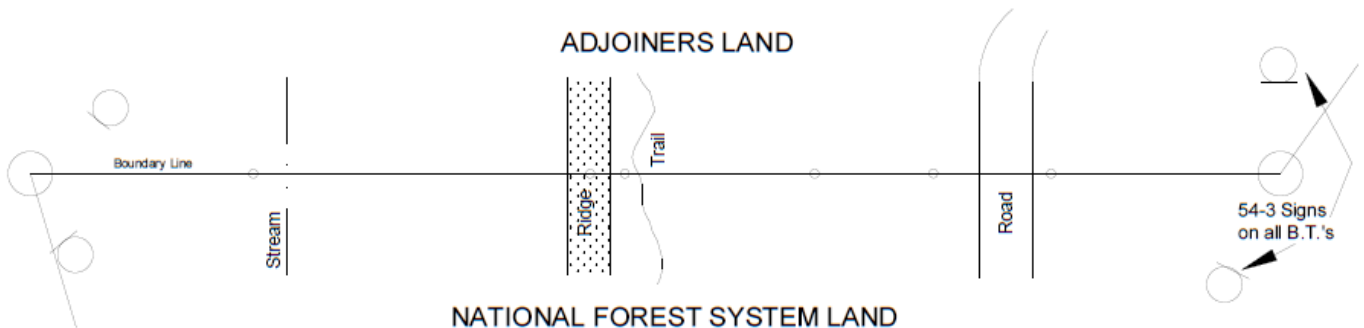

EXAMPLE PLAN VIEW OF BOUNDARY LINE SHOWING SIGN PLACEMENT

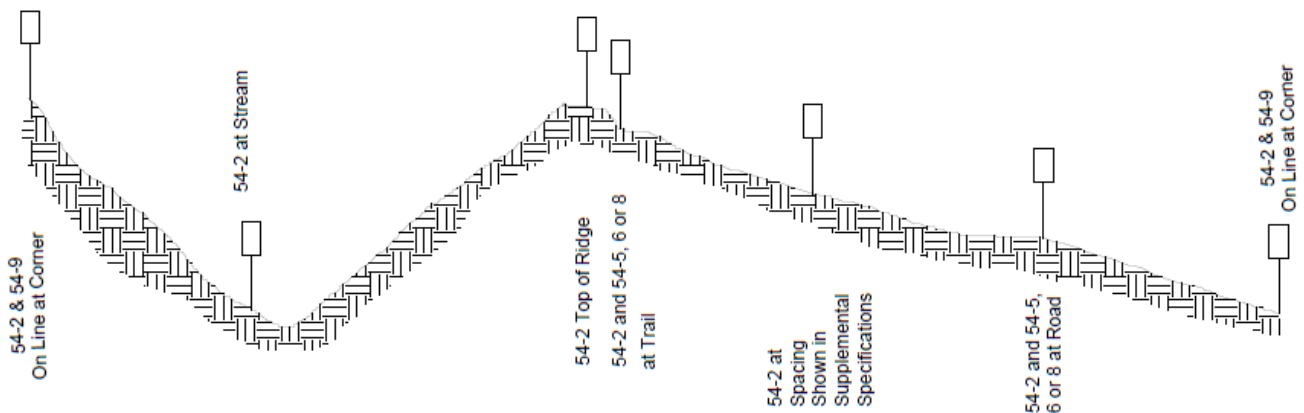


EXAMPLE PROFILE OF BOUNDARY LINE SHOWING SIGN PLACEMENT

Rocky Mountain Region 2
BOUNDARY MANAGEMENT
CONTRACT SPECIFICATIONS

EXHIBIT .522 - MARKING AND POSTING THE BOUNDARY LINE

GENERAL APPEARANCE

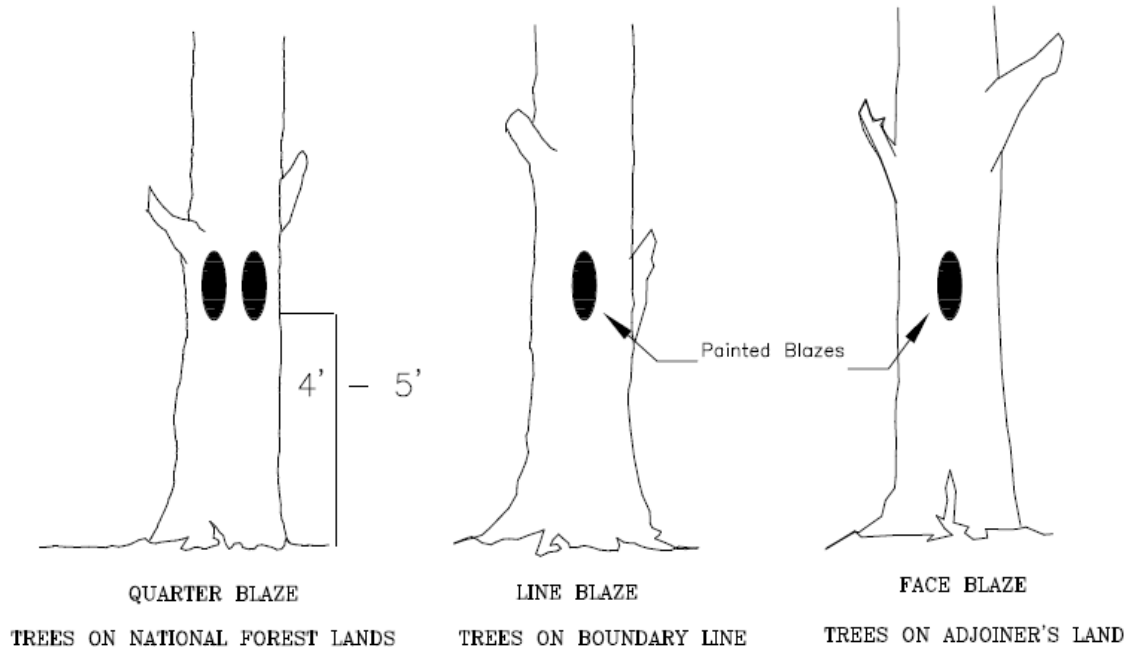


ORIENTATION OF BLAZES

NOTES

1. The three types of markings used on trees along the National Forest boundary lines are referred to as Quarter Blazes, Face Blazes and Line Blazes. The markings are used at the locations shown on page 2 of this Exhibit.
2. A blaze is made by cutting off a vertical strip of bark and a very thin layer of the underlying wood tissue. The strip shall be about 6 to 8 inches long, 2 to 4 inches wide, and the top and bottom ends shall be smoothed out.
3. A durable, oil base, red enamel paint shall be neatly applied to all blazes.

EXHIBIT .522 - MARKING AND POSTING THE BOUNDARY LINE

NATIONAL FOREST SYSTEM LANDS

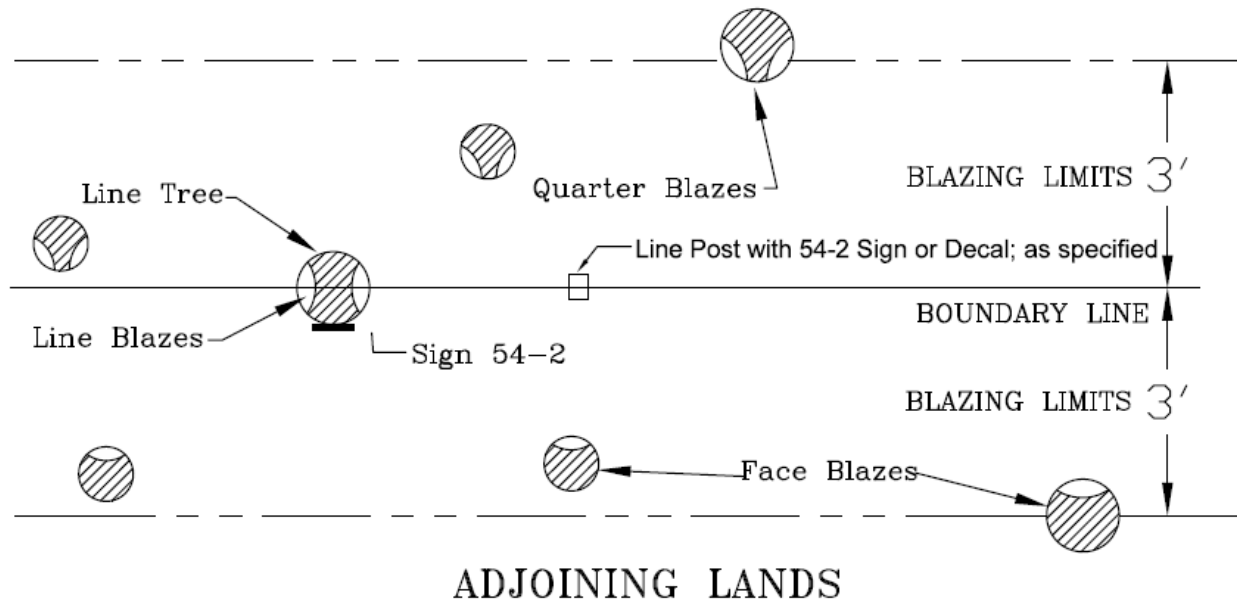


Notes:

1. Permission shall be obtained from adjoining landowners before their side of the boundary line is cleared or blazed.
2. Trees on National Forest System land within 3 feet of the boundary line shall be quarter blazed as shown.
3. Trees on adjoining land within 3 feet of the boundary line shall be face blazed as shown.
4. Trees on the boundary line shall be line blazed on both sides of the line tree along the direction of the line as shown above.
5. Posts, line monuments and line blazes shall be placed only on the boundary line after it has been located to the standard specified in the contract.
6. Decals 54-2 or 54-1 shall be placed on specified line posts only after the post has been thoroughly cleaned.
7. Sign 54-2 or 54-7 shall be attached to all line trees, at the spacing specified in the special project specifications, with 2 aluminum nails. The nails shall be left protruding at least 1/2 inch on trees to allow for growth.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .600 - EXAMPLE PLAT

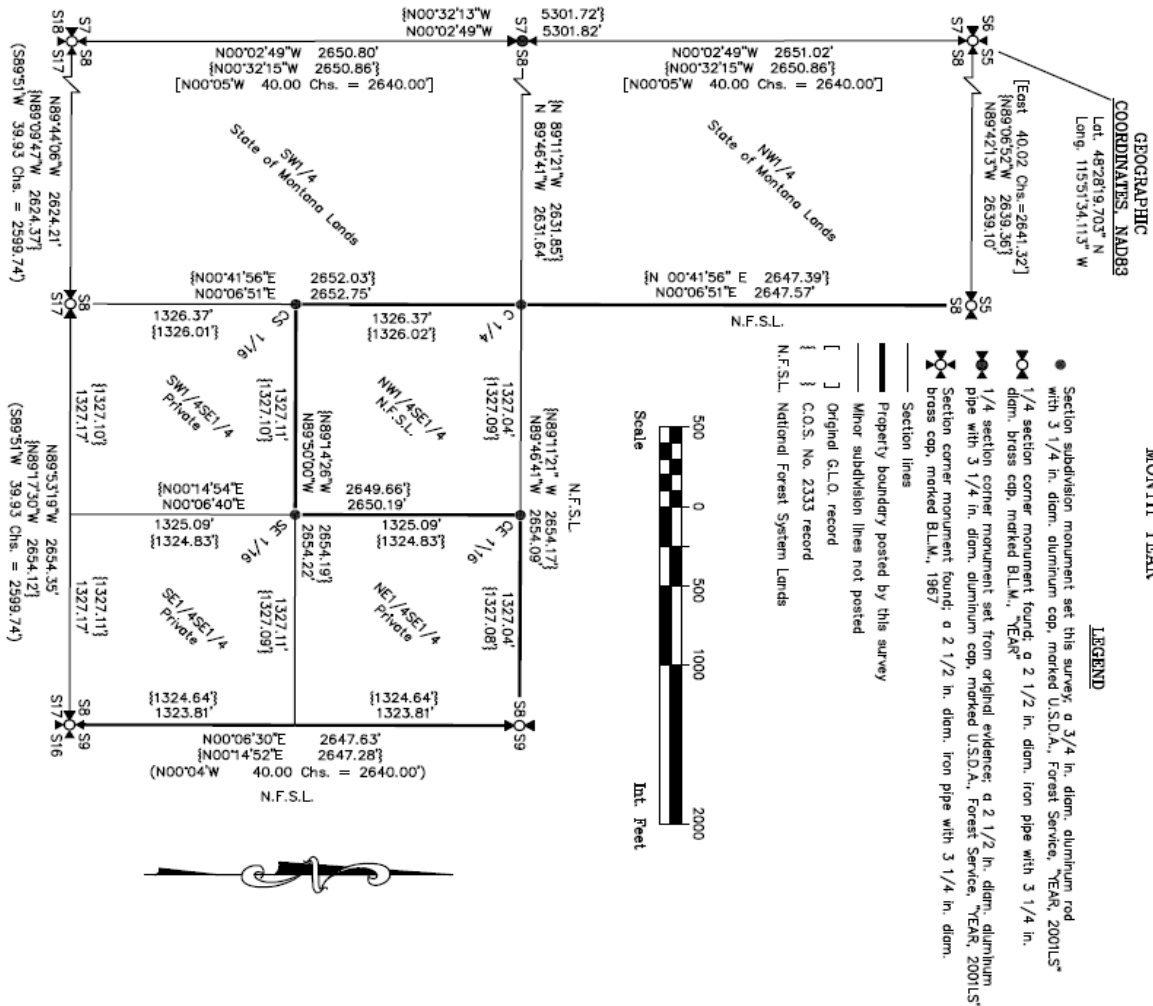

FOREST SUPERVISOR'S CERTIFICATE
This survey was made at my request for National Forest Management purposes
NAME, Forest Supervisor Signature Date

PURPOSE OF SURVEY
The purpose of this survey is to retracement and mark the boundaries of existing parcels, distinguishing between National Forest System Lands and private lands, therefore no division of land is hereby created, exempting this survey from subdivision review, Sec. 76-3-207, MCA.

HISTORY OF SURVEY
1893, Original G.L.O. Township and Subdivision by Daniel P. Munhroe
1967, B.L.M. remonumentation of G.L.O. corners by Woodrow E. Damm
1995, C.O.S. No. 2333, subdivided Sec. 8 by John N. Good, Reg. No. 0005

METHOD OF SURVEY
Project control was accomplished using survey grade Global Positioning System observations with a constrained Least Squares Adjustment, based on HARN control stations "Freeman" and "Key".
A one second total station with data collector was utilized with closed traverse procedures to measure to original controlling corners and project control. Offsets to true line were computed for marking and posting the property line. The Property Boundary marking and posting was done by blazoning and painting trees, and placing galvanized steel delineator posts with Property Boundary decal, along the line at approximately 250 foot intervals.

BASIS OF BEARING
Bearings are based upon the geodetic meridian from GPS ties to the HARN network. A local Transverse mercator coordinate system was established with the origin at the northwest corner of Secs. 8, where the geodetic forward bearing equals the local grid bearing.

SURVEYOR'S NOTE
Additional monument information can be found on the Certified Corner Recordation documents filed DATE 00/00/00 on assigned pages "0000" through "0001" at the APPROPRIATE County.

SURVEYOR'S CERTIFICATE:
Signature Date
John Q. Surveyor, "STATE" Lic. No. 2001LS

CERTIFICATE OF EXAMINING COUNTY OFFICIAL:
Approved this _____ day of _____, 200__ A.D.
Signature

Examining Official

CERTIFICATE OF CLERK AND RECORDER:
State of "APPROPRIATE STATE", County of "PROPER COUNTY", filed this _____ day of _____, 200__ A.D. at _____ o'clock
Signature by _____ Deputy
County Clerk Recorder

DOCUMENT NUMBER: _____ Assigned by County

CERTIFICATE OF SURVEY NO.: _____ Assigned by County

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .620 - CADASTRAL PLAT CHECKLIST

This list shall be checked, signed and dated by a reviewer through all phases of preparing the record.
A copy shall be sent with the draft plat submitted for review.

T. _____, R. _____, Sec.(s) _____,

_____ Mer., _____

_____ National Forest Project _____

Reviewer

Date

Plat Contents

- _____ Sheet Size
- _____ Border Size
- _____ Surveyed Lines Solid
- _____ Unsurveyed Lines Dashed
- _____ Line Weights Adequate
- _____ Lettering Legible
- _____ Title conforms to State law
- _____ Subtitle reflects type of survey
- _____ Legal Identifier (Section, Township, Range, Meridian, MS,

HES)

Orientation

- _____ Scale Bar
- _____ North Arrow
- _____ Geographic Position (1 minimum, 2 or more if project extents over 1.5 miles)
- _____ Datum and Method used to determine
- _____ Tie to Geodetic Control shown
- _____ Name and Establishment Date of Control Station(s) used

Plat Memo

- _____ History of Surveys
 - _____ Townships
 - _____ Sections
 - _____ Subdivisions
 - _____ Other
- _____ Purpose of Survey
 - _____ To Mark and Post National Forest Property Boundary
 - _____ Reference to type of posts set and intervals.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .620 - CADASTRAL PLAT CHECKLIST

- ☐ Date of Survey
- ☐ Project Name / Contract No.
- ☐ Basis of Bearing
- ☐ Data available in other sources
- ☐ Methods
- ☐ Instrumentation
- ☐ Positional Accuracy Statement
- ☐ Special Circumstances
- ☐ Disclaimer (Representation of Unsurveyed Features)

The Survey

- ☐ Records units of measure shown
- ☐ Reported measurements (proper precision)
- ☐ Corner Status evident
- ☐ Legend complete
 - ☐ Reflects corner status
 - ☐ Distinguishes Posted National Forest Property Boundary
- ☐ Adequate Information to determine and check survey methods
- ☐ On Mineral Survey or HES, tie to Rectangular Survey shown
- ☐ On MS, HES, etc, rectangular lines projected where feasible
- ☐ Ownership Labeled
 - ☐ "Private Lands" and "National Forest System Lands"
- ☐ Aliquot parts, lots, labeled
- ☐ Acreage properly shown
- ☐ Topography shown and labeled
- ☐ Cultural Features, fences, etc. adjacent to line shown and labeled

Certifications

- ☐ Surveyor's Certificate
- ☐ Forest Supervisor's Certificate
- ☐ County Certification/Approval/Recording Information

Comments: _____

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .910 - EXAMPLE SURVEYOR'S REPORT

CADASTRAL SURVEY REPORT

_____ LAND SURVEY

_____ CONTRACT No.

SECTION(s) _____

T(s) _____, R(s) _____, _____ MERIDIAN

_____ RANGER DISTRICT

_____ NATIONAL FOREST

_____ COUNTY

_____ STATE

CONTRACTOR

_____ NAME

_____ ADDRESS

_____ CITY

_____ STATE

_____ ZIP

AWARDING OFFICE

_____ NATIONAL FOREST

_____ ADDRESS

_____ CITY

_____ STATE

_____ ZIP

CONTRACTING OFFICER: _____

CONTRACTING OFFICER'S REPRESENTATIVE: _____

INSPECTOR(s) _____

Page 1 of 3

EXHIBIT .910 - EXAMPLE SURVEYOR'S REPORT

PURPOSE: The purpose of this contract was to perform professional land surveying services.
This contract included:

(List each required service, which will normally correspond to the contract pay items)

HISTORY OF PRIVATE SURVEYS: Briefly state the name and date of any private surveys, that are not indicated on the cadastral plat, that affect this survey. The report should detail why the private survey was or was not used in the conduct of this survey.

PROCEDURE:

CORNER SEARCH CONDUCTED: State the result of corner search efforts. It is not necessary to repeat the detailed information contained in the corner record forms, but the minimum information required is (1) which corners were located by original physical evidence, (2) which corners were located by parole evidence, (3) other surveyor's monuments were accepted, and (4) which corners were considered lost and a brief explanation of the extent of search efforts for the original physical evidence of the monument and accessories.

REMONUMENTATION ACCOMPLISHED: State which original corners were remonumented.

CONTROL SURVEY: Briefly describe the method or combination of methods that were used to (1) obtain the position of the controlling corners,(2) layout the position of lost corners and any new corners required to be established by the contract, and (3) locate the position of points on the boundary necessary for marking and posting the line. An example follows:

"A 5" total station with specifications of plus or minus 2mm plus 2 PPM was used on the control survey. The instrument was in proper adjustment and a base line user's report for the EDM is attached. The control survey utilized traverse methods that formed closed loops, which were adjusted by least squares method. Boundary lines were located by running true line between corner monuments. Angles were taken one direct and one reverse and these two angles were averaged and used for computations. Backsights were made to nails in the top of 1-meter laths and foresights were to plumb range poles. The estimated sighting error is 0.03 feet average. Distances were measured once to the foresight leg. Reductions to the horizontal were accomplished by means of vertical angles repeated twice in the direct and reverse position to the center of the prism, which was at a constant height of 6 feet. Computed moves were accomplished by turning the angle and shooting the distance direct and reverse.

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .910 - EXAMPLE SURVEYOR'S REPORT

Monumentation: Explain the rationale for accepting or rejecting any other survey monuments found in the vicinity of a computed corner position. Explain what proportioning method was used to reestablish lost corners from adjacent existing corners. List which corners were established and monumented.

LAND OWNER CONTACTS AND CONFLICTS: Cite the result of landowner contact for permission to enter and mark and the private side of the boundary line. Include a brief statement of any apparent conflicts of possession or title discovered.

ENCROACHMENTS: Include a narrative of encroachments discovered and reported to the Contracting Officer Representative.

DATE OF SURVEY:

Survey Commenced _____

Survey Completed _____

PERSONNEL:

Contractor's Representative _____


Land Surveyor in charge _____

Assistants: _____

SURVEYOR'S CERTIFICATE: I, _____, (State) Registered Land Surveyor No. _____ do hereby certify that this report is a true and correct account of a survey made by me or under my direction, under U.S.D.A. Forest Service Contract No. _____.

Signature

Date



Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .962 - RIGHT OF WAY SURVEY CHECKLIST

USDA-FOREST SERVICE

RIGHT-OF-WAY CHECKLIST
(REF. FSH 7109.15, R-1 25.65)

Project _____ Number: _____

Ownership _____

INSTRUCTIONS: Use this form as an aid in preparation and checking of right-of-way plats. All questions should be answered by placing an "X" in the box, or if the question is not applicable, indicate by drawing a line through the box.

1. Is the following information shown in the title block of the plat?

A. U.S. Department of Agriculture	H. Name of State
B. Forest Service	I. Name and Number of Project
C. Northern Region	J. Name of Surveyor
D. Name of Forest	K. Date of Survey
E. Right-of-Way Plat	L. Scale of Plat (Use Bar Scale)
F. Description of Land Crossed	M. Date of Plat
G. Name of County	

☐ YES
2. If there is more than one sheet, is there an index map showing the relation of the right-of-way to the found corners and PLS subdivisions, mineral survey, or homestead entry survey? Is each sheet numbered? ☐ YES
3. Is a north arrow shown on each sheet of the plat? ☐ YES
4. Is the origin of bearing shown? ☐ YES
5. Has the survey been closed? ☐ YES
6. Are the legal corners labeled as found and tied or, if not found, as projected?
Are the found corners adequately described? ☐ YES
7. Are the property lines marked projected where corners are not found, or if only one corner along a line is found? ☐ YES
8. Are the property lines correctly labeled with PLS record bearings and distances in record dimensions, and found Forest Service bearings and distances? ☐ YES
9. Are all pertinent occupancy lines including existing right-of-way lines correctly labeled? ☐ YES
10. Is the number of corner ties shown commensurate with the value of the land and ROW improvements? ☐ YES
11. Are ties to found corners shown and properly labeled at each change of ownership? ☐ YES
12. Is the station and the bearing of the tangent to the P.O.C. shown where there is a change of ownership on a curve? ☐ YES

R1-FS-7154-1 (07/83)

Rocky Mountain Region 2
BOUNDARY MANAGMENT
CONTRACT SPECIFICATIONS

EXHIBIT .962 - RIGHT OF WAY SURVEY CHECKLIST

- | | |
|---|------------------------------|
| 13. Are the L and P lines properly labeled? | ☐ YES |
| 14. Are existing natural monuments and cultural improvements shown, with ties when appropriate? | ☐ YES |
| 15. Are appropriate subdivisions and/or Government lots shown and correctly labeled? | ☐ YES |
| 16. Are the full names of the property owners shown on all subdivisions and other parcels of land crossed or closely approached by the right-of-way? Are corporate landowner's names legally correct? | ☐ YES |
| 17. Is the right-of-way width dimensioned on each sheet and at each change of width, and do the dimensions tie the right-of-way to the centerline. | ☐ YES |
| 18. Is the right-of-way acreage properly shown? | ☐ YES |
| 19. Have all the survey data and survey computations been checked? | ☐ YES |
| 20. Has all plotting been checked? | ☐ YES |
| 21. Is the ROW plat approved and sealed by an RLS of the jurisdiction? | ☐ YES |
| 22. Is the ROW plat approved by the Grasslands Engineer? | ☐ YES |
| 23. Has the plat been checked for copying errors and omissions and have all bearings and distances been checked with protractors and scale? | ☐ YES |
| 24. Is the plat legible, neat, and can it be readily folded to 8-1/2 x 11 inch size for filing? Have you considered reducing the plat photographically to letter size? | ☐ YES |
| 25. Is the Beginning and Ending ROW shown? | ☐ YES |

CHECKED BY:

APPROVED BY:

Signature _____
Date _____

Signature _____
Date _____