

MISSISSIPPI RIVER AND TRIBUTARIES



Miss River Dredging



Miss River Navigation



Atchafalaya Basin

Zach Cook – MVM Senior PM
Daniel Sumerall – Regional MRL PM
Ryan Neumann – MVN Senior PM
2025 MVD Industry Day
19 February 2025



Miss River Levees – Flood Risk Management



CI Revetment – Flood Risk Management



US Army Corps
of Engineers®





U.S. ARMY

Mississippi River and Tributaries Project

Great Flood of 1927

- 27,000 Square Miles Inundated
- 700,000 People Impacted
- 500 Deaths
- Economic Damages = \$1 Billion

Flood Control Act of 1928 & Subsequent Acts


Signed on May 15, 1928

(13 Months After the First Levee Breach)

Comprehensive Navigation & Flood Control Project

- Levees and Floodwalls
- Floodways and Backwater Areas
- Channel Improvement and Stabilization Features
- Tributary Basin Improvements (Subsequent Acts)

\$21.5 Billion Federal Invested :
\$2.45 Trillion Flood Damages Prevented
Benefit to Cost = \$114 : \$1

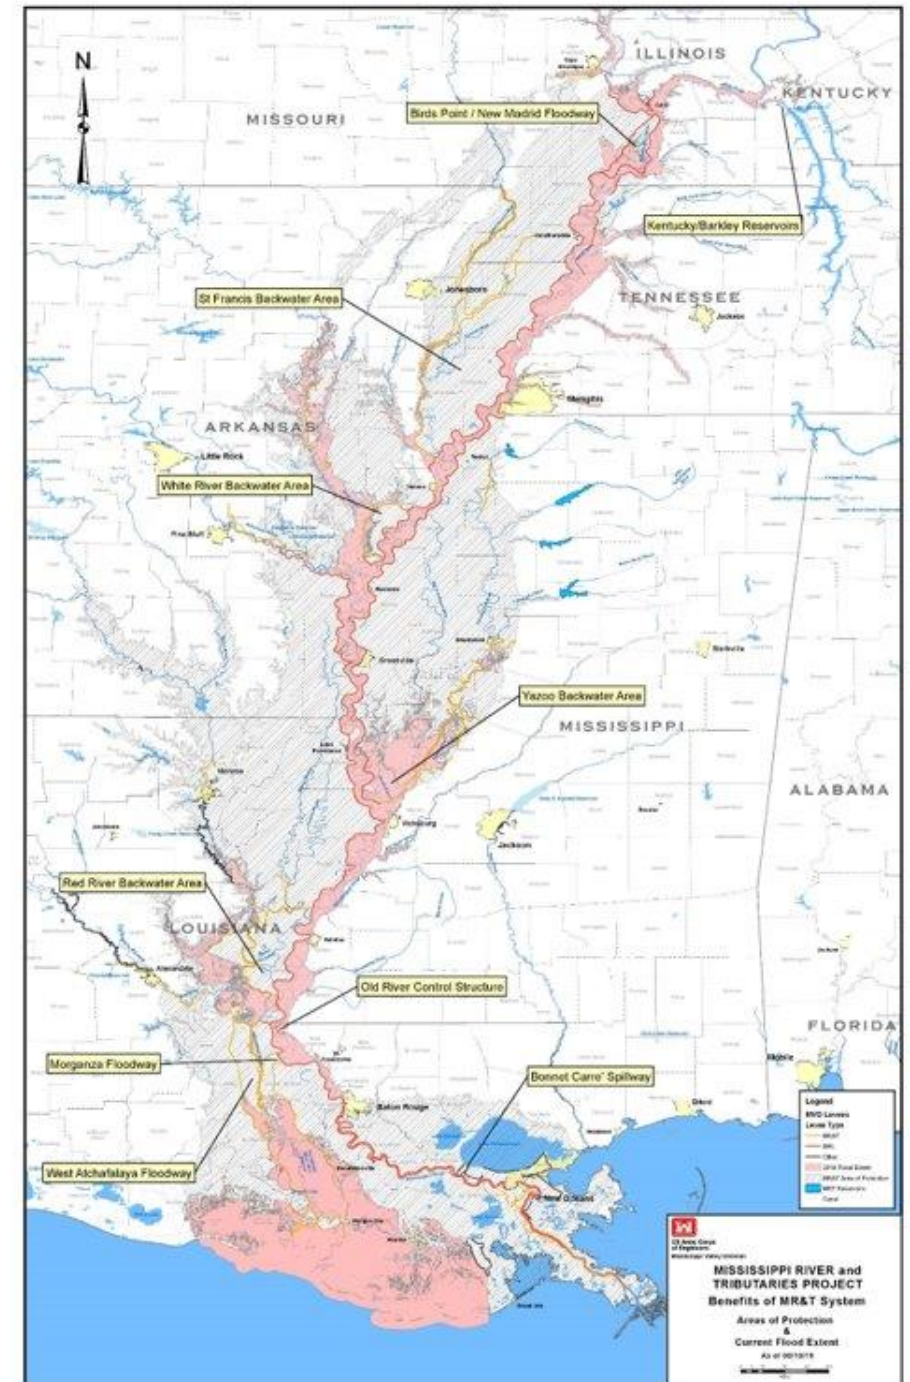




U.S. ARMY

MR&T VALUE TO THE NATION

3



- \$21.5B invested for planning, construction, O&M since 1928.
- \$2.45T flood damages prevented since 1928.
- \$165.6B flood damages prevented in 2024.
- \$234B flood damages prevented in 2011.
- 114 to 1 return on each dollar invested.
- 10.5 to 1 Benefit-to-Cost Ratio @ 7% OMB rate. (FRM Benefits Only)
- ~589M tons of cargo moved on the MS River system each year.
- \$690M total expenditures in 2024.
- \$7.5B in transportation savings in 2024.

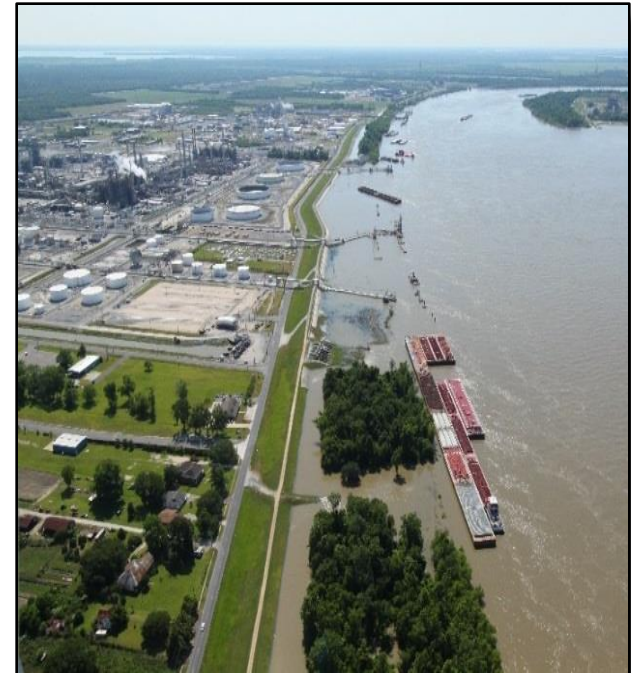




U.S. ARMY

CHANNEL IMPROVEMENT –

INFRASTRUCTURE ON THE LOWER MS

- 3 USACE Districts encompassing portions of 7 states
- Confluence of the Ohio & Mississippi River to Head of Passes (approx. 1,000 river miles)
- “Channel Improvement” Infrastructure provides Navigation, Flood Risk Management, and fosters Environmental Protection & Enhancements
 - Infrastructure:
 - Dike Length: 341 miles
 - Revetment: 1058 miles

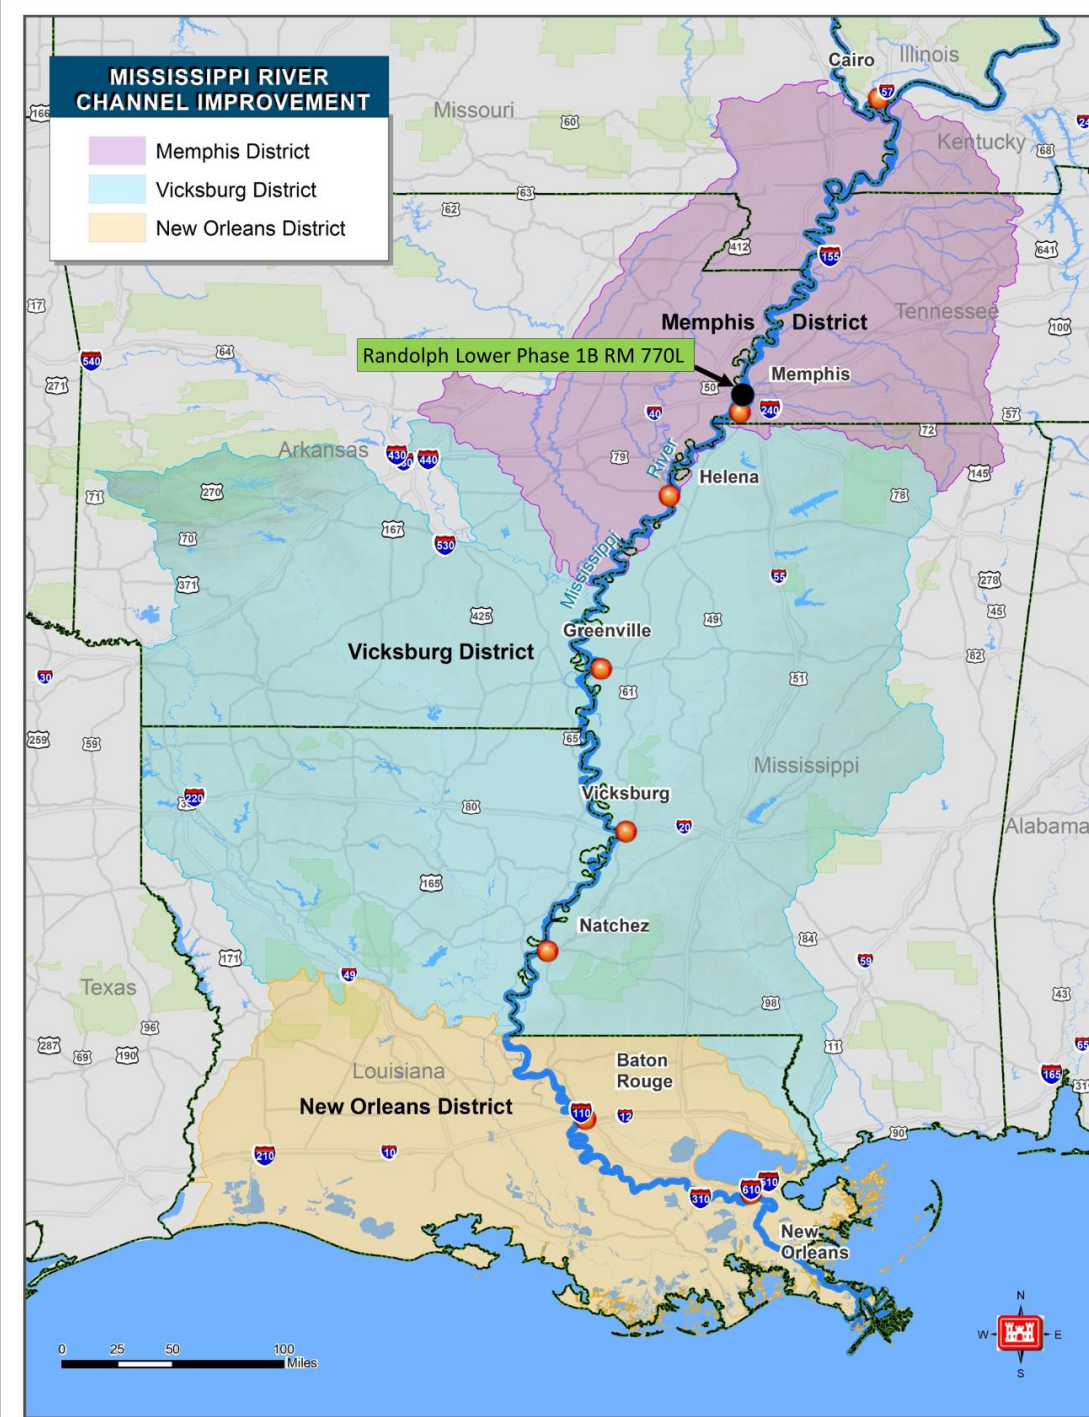



MISSISSIPPI RIVER CHANNEL IMPROVEMENT

5



Dredging



Dike Construction



Clearing and Snagging (C&S)



Revetments



Mat Sinking Unit (MSU)



Bank Grading Unit (BGU)



MISSISSIPPI RIVER LEVEES

6


The Mainline Mississippi River Levee System (MRL) extends from Cape Girardeau, MO to Head of Passes, LA and is approximately 1,610 miles in length.

The MRL lies within the Memphis, Vicksburg, and New Orleans Districts. Segments of the MRL in all 3 Districts are below the authorized grade and/or require other work such as seepage remediation or slope flattening.



MISSISSIPPI RIVER LEVEE CONSTRUCTION

- Levee Enlargements
- Seepage Berms
- Sheet Pile
- Relief Wells

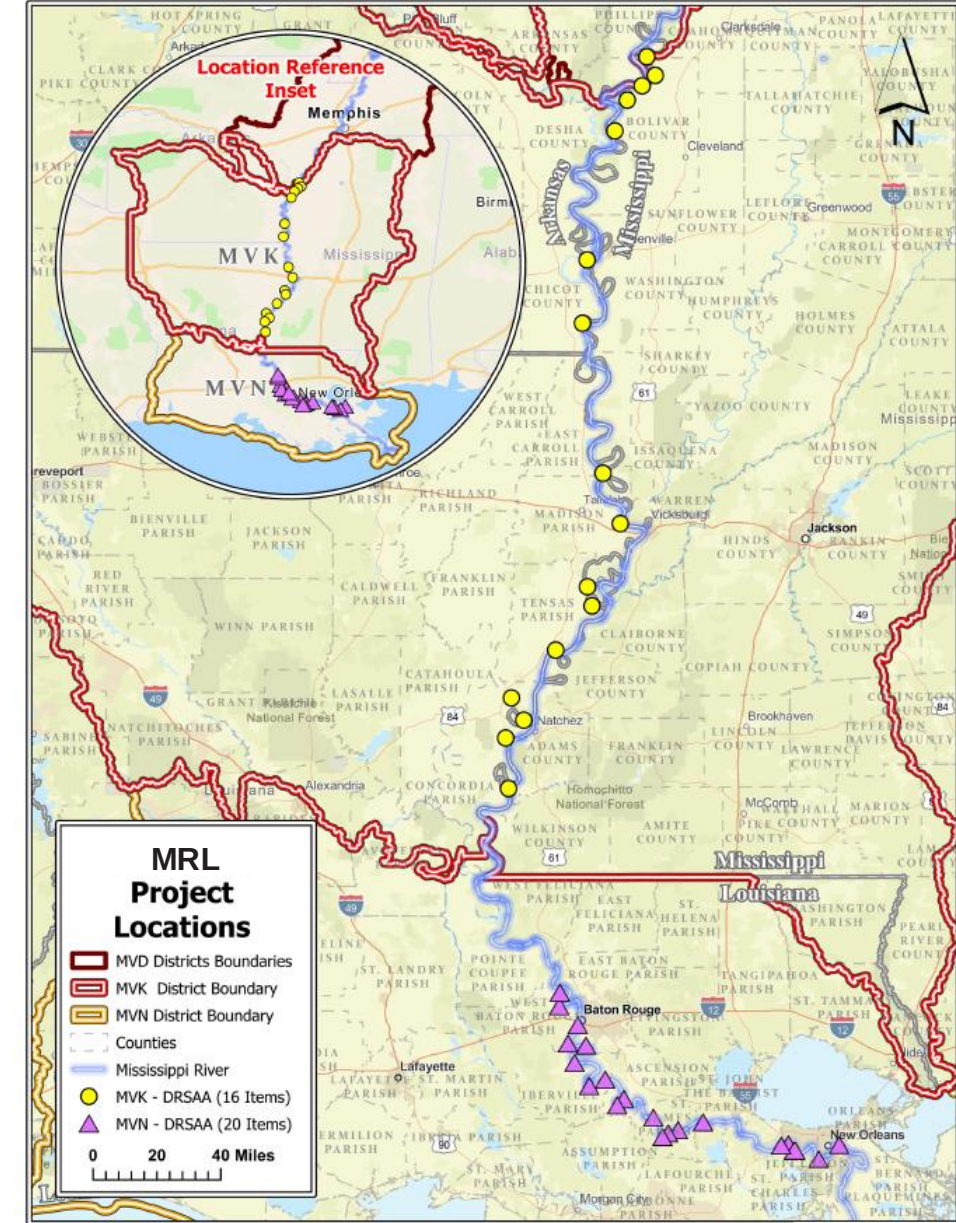




ATCHAFALAYA BASIN OVERVIEW

8

- The Atchafalaya Basin is the largest existing wetland in the United States encompassing 1.4 mil acres of land.
- The Atchafalaya Basin consists of 450 total miles of levees and floodwalls.
- The System is designed to carry one half of the 3,000,000 CFS project flood at the latitude of Old River, Louisiana.
- Tentative projects for award consist of levee lifts/enlargements
- There are eight (8) contracts:
 - Seven (7) features under design
 - One (1) currently in construction
- Two (2) contracts tentatively upcoming for award before 2027
- Project awards range in magnitude from \$0 to \$20M

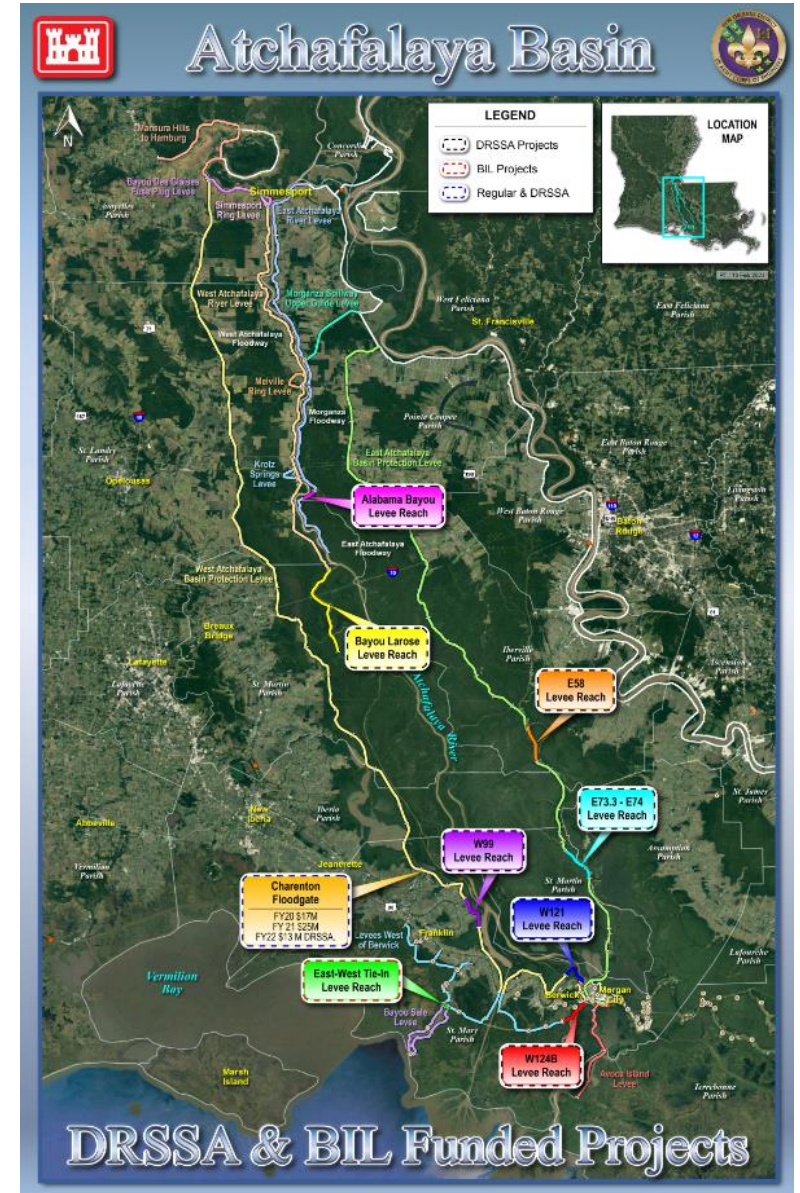




MORGANZA TO THE GULF

9

- Morganza to the Gulf (MTG) is designed to reduce the risk of damage related to storm surge to approximately 52,000 structures and a population of over 200,000 in an area of intense concentration of energy infrastructure near the confluence of two nationally significant navigation corridors in the Mississippi River and the Gulf Intracoastal Waterway (GIWW).
- The project is designed to provide a 100-year level of risk reduction (LORR) hurricane and storm risk reduction project in Terrebonne and Lafourche Parishes, Louisiana, while ensuring navigational passage and tidal exchange.
- MTG consists of 98 total miles of levees and structures.
- Tentative projects for award include Structures (floodgates, control structures, floodwalls), levees, wetland creation, and compensatory mitigation credit procurement.
- There are nineteen (19) features under design and two (2) under construction/procurement.
- Four (4) contracts tentatively upcoming for award before 2027.
- Construction contract awards range in magnitude from \$30M to \$100M.

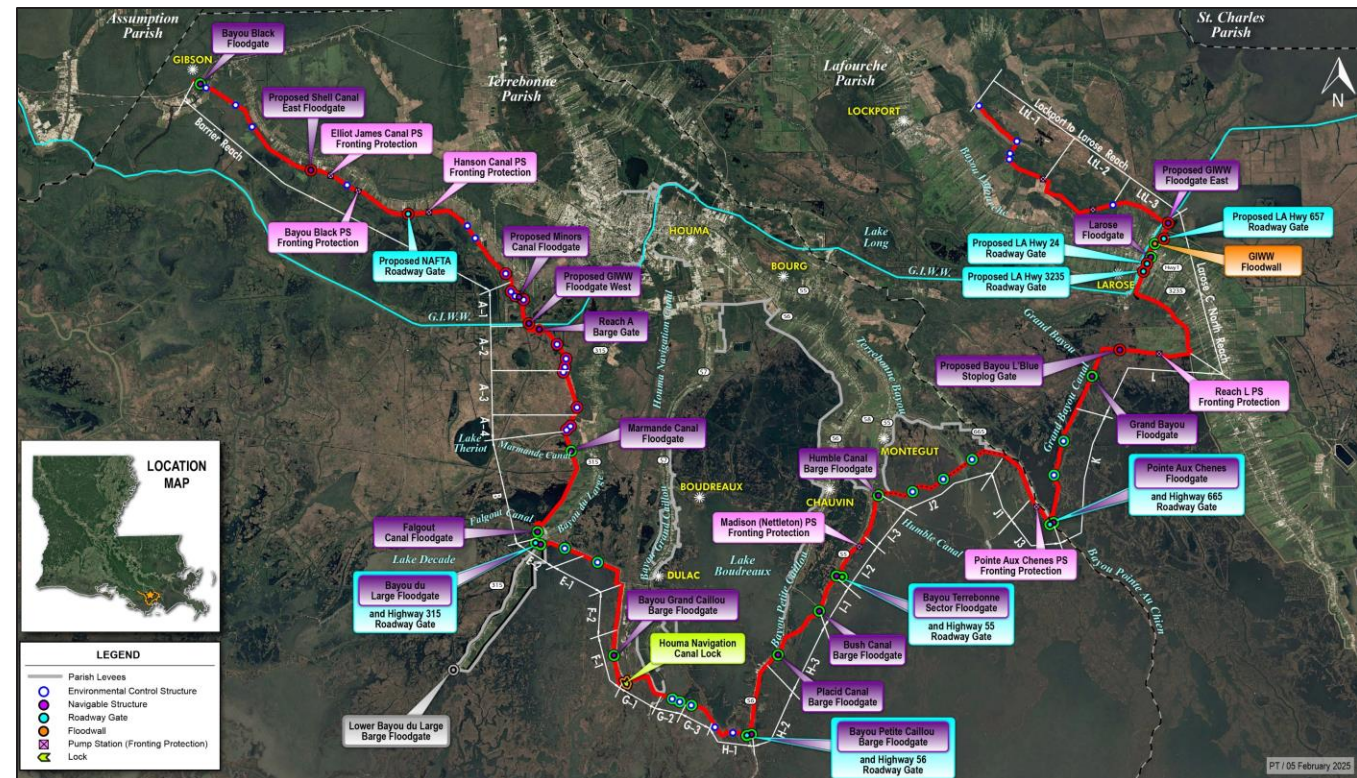

QUESTIONS?

