

RDC♦JPA ARCHITECTURE

DATE: 03/19/2025

Addendum No. 1

Renovate Interior Corridors Building #1 546-23-112

Miami VA

This Addendum supplements and amends the original Drawings and Specifications for the above referenced project. This Addendum shall be forwarded to all Prime Bidders and all appropriate building code authorities. This Addendum shall be taken into account in the preparation of bids and shall become a part of the Contract Documents.

Receipt of this Addendum must be acknowledged on the Form of Proposal.

This addendum consists of 8 Drawing sheets, responses to RFI's, and the environmental report.

General:

1. Responses to "Requests for Information" (RFI's)
2. Environmental report containing Asbestos Survey and Lead Paint. See attached H8227138 - VA Hospital - VAMC 2nd and 3rd Floor Corridors - Asbestos and Lead Report.

Specifications:

1. Painted Elevator cab doors:
 - a. Surface Preparation: Wash/clean all surfaces to be painted to remove all dirt, grease, chalk, loose paint and surface contaminates. Where a sheen is present on the existing coating, sand the existing paint finish to create a surface profile so the new coating can obtain proper mechanical adhesion. On ferrous metal surfaces remove all loose existing paint and corrosion by using SSPC-SP2 Hand Tool Cleaning and SSPC-SP3 Power Tool Cleaning.

Spot Prime Coat (bare ferrous metals and rusting areas only): B50WZ4
Kem Bond HS High Solids Alkyd Universal Metal Primer

RDC♦JPA

ARCHITECTURE

Spot Prime Coat (bare galvanized metals): B66W1310 Pro Industrial Pro-Cryl Universal Primer.

Two Finish Coats: B53W5251 Pro Industrial Waterbased Alkyd Urethane Enamel Low Sheen or B53W5151 Pro Industrial Waterbased Alkyd Urethane Enamel Semi-Gloss or B53W2051 Pro Industrial Waterbased Alkyd Urethane Enamel Gloss.

Drawings:

1. A201-N – NOTE PLAN – SECOND FLOOR
 - a. Added notes D & E to general notes
 - b. Revised keynotes
 - c. Added detail 2/ Wall section.
 - d. Added detail B/ Enlarged plan.
 - e. Added detail 3/ Wall section.
 - f. Added enlarged plan B/A201-N room: C2-6-1 on Note Plan.
 - g. Added enlarged plan A/A201-N rooms: C2-11-2, C2-6-1, C2-13-1 on Note Plan.
2. A202-N – NOTE PLAN – SECOND FLOOR
 - a. Added enlarged plan A/A201-N room: C2-13-1 on Note Plan.
 - b. Added enlarged plan B/A201-N room: C2-13-2 on Note Plan.
 - c. Deleted Keynote 9.20 room: C2-13-2 on Note Plan.
3. A203-N – NOTE PLAN – SECOND FLOOR
 - a. Added enlarged plans A/A201-N rooms: C2-2-1, C2-4A-1, C2-7-1 on Note Plan.
 - b. Added enlarged plan B/A201-N room: C2-6-1 on Note Plan.
4. A204-N – NOTE PLAN – SECOND FLOOR
 - a. Added enlarged plans A/A201-N rooms: C2-7-1, C2-28-1, C2-34-1 on Note Plan.
5. A205-N – NOTE PLAN – THIRD FLOOR
 - a. Added detail C/ Enlarged plan.
 - b. Revised detail 2/ Window type “C”.
 - c. Revised detail 3/ Head.
 - d. Revised detail 4/ Sill.
 - e. Revised detail 5/ Jamb.

RDC♦JPA

ARCHITECTURE

- f. Added detail 6/ Section.
 - g. Added detail 7/ Section.
 - h. Added enlarged plans A/A201-N rooms: C3-3-1, D312A, C3-13-1, C3-1-1 on Note Plan.
 - i. Added enlarged plans B/A201-N rooms: A300, C3-6-1 on Note Plan.
 - j. Added enlarged plan C/A205-N room: D312A on note plan.
- 6. A401 – INTERIOR ELEVATIONS
 - a. Elevations 1, 5, 9: Added signage tags, revised dimensions.
 - b. Elevations 3, 6, 7, 10, 11, 12, 13, 14, 15, 16, 18: Added signage tags.
 - c. Elevation 8: Revised dimensions & solid surface millwork width.
- 7. AF201-F – FLOOR FINISH PLAN – SECOND FLOOR
 - a. Added SS-1 (countertops & custom millwork) to interior finishes legend.
 - b. Added EG-1 (end guard) to interior finishes legend.
 - c. Added General signage notes & sign types.
- 8. AF201-W – WALL FINISH & PROTECTION PLAN – SECOND FLOOR
 - a. Moved details 4 & 5 to sheet A201-N.

End of Addendum No. [1]

GENERAL NOTES

- A. All wood blocking to be fire retardant.
B. All dimensions are taken to face of gypsum wallboard or unit masonry.
C. Contractor to patch miscellaneous holes, divets, or other imperfections in existing gypsum board walls as required for new finishes.
D. All existing stainless steel elevator cab doors are to be buffed, cleaned, & polished.
E. All existing painted elevator cab doors are to be repainted (P-1).

PLAN NOTES

- 2.08 Existing floor expansion joint with aluminum cover.
2.09 Existing access panel to remain. Paint per finish schedule.
2.59 Existing fire extinguisher cabinet to remain.
2.68 Existing AED cabinet
2.72 Remove and reinstall existing wall mounted Drop Box.
7.05 Existing wall expansion joint.
9.19 Existing door frames to be painted per finish legend.
12.0 Custom wall panel with signage.
8




GENERAL NOTES

- A. All wood blocking to be fire retardant.
B. All dimensions are taken to face of gypsum wallboard or unit masonry.
C. Contractor to patch miscellaneous holes, divets, or other imperfections in existing gypsum board walls as required for new finishes.
D. All existing stainless steel elevator cab doors are to be buffed, cleaned, & polished.
E. All existing painted elevator cab doors are to be repainted (P-1).

PLAN NOTES

- 2.08 Existing floor expansion joint with aluminum cover.
2.59 Existing fire extinguisher cabinet to remain.
2.68 Existing AED cabinet
7.05 Existing wall expansion joint.
12.08 Custom wall panel with signage.

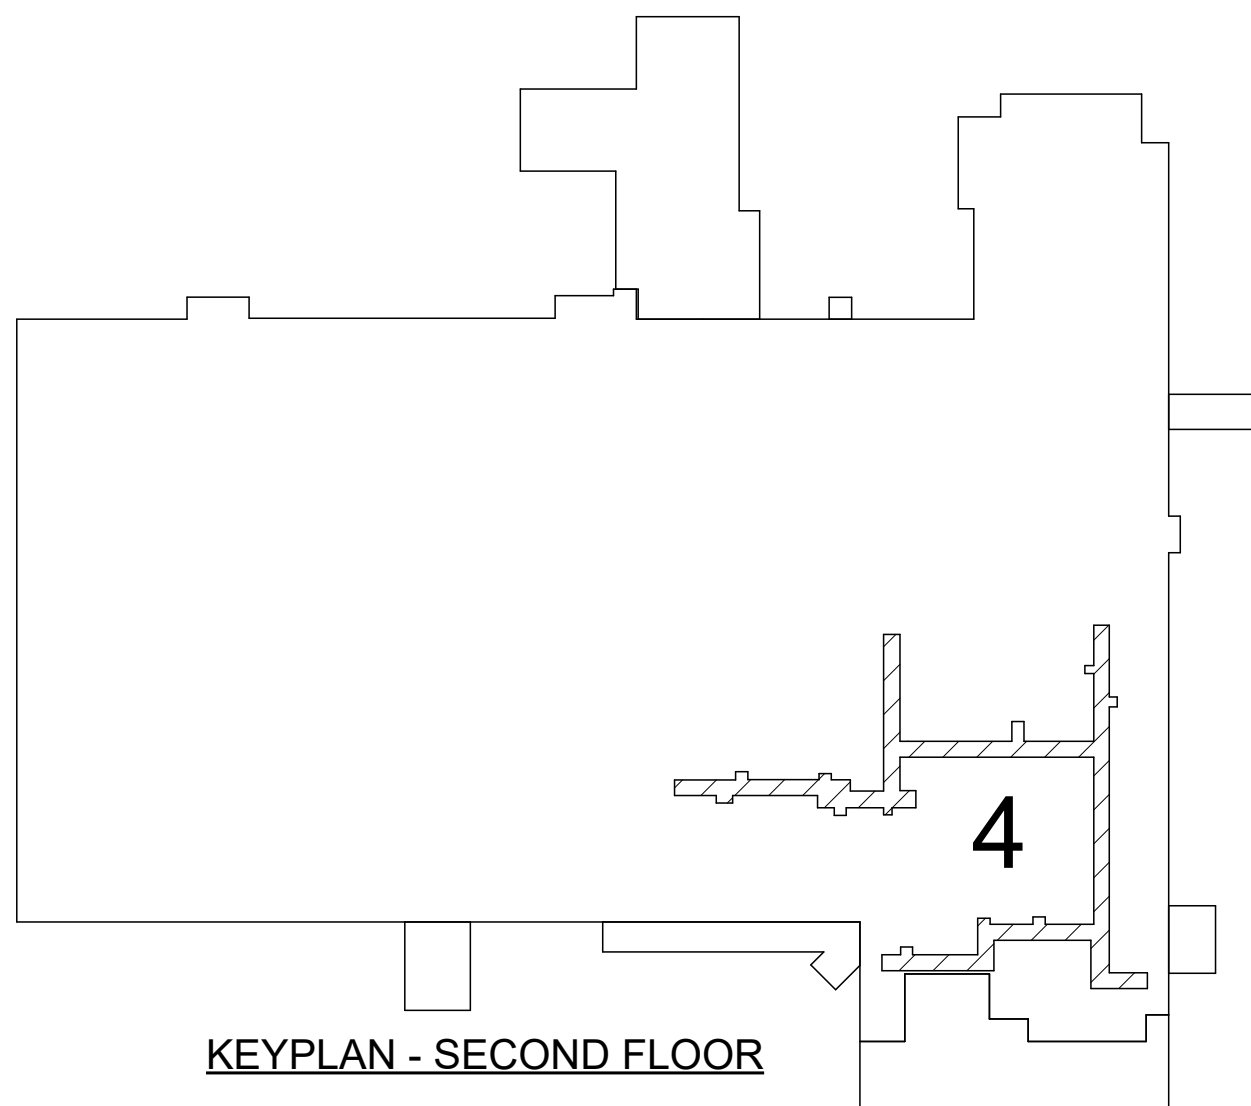

1

NOTE PLAN - SECOND FLOOR - ZONE 4

Scale: 3/32" = 1'-0"

Revisions	ADD #1	Date
1	ADD #1	3/19/2025


CONSULTANT

ARCHITECT/ENGINEER OF RECORD

RDC JPA
ARCHITECTURE

524 Fernwood Drive, Altamonte Springs, Florida 32701 | www.rdcjpa.com | 800.362.1523

STAMP

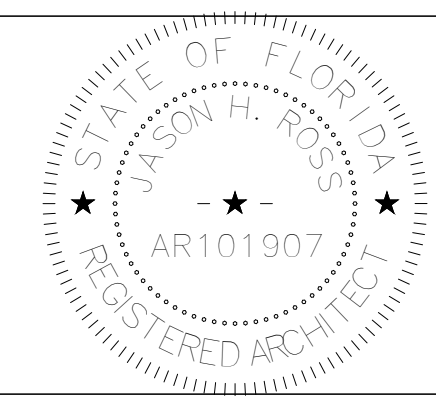

Office of
Construction
and Facilities
Management

VA U.S. Department
of Veterans Affairs

Drawing Title

NOTE PLAN - SECOND FLOOR

Approved:

MATTHEW KING

Phase

100% CONSTRUCTION
DOCUMENTS

FULLY SPRINKLERED

Project Title

VA Miami Renovate Interior
Corridors Building 1

Location

VAMC Miami, Florida

Issue Date

09/29/2023

Checked

SO

Drawn

JW

Project Number

VA Project No. 546-23-112
RDC/JPA Project No. 23061.00

Building Number

1

Drawing Number

A204-N



GENERAL NOTES


- A. All wood blocking to be fire retardant.
- B. All dimensions are taken to face of gypsum wallboard or unit masonry.
- C. Contractor to patch miscellaneous holes, divets, or other imperfections in existing gypsum board walls as required for new finishes.
- D. All existing stainless steel elevator cab doors are to be buffed, cleaned, & polished.
- E. All existing painted elevator cab doors are to be repainted (P-1).

PLAN NOTES

- 2.08 Existing floor expansion joint with aluminum cover.
- 2.09 Existing access panel to remain. Paint per finish schedule.
- 2.25 Existing fire extinguisher cabinet to remain.
- 2.26 Existing medical gas cabinet.
- 6.01 2" x 4" wood blocking.
- 6.03 2" x 4" wood blocking.
- 6.09 Wood shim.
- 6.21 Metal drywall 90 degree corner bead. Basis of design: fry right leg - dmb31875
- 6.30 Solid surface (ss-) over 3/4" plywood substrate.
- 6.32 Solid surface (ss-) over 3/4" plywood substrate with 1/4" eased edge, 4" backspalls/displayslashes.
- 6.33 In-wall support bracket. Install brackets every 48".
- 7.05 Existing wall expansion joint.
- 7.06 Aluminum wall expansion joint.
- 7.81 Continuous sealant over backer rod.
- 8.26 [4-1/2"] Aluminum storefront window system.
- 8.51 Tempered glass. MG-1
- 9.02 3 5/8" non-structural metal framing @ 16" o.c.
- 9.19 Existing door frames to be painted per finish legend.
- 9.20 Paint existing elevator doors.
- 9.21 5/8" Type X gypsum board.
- 9.06 Resilient base. See Room Finish Schedule.
- 12.08 Custom wall panel with signage.

Section

Scale: 1/2" = 1'-0"

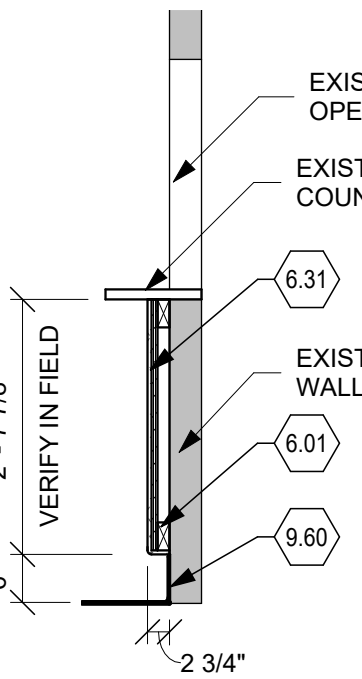


Section

Scale: 1/2" = 1'-0"


NOTE PLAN - THIRD FLOOR

Scale: $3/32" = 1'-0"$

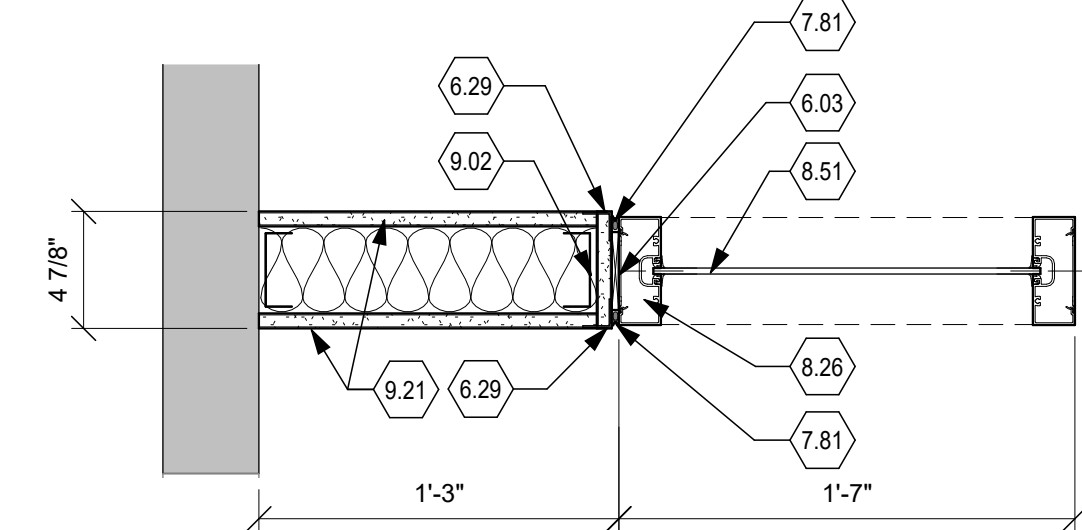


5 JAMB

Scale: 1 1/2" = 1'-0"

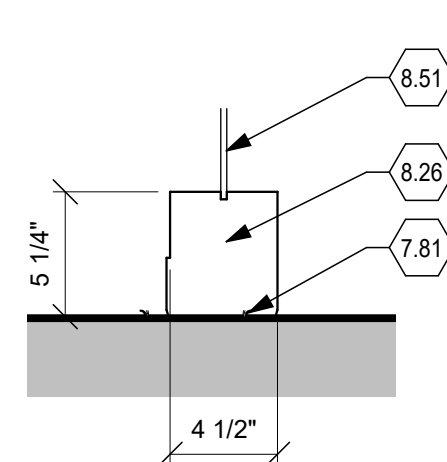


4 SILL

Scale: 1 1/2" = 1'-0"

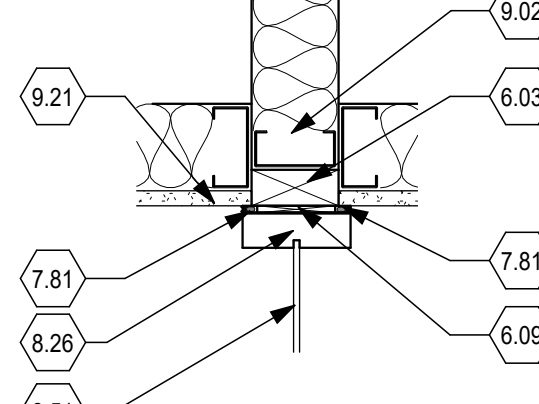


2 HEAD

Scale: 1 1/2" = 1'-0"

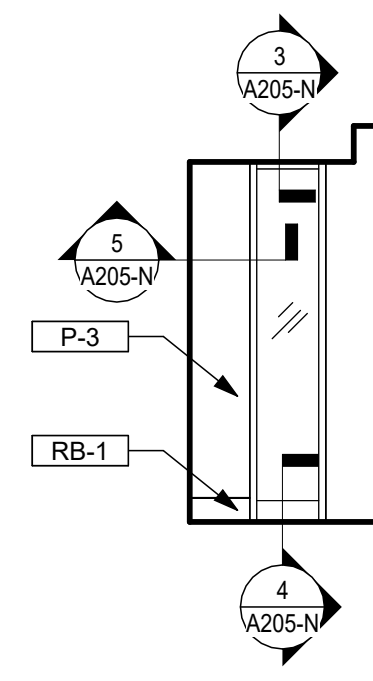


WINDOW TYPE "C"

Scale: 1/4" = 1'-0"

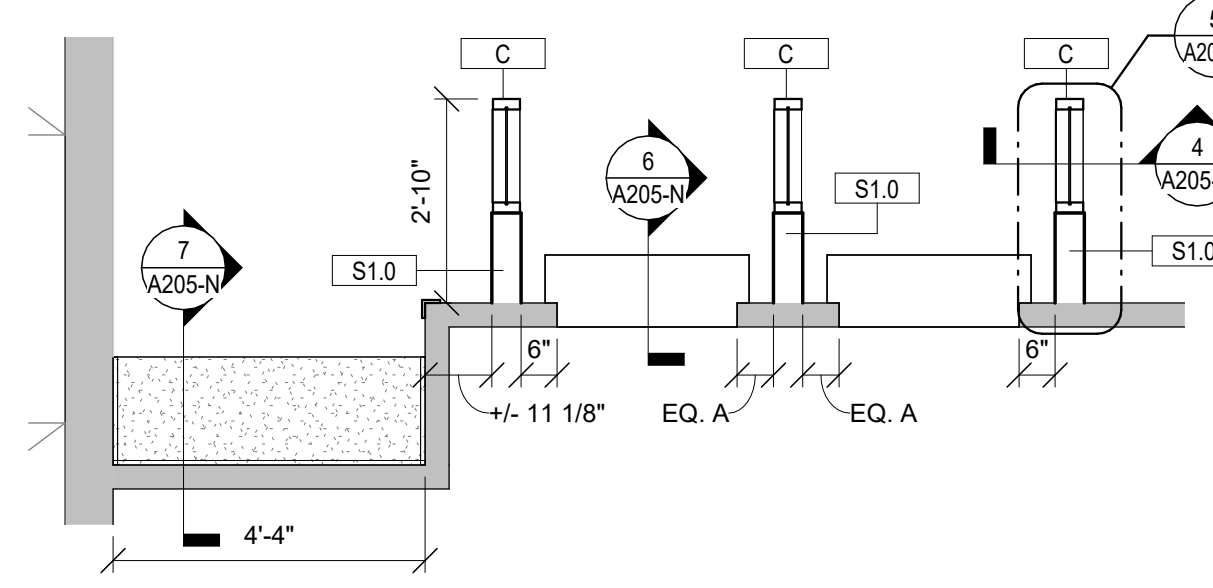


Enlarged Plan

Scale: $3/8" = 1'-0"$

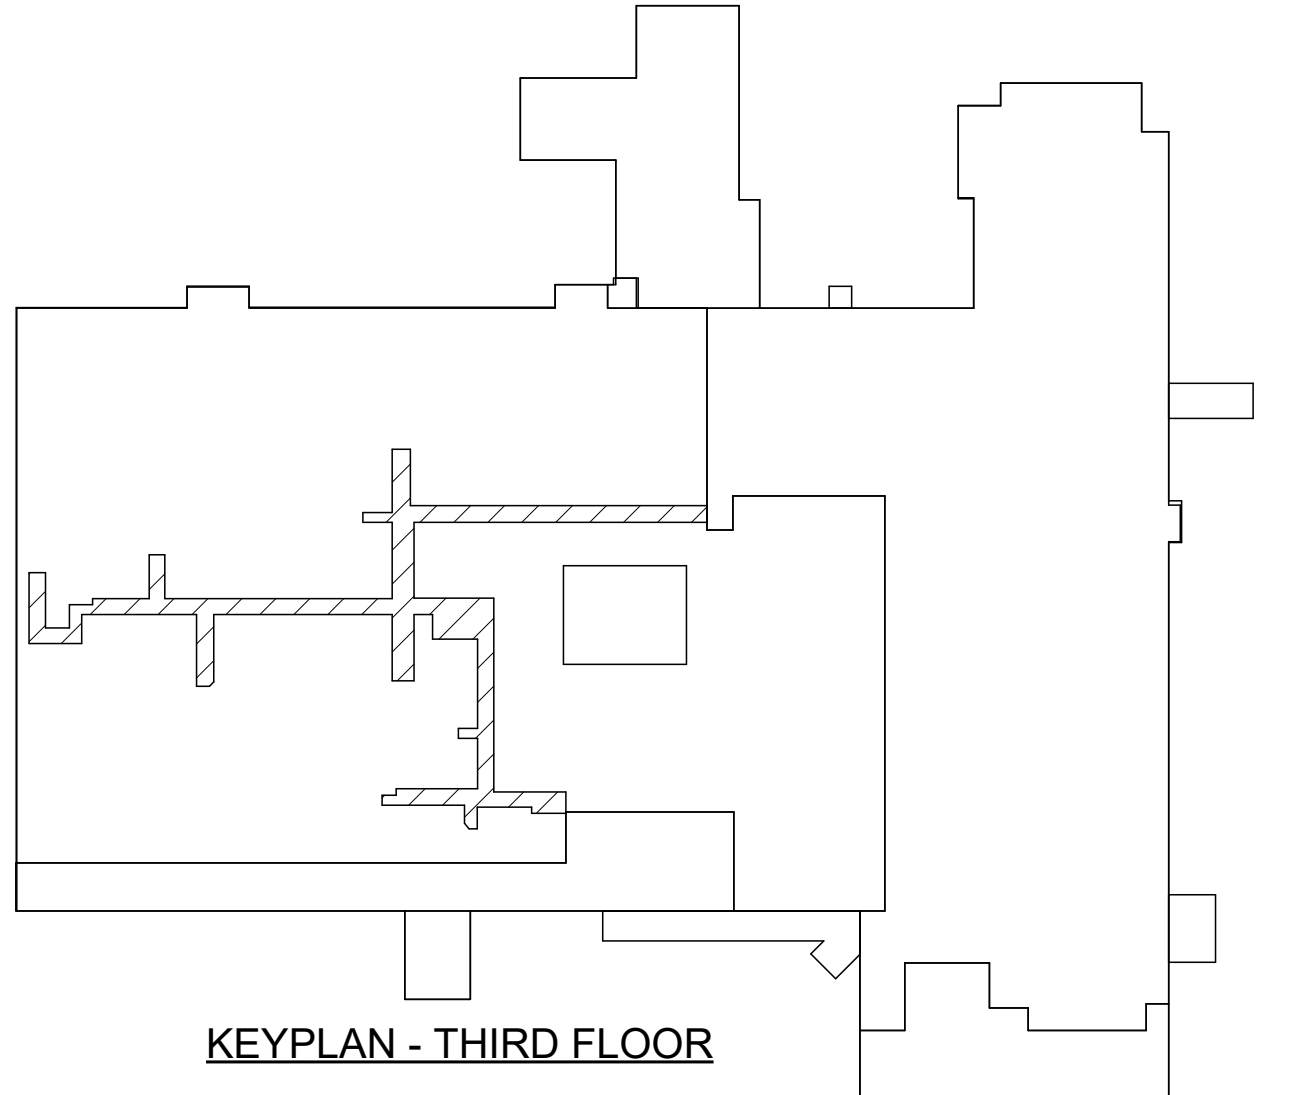


KEYPLAN - THIRD FLOOR


[illegible]

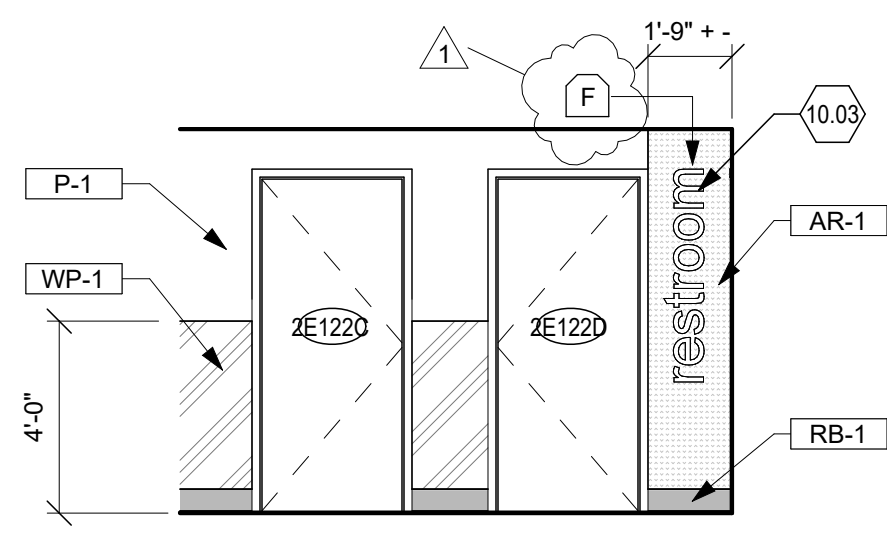


16 2E122 & 2E123
Scale: 1/4" = 1'-0"

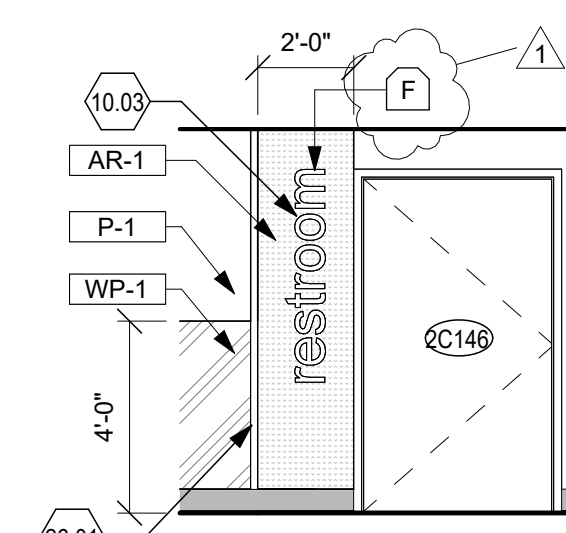


15 2C146
Scale: 1/4" = 1'-0"

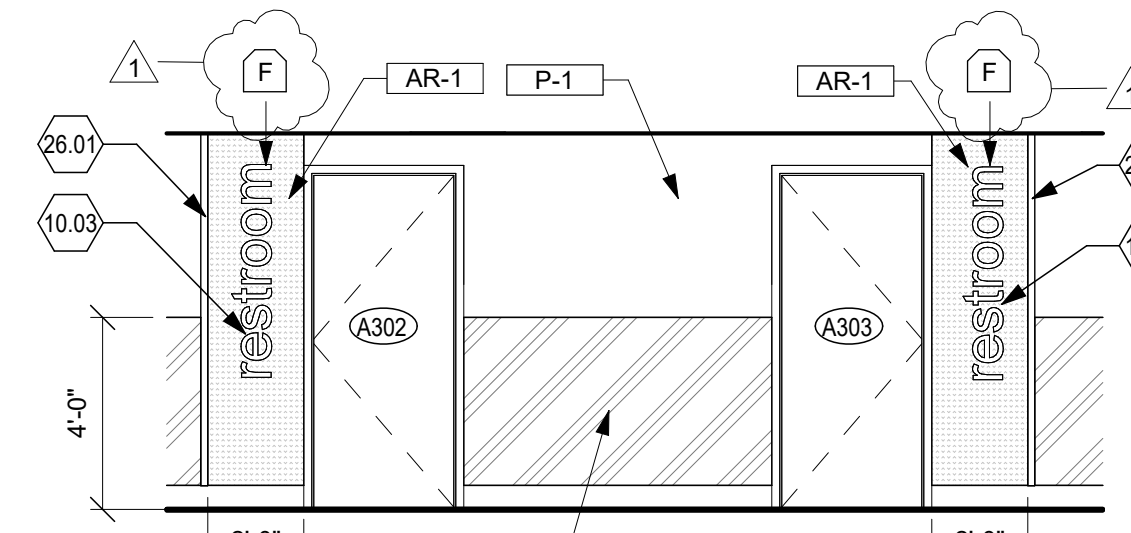

14 A302
Scale: 1/4" = 1'-0"

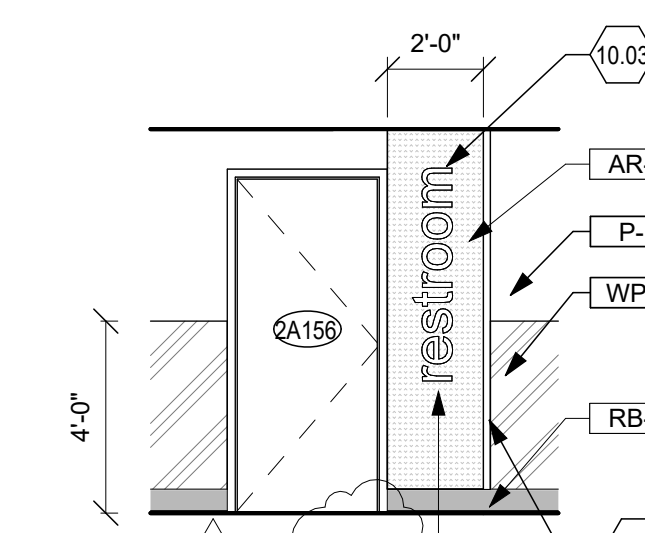


13 2A156
Scale: 1/4" = 1'-0"

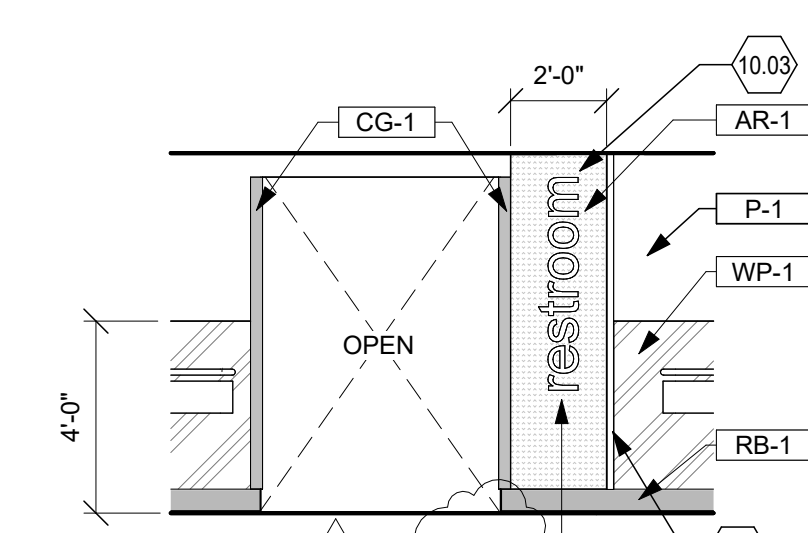


12 B201 & B202
Scale: 1/4" = 1'-0"

- SYMBOL LEGEND**
- (X) Toilet Accessory
 - (X) Equipment
 - (X) Signage
 - (?) Keynote
 - (?) Material Finish


- ELEVATION NOTES**
- 2.64 Demount existing surface conduit and junction. Reinstall after installation of new finishes. See electrical drawings.
 - 2.72 Remove and reinstall existing wall mounted Drop Box.
 - 2.77 Existing elevator call panel.
 - 2.78 Existing elevator floor indicator sign.
 - 2.79 Existing access panel.
 - 8.63 Contractor to provide window film (WF-1) to existing storefront glazing. Refer to finish legend for window film details.
 - 10.03 Acrylic signage provided by contractor.
 - 10.04 Wall mounted slide display system provided by contractor, printed signage provided by owner. Basis of design: alumina designs, vetro slide displays, clear acrylic w/ sleeve, standoff mounts.
 - 12.05 Wall mounted tv monitor.
 - 22.01 Plumbing fixture. See Plumbing Drawings.
 - 26.01 Light fixture. See Electrical Drawings.

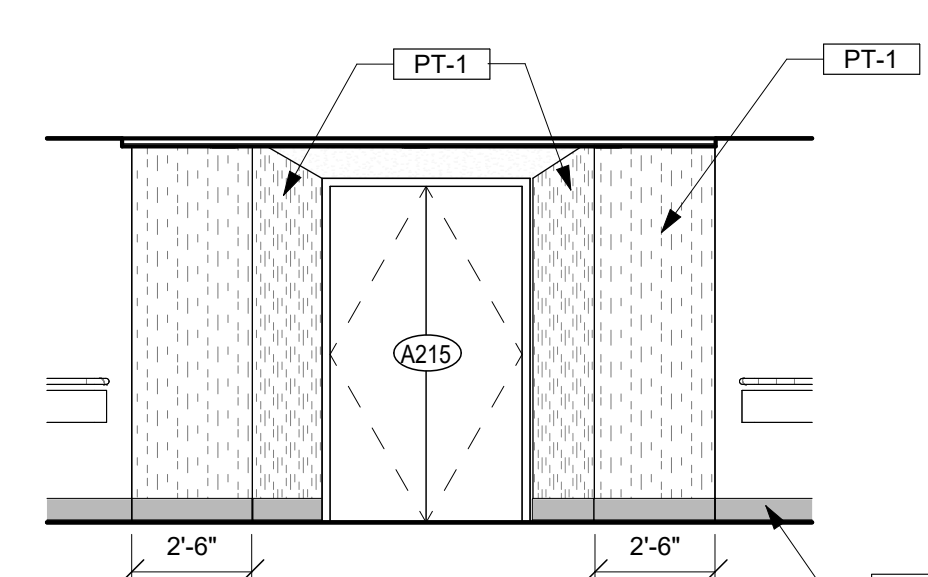


17 A215
Scale: 1/4" = 1'-0"

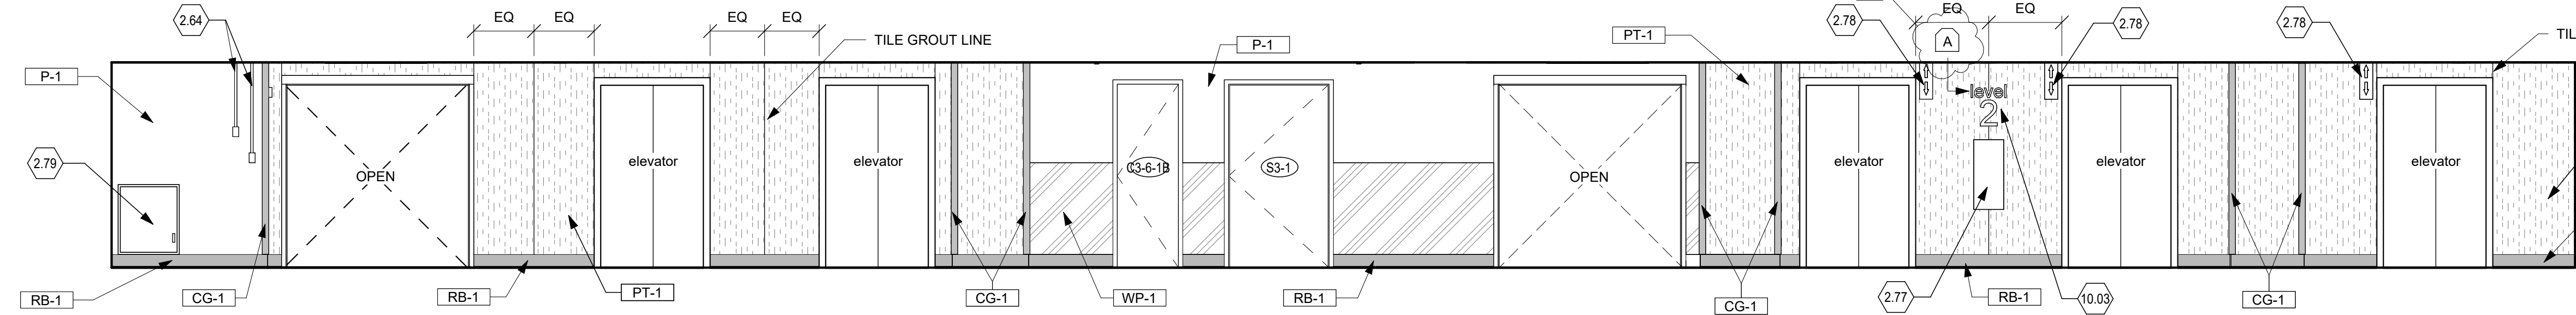


11 CORRIDOR C3-6-1 EAST
Scale: 1/4" = 1'-0"

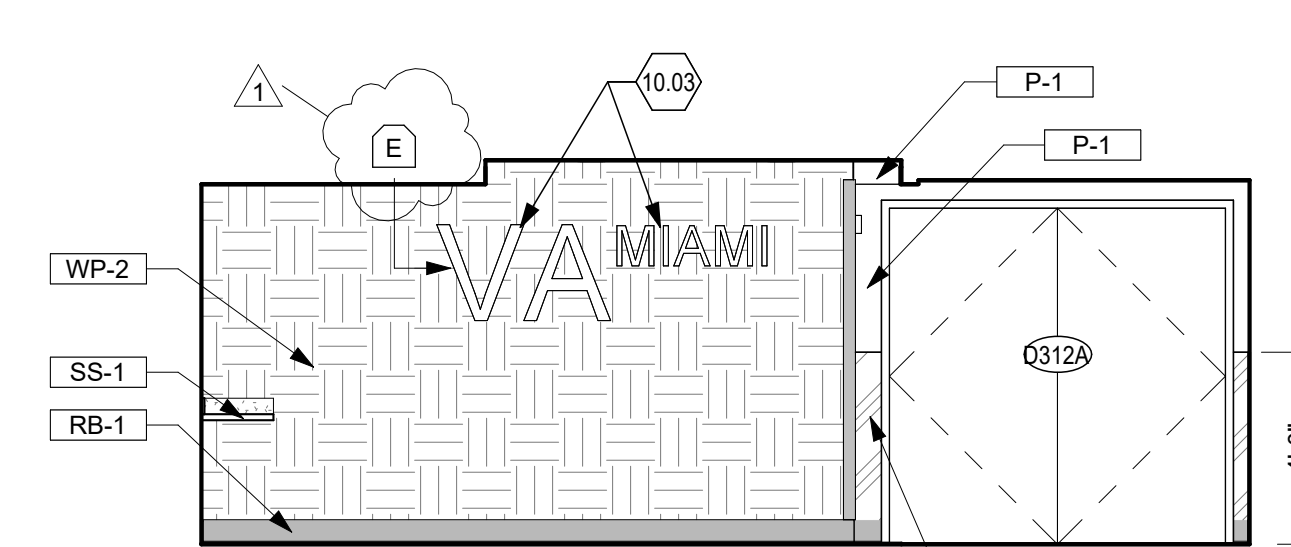


18 D312A - WEST
Scale: 1/4" = 1'-0"

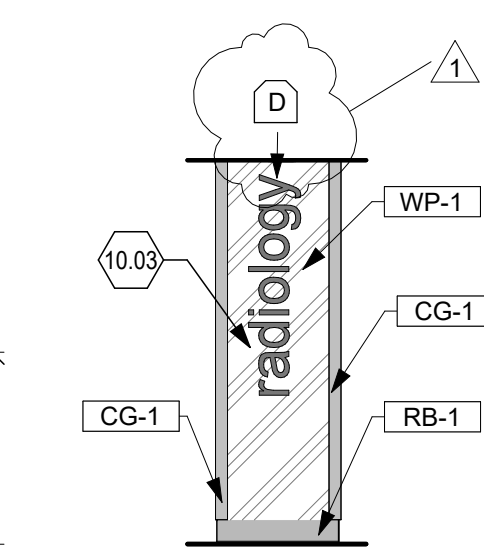


10 D312A - NORTH
Scale: 1/4" = 1'-0"

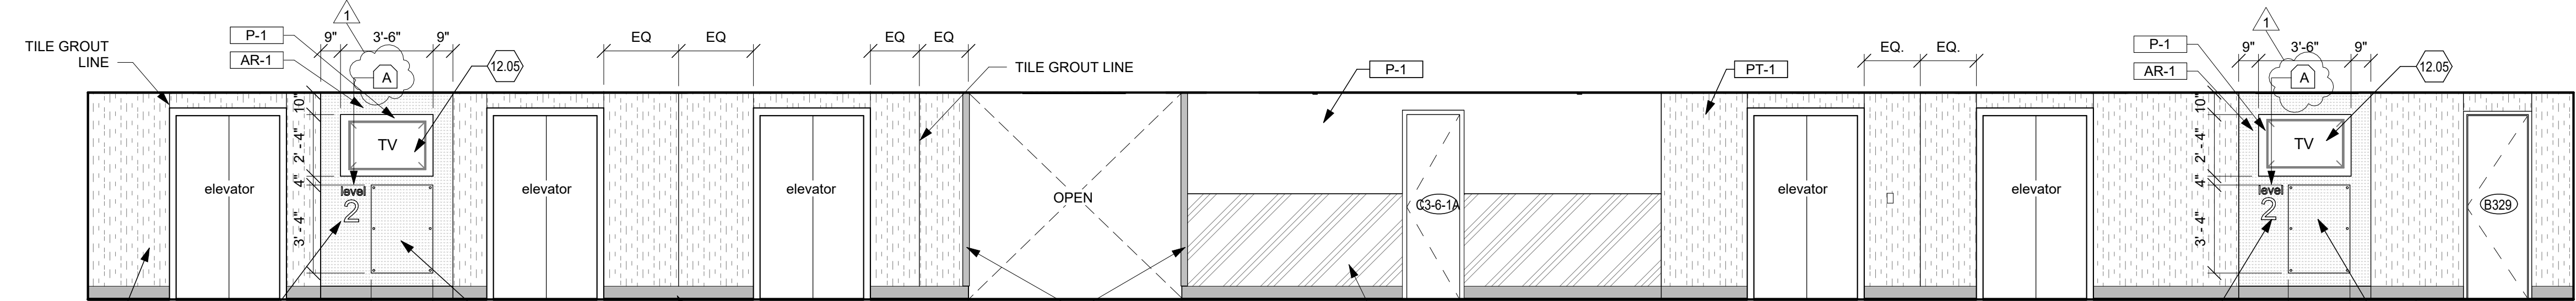


9 CORRIDOR C3-6-1 WEST
Scale: 1/4" = 1'-0"

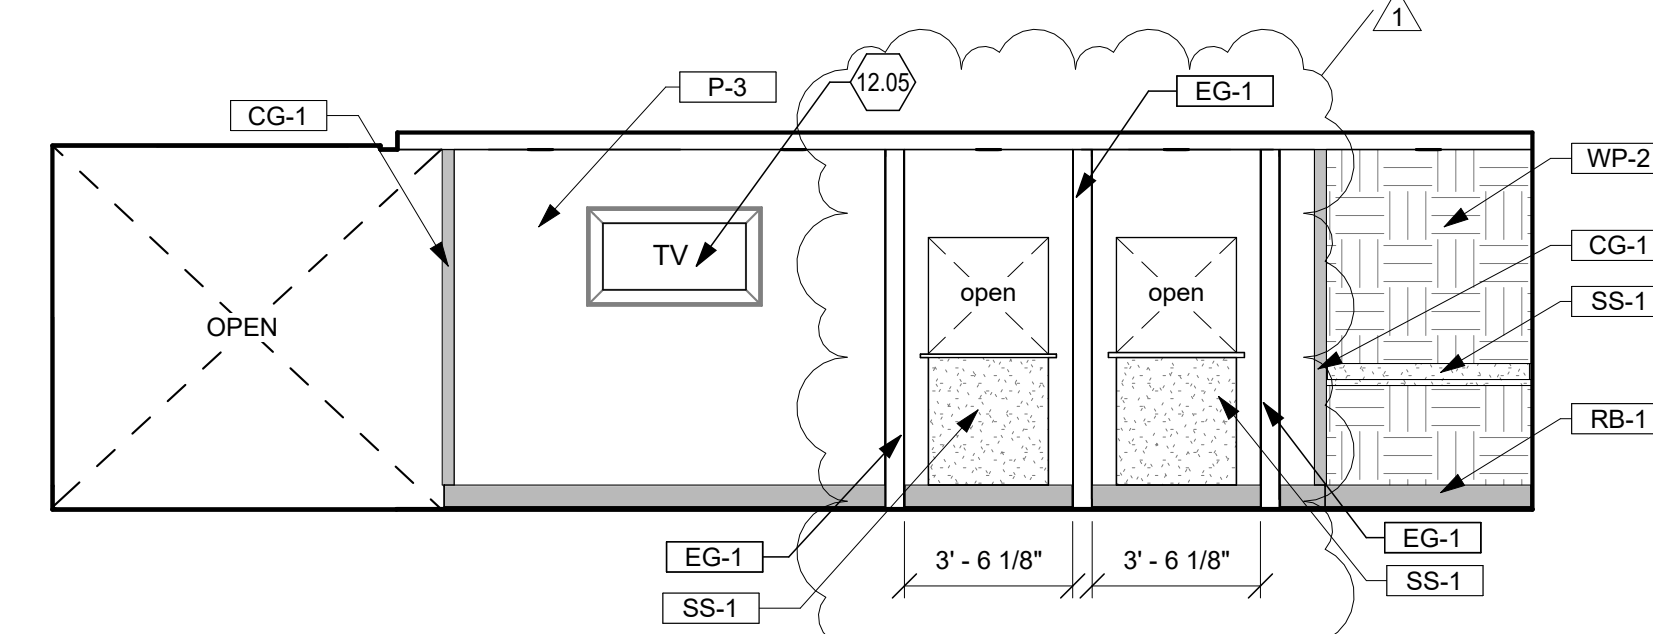


8 D312A - SOUTH
Scale: 1/4" = 1'-0"

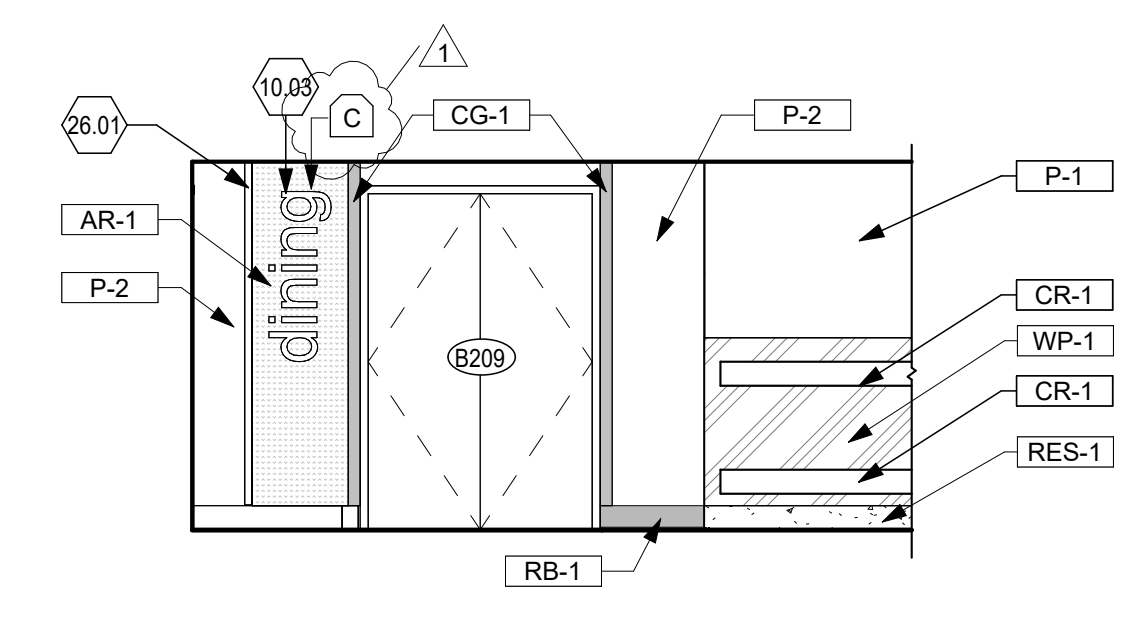


7 B209
Scale: 1/4" = 1'-0"

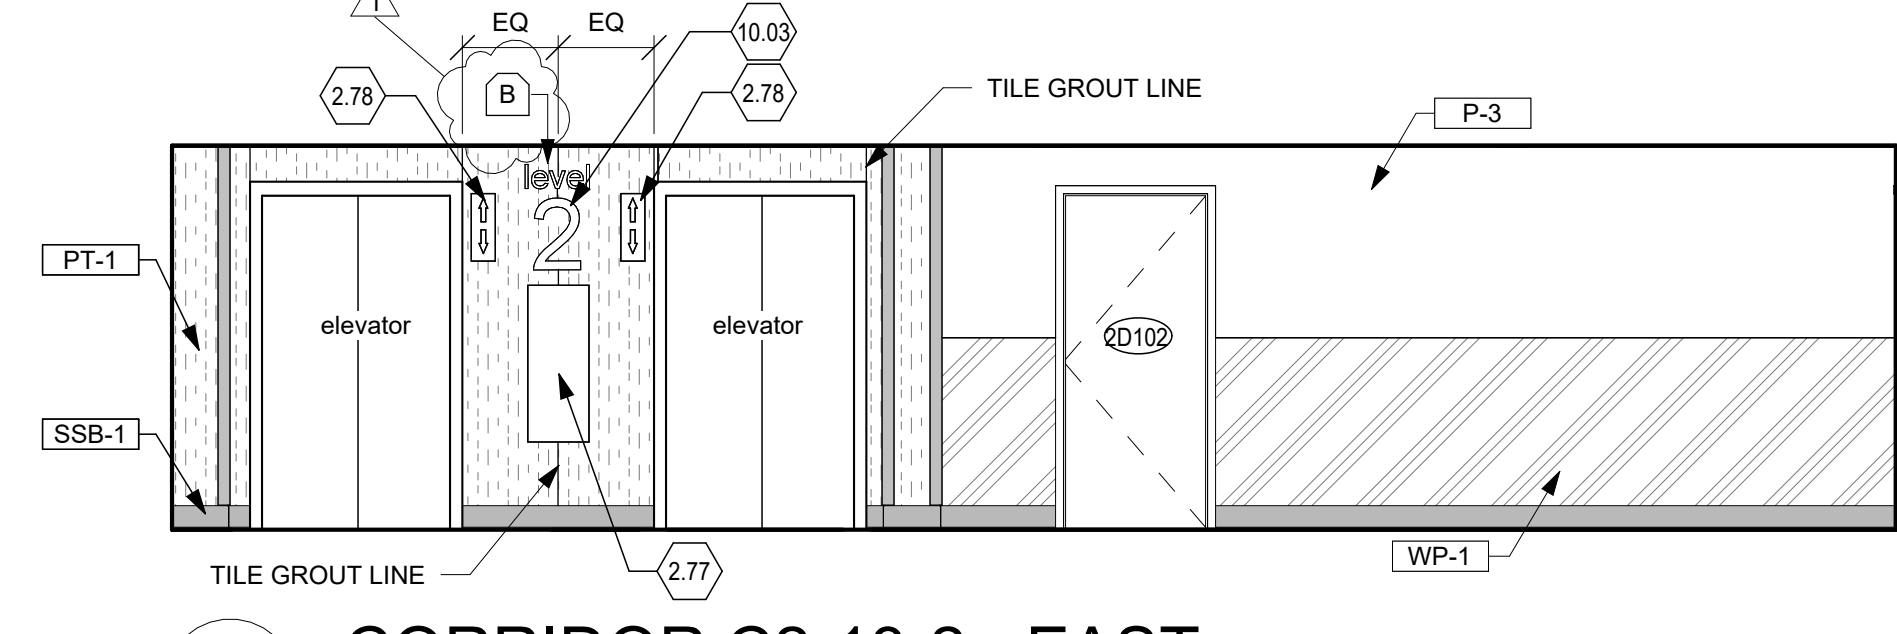


6 CORRIDOR C2-13-2 - EAST
Scale: 1/4" = 1'-0"

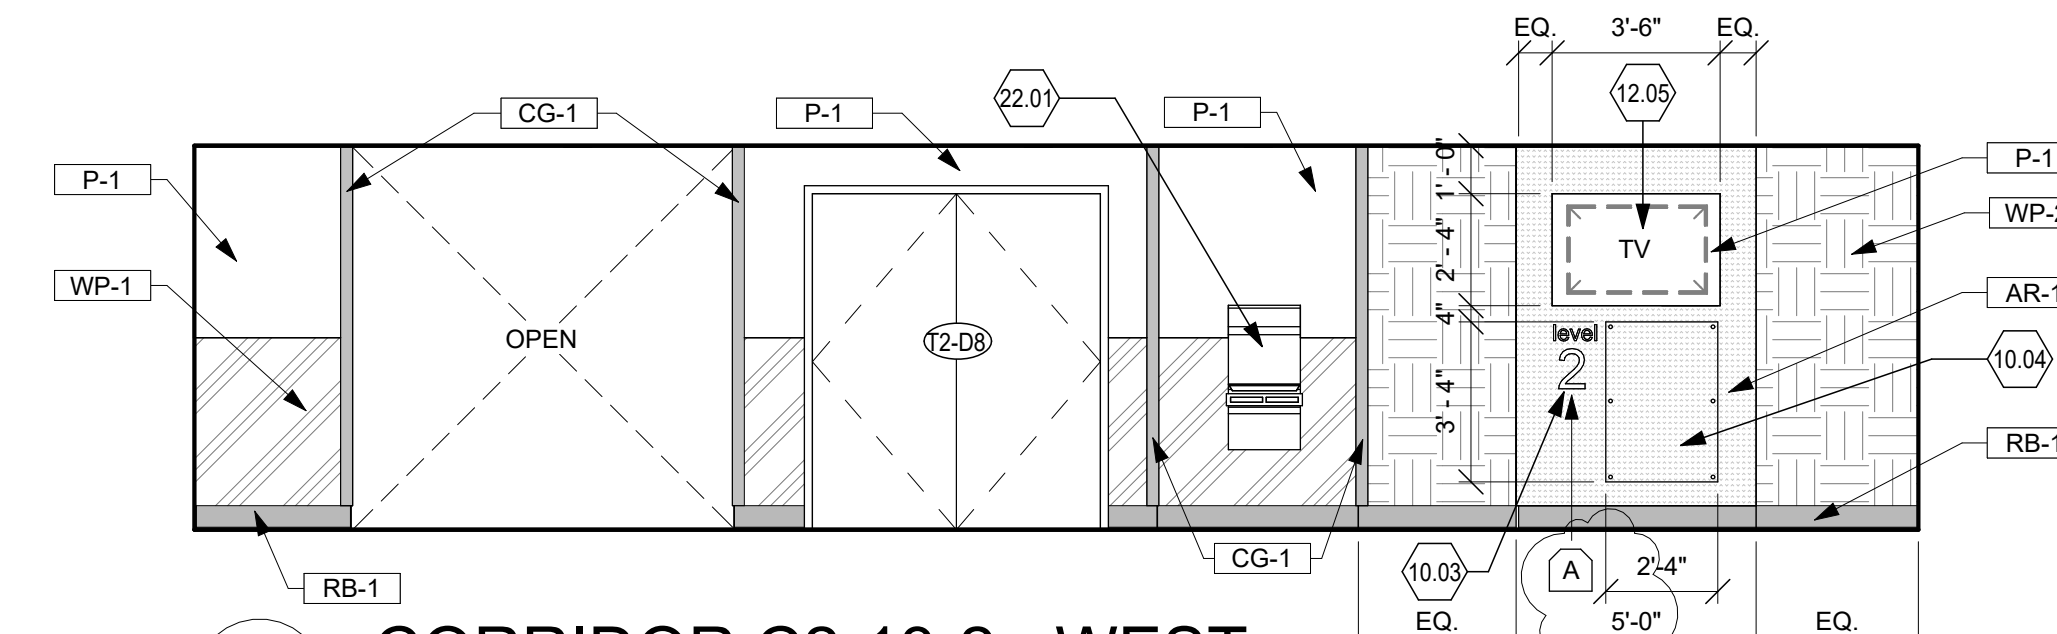


5 CORRIDOR C2-13-2 - WEST
Scale: 1/4" = 1'-0"

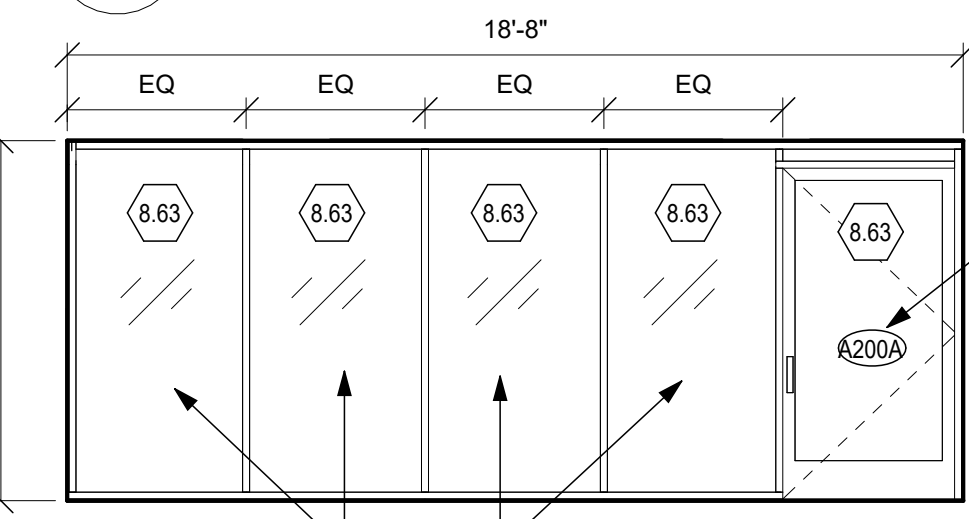


4 A200
Scale: 1/4" = 1'-0"

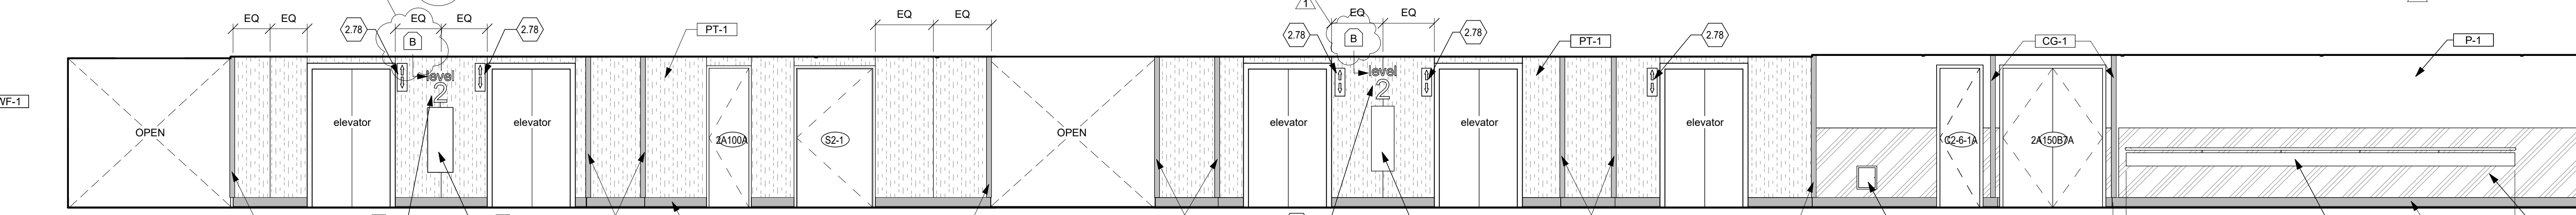

3 CORRIDOR C2-6-1 - EAST
Scale: 1/4" = 1'-0"

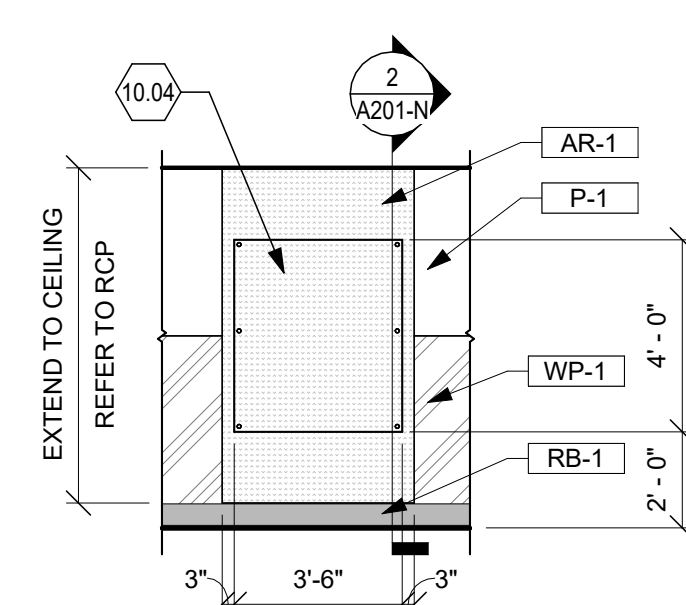

2 SIGNAGE TYP.
Scale: 1/4" = 1'-0"

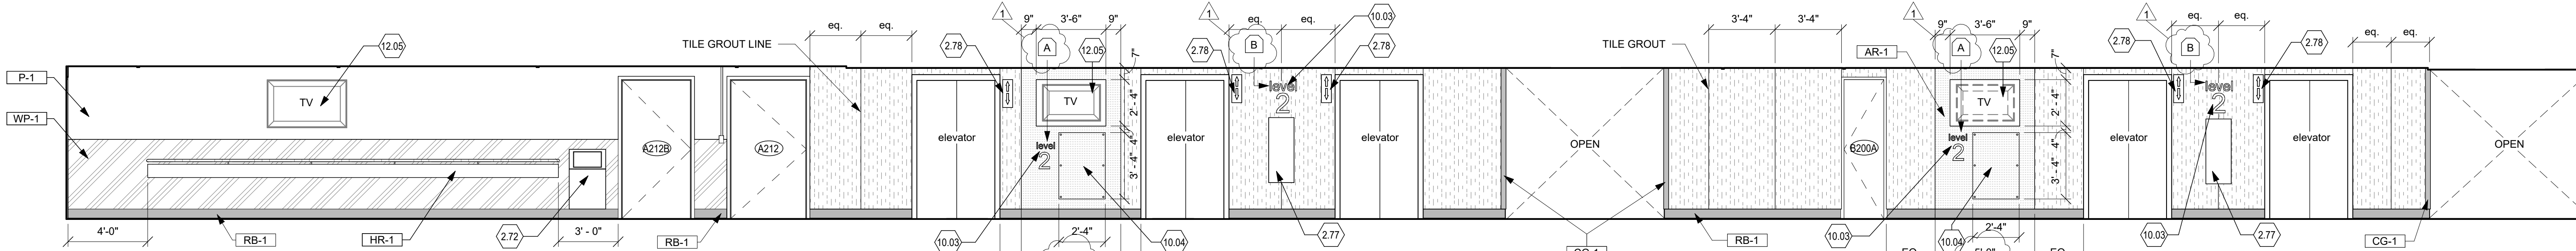

1 CORRIDOR C2-6-1 - WEST
Scale: 1/4" = 1'-0"

CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title		Phase		Project Title		Project Number	
		RDC JPA ARCHITECTURE		[Stamp]		VA U.S. Department of Veterans Affairs		INTERIOR ELEVATIONS		100% CONSTRUCTION DOCUMENTS		VA Miami Renovate Interior Corridors Building 1		VA Project No. 546-23-112 RDC/JPA Project No. 23061.00	
		524 Fernwood Drive, Altamonte Springs, Florida 32701 www.rdcjpa.com 800.362.1523						Approved: MATTHEW KING		FULLY SPRINKLERED		Location		Drawing Number	
												VAMC Miami, Florida		A401	
												Issue Date		Checked	
												09/29/2023		SO	
												Drawn		NH	

A

B

C

D

E

F

A

B

C

D

E



F

GENERAL FINISH PLAN NOTES

- A. Provide resilient or metal transition strip at all flooring material junctures. Material transitions, where applicable, occur at center of door panel. Refer to details for typical floor material transitions. Color selected by architect from manufacturers full range of colors.
- B. Paint underside and faces of bulkheads (P-5); unless noted otherwise.
- C. All hollow metal doors and frames to be painted (P-4).
- D. All exposed mechanical grilles, diffusers, metal panels, and trim devices shall be painted to match adjacent wall finish.
- E. Coordinate the installation of handrails and crash rails with existing wall framing.
- F. All walls to be painted (P-1); unless noted otherwise. Confirm accent paint color and location with architect in field before proceeding with finish work.
- G. Provide metal edge trim where wall tile meets wall base and ceilings.
- H. All walls shall receive rubber wall base (RB-1), unless noted otherwise.
- J. All walls in project scope shall receive 4H rigid vinyl wall protection (WP-1); unless noted otherwise.

INTERIOR FINISHES LEGEND

- ACOUSTICAL CEILING TILE**
TAG: ACT-1
MFG: ARMSTRONG
SERIES: 2822 - CALLA SQUARE TEGULAR
SIZE: 24" X 24" X 1"
GRID: 15/16" PRELUDE
COLOR: WHITE - SMOOTH TEXTURE
- ACOUSTICAL WOOD CEILING**
TAG: AWC
MFG: ARMSTRONG
SERIES: 6480 - WOODWORKS VECTOR - UNPENETRATED
SIZE: 12" X 48" X 3/4"
COLOR: NATURAL VARIATIONS - WALNUT
- RESILIENT TILE FLOORING**
TAG: LVT-1
TYPE: LUXURY VINYL TILE
MFG: PATCRAFT
STYLE: WITHDRAW
SIZE: 12" X 24"
THICKNESS: 5MM
COLOR: UNBLEACHED TITA
INSTALLATION: ERICK
- RESILIENT TILE FLOORING**
TAG: LVT-2
TYPE: LUXURY VINYL TILE
MFG: PATCRAFT
STYLE: EMERGE
SIZE: 9" X 36"
THICKNESS: 5MM
COLOR: REFINE
INSTALLATION: ERICK
- RESILIENT BASE & ACCESSORIES**
TAG: RB-1
TYPE: RUBBER WALL BASE
MFG: TARKETT-JOHNSONITE
STYLE: TIGHTLOCK
SIZE: 6"H
COLOR: 121 CEMENT
- TERRAZZO TILE FLOORING**
TAG: TER-1
MFG: FLOORAZZO
SIZE: 24" X 24"
COLOR: GLACIER
- TERRAZZO TILE FLOORING**
TAG: TER-2
MFG: FLOORAZZO
SIZE: 24" X 24"
COLOR: FOSSIL
- RESINOUS FLOORING SYSTEM**
TAG: RES-1
TYPE: DECORATIVE FLAKE FLOORING SYSTEM
SYSTEM: STONETEC - ERF
FLAKE: 1/8"
COLOR: SANTA CRUZ
FINISH: ORANGE PEEL
- COUNTERTOPS & CUSTOM MILLWORK**
TAG: SS-1
TYPE: SOLID SURFACE
MFG: WILSONART
COLOR: COCONUT OIL
- INTERIOR PAINTS**
TAG: P-1 (FIELD WALLS)
MFG: SHERWIN WILLIAMS
COLOR: TBD
- INTERIOR PAINTS**
TAG: P-2 (ACCENT WALL)
MFG: SHERWIN WILLIAMS
COLOR: TBD
- INTERIOR PAINTS**
TAG: P-3 (ACCENT WALL)
MFG: SHERWIN WILLIAMS
COLOR: TBD
- INTERIOR PAINTS**
TAG: P-4 (HOLLOW METAL DOORS/FRAMES)
MFG: SHERWIN WILLIAMS
COLOR: TBD
- WALL PROTECTION**
TAG: CG-1 (CORNER GUARD)
MFG: CONSTRUCTION SPECIALTIES
TYPE: ACO-8 STAINLESS STEEL
WING: 3 1/2"
SIZE: FULL HEIGHT
- WALL PROTECTION**
TAG: HR-1 (HANDRAILS)
MFG: CONSTRUCTION SPECIALTIES
SERIES: P-RAWSS PLATFORM SERIES - WOOD
GRIP: ROUND ACROVYN
GRIP COLOR: 1604 DRAMA NEW OAK
HANDRAILS/END CAPS: STAINLESS STEEL
- WALL PROTECTION**
TAG: CR-1 (CRASHRAILS)
MFG: CONSTRUCTION SPECIALTIES
SERIES: ECR-60S STAINLESS STEEL
SIZE: 6"H
- WALL PROTECTION**
TAG: WP-1 (RIGID SHEET VINYL)
MFG: CONSTRUCTION SPECIALTIES
THICKNESS: 0.040
SIZE: 4' X 8'
COLOR: DRIFTWOOD
- WALL PROTECTION**
TAG: WP-2 (RIGID SHEET VINYL)
MFG: CONSTRUCTION SPECIALTIES
TYPE: ACROVYN BY DESIGN
THICKNESS: 0.040
SIZE: 4' X 8'
NOTE: CUSTOM GRAPHIC
- WALL PROTECTION**
TAG: EG-1 (END GUARD)
MFG: CONSTRUCTION SPECIALTIES
TYPE: SC0-8 STAINLESS STEEL
WING: 3 1/2"
SIZE: FULL HEIGHT
- PORCELAIN TILE PANELS**
TAG: PT-1
MFG: CROSSVILLE
COLLECTION: LAMINAM
PATTERN: NATURALI PIETRA DI SAVOIA
COLOR: PERLA
SIZE: 120" X 40"
THICKNESS: 3MM
- WINDOW FILM**
TAG: WF-1
MFG: SKYLINE DESIGN
PATTERN: SHEER 1 - OPTION E - DIGITAL
PRINTING - VITRACOLOR
TRANSPARENCY: OPAQUE
- ACRYLIC RESIN**
TAG: AR-1
MFG: 3-FORM
TYPE: VARIA
THICKNESS: 1/4"
COLOR: TBD
FINISH: SAND
BACKER: WHITE OUT

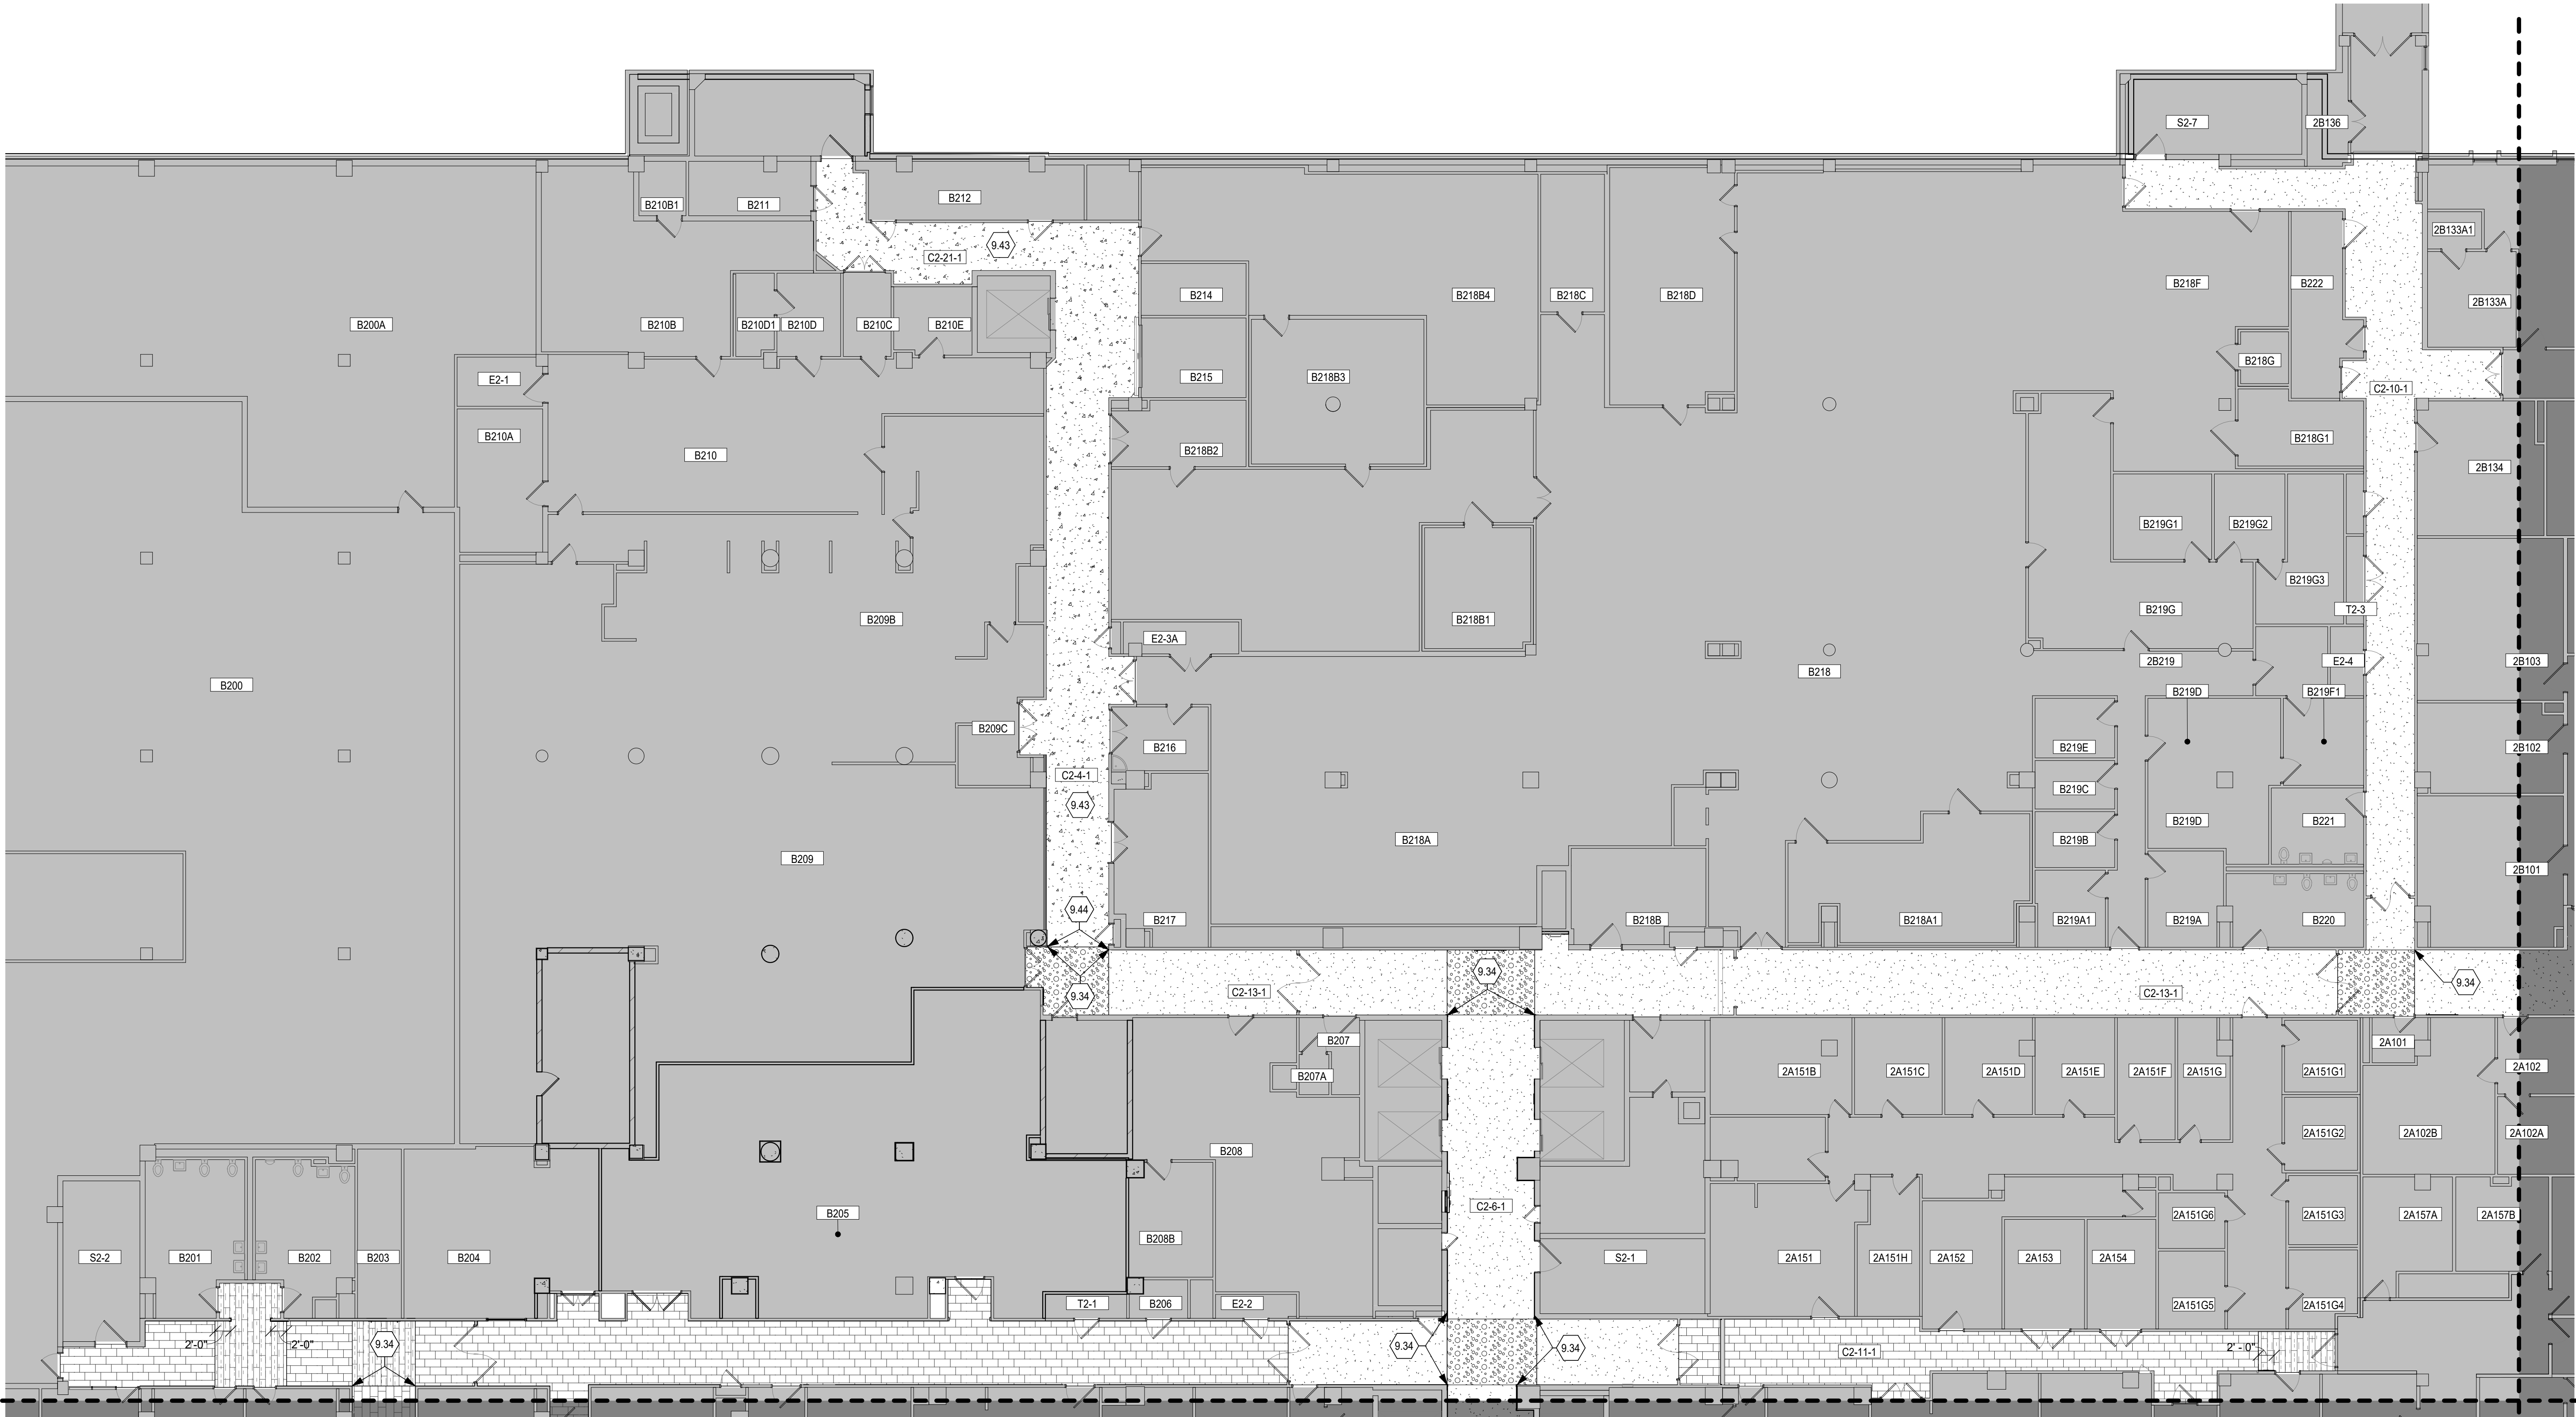

FLOOR FINISH PLAN - SECOND FLOOR - ZONE 1

Scale: 3/32" = 1'-0"

GENERAL SIGNAGE NOTES:

MATERIAL: Acrylic lettering & numbering
THICKNESS: 3/16" thick
MOUNTING: Directly mounted to substrate with double face tape
COLOR: White; unless noted otherwise.
FONT: Arial
SIZE: Varies; Refer to sign types below.

SIGN TYPE A: Lettering - 4"H
Numbering - 10"H
Orientation: Horizontal


SIGN TYPE B: Lettering - 6"H
Numbering - 12"H
Orientation: Horizontal

SIGN TYPE C: Lettering - 12"H
Orientation: Vertical

SIGN TYPE D: Lettering - 10"H
Orientation: Vertical
Note: Color to be custom to match Acrylic resin (AR-1) wall panels.

SIGN TYPE E: (VA) Lettering - 24"H
(Miami) Lettering - 10"H
Orientation: Horizontal

SIGN TYPE F: Lettering - 10"H
Orientation: Vertical

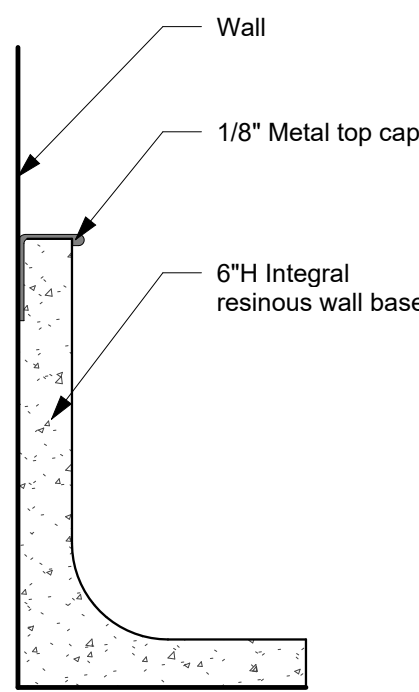


Resinous Wall base detail

Scale: N.T.S.

PLAN NOTES

- 9.34 Align floor pattern with adjacent wall.
- 9.43 Provide 6" integral resinous wall base (RES-1). Provide metal top cap.
- 9.44 Wall base shall transition from integral terrazzo to integral resinous at outside corner of wall.

FLOOR FINISH PATTERNS LEGEND

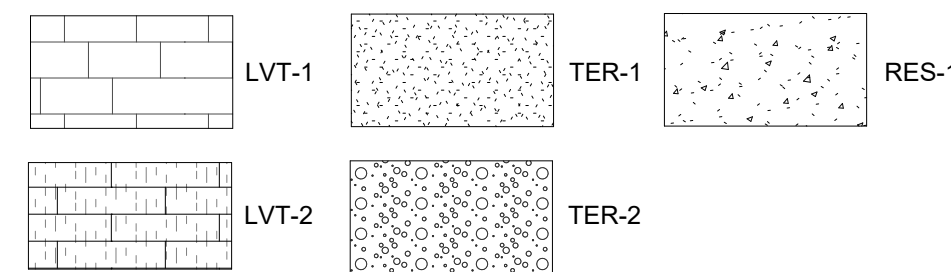

CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP	Office of Construction and Facilities Management	Drawing Title FLOOR FINISH PLAN - SECOND FLOOR	Phase 100% CONSTRUCTION DOCUMENTS	Project Title VA Miami Renovate Interior Corridors Building 1	Project Number VA Project No. 546-23-112 RDC/JPA Project No. 23061.00
		RDC JPA ARCHITECTURE		STATE OF FLORIDA JASON H. ROSS REGISTERED ARCHITECT AR101907	VA U.S. Department of Veterans Affairs	Approved: MATTHEW KING	FULLY SPRINKLERED	Location VAMC Miami, Florida	Building Number 1
1 ADD #1 3/19/2025		524 Fernwood Drive, Altamonte Springs, Florida 32701 www.rdcjpa.com 800.362.1523						Issue Date 09/29/2023	Drawing Number AF201-F
Revisions								Checked SO	Drawn NH

GENERAL FINISH PLAN NOTES

- A. Provide resilient or metal transition strip at all flooring material junctures. Material transitions, where applicable, occur at center of door panel. Refer to details for typical floor material transitions. Color selected by architect from manufacturers full range of colors.
- B. Paint underside and faces of bulkheads (P-5); unless noted otherwise.
- C. All hollow metal doors and frames to be painted (P-4).
- D. All exposed mechanical grilles, diffusers, metal panels, and trim devices shall be painted to match adjacent wall finish.
- E. Coordinate the installation of handrails and crash rails with existing wall framing.
- F. All walls to be painted (P-1); unless noted otherwise. Confirm accent paint color and location with architect in field before proceeding with finish work.
- G. Provide metal edge trim where wall tile meets wall base and ceilings.
- H. All walls shall receive rubber wall base (RB-1), unless noted otherwise.
- J. All walls in project scope shall receive 4H rigid vinyl wall protection (WP-1); unless noted otherwise.

Ref Sheet AF202-W


Ref Sheet AF203-W

Ref Sheet AF204-W

WALL FINISH & PROTECTION PLAN - SECOND FLOOR -


ZONE 1

Scale: 3/32" = 1'-0"

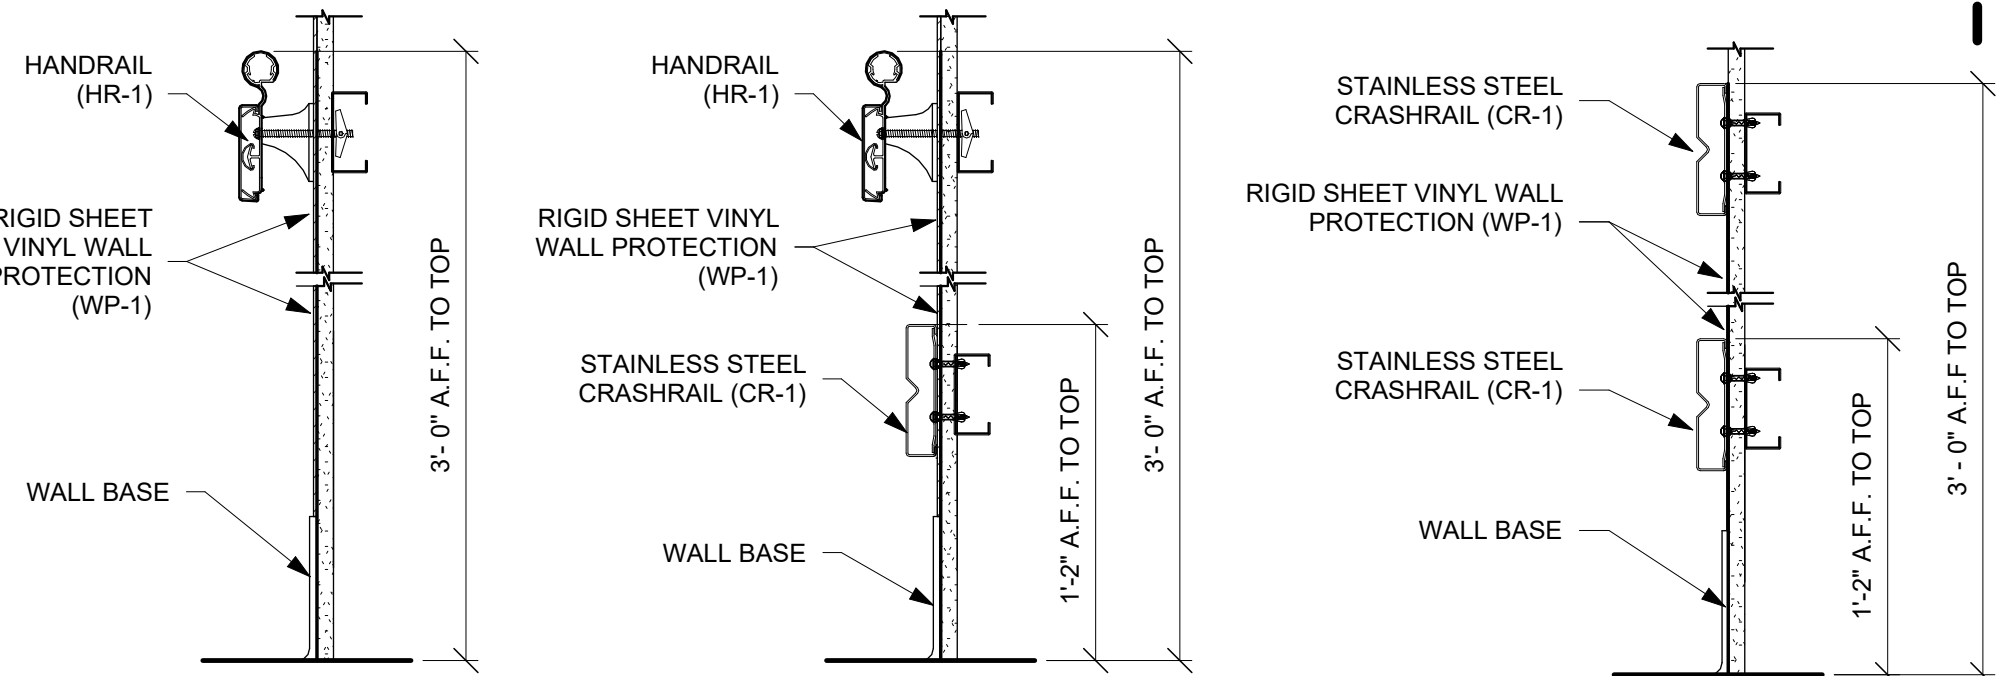

TYP. WALL PROTECTION INSTALL DETAILS

Scale: N.T.S.

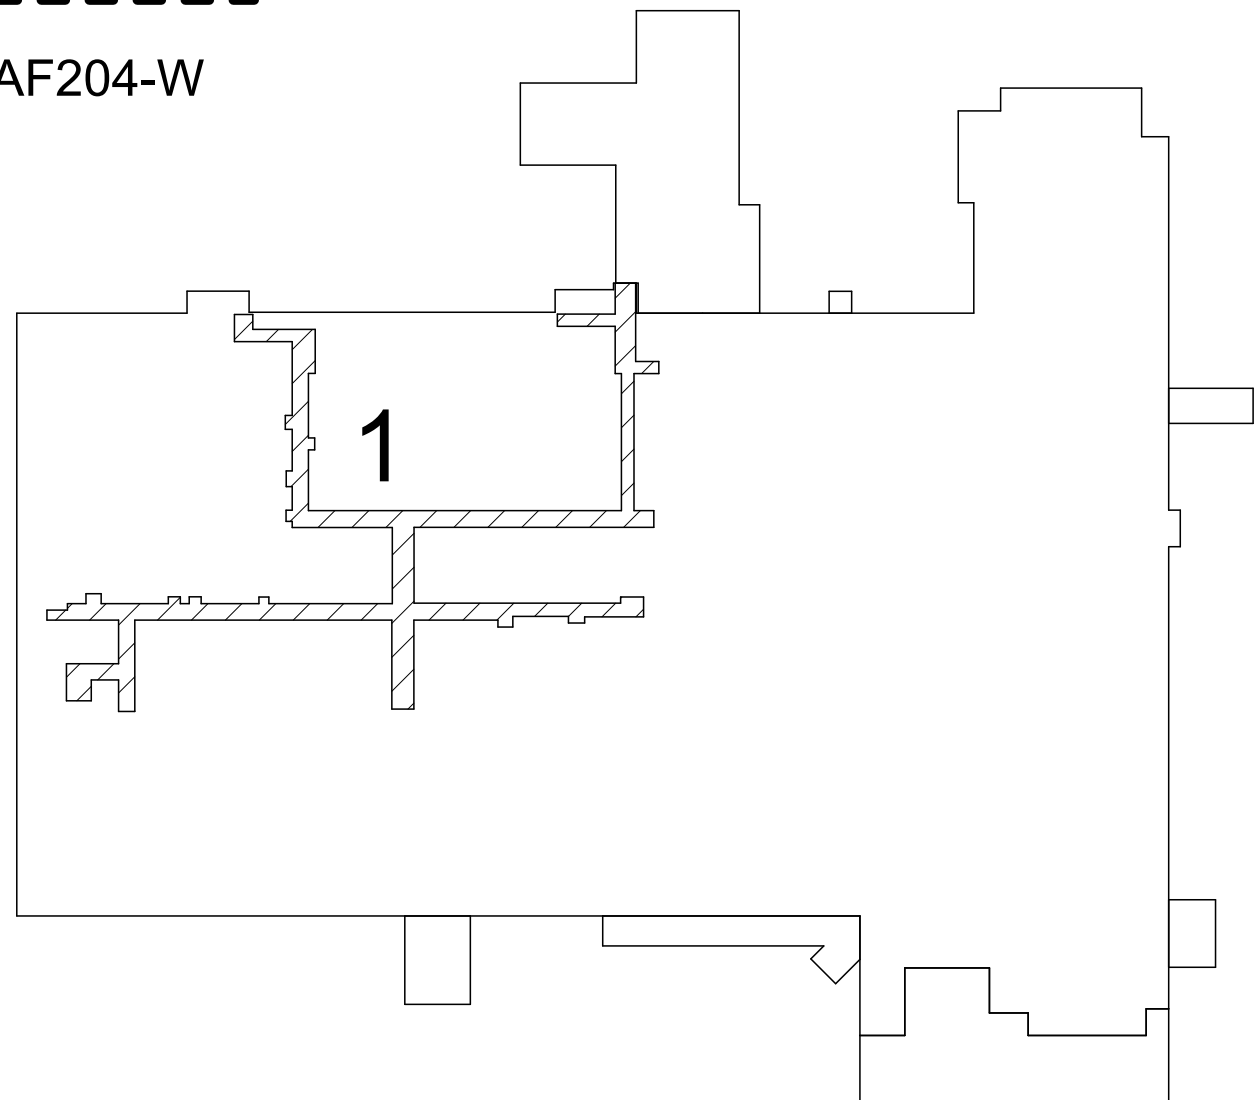

CONSULTANT		ARCHITECT/ENGINEER OF RECORD		STAMP		Office of Construction and Facilities Management		Drawing Title		Phase		Project Title		Project Number	
		RDC JPA		STATE OF FLORIDA JASON H. ROSS REGISTERED ARCHITECT AR101907		VA		WALL FINISH & PROTECTION PLAN - SECOND FLOOR		100% CONSTRUCTION DOCUMENTS		VA Miami Renovate Interior Corridors Building 1		VA Project No. 546-23-112 RDC/JPA Project No. 23061.00	
		ARCHITECTURE				U.S. Department of Veterans Affairs		Approved: MATTHEW KING		FULLY SPRINKLERED		Location VAMC Miami, Florida		Building Number 1	
		524 Fernwood Drive, Altamonte Springs, Florida 32701 www.rdcjpa.com 800.362.1523										Issue Date 09/29/2023		Drawing Number AF201-W	
												Checked SO		Drawn NH	